

Wideband Frequency Mixer

HJK-272H+

Level 17 (LO Power +17 dBm) 600 to 2700 MHz



CASE STYLE: TTT881
PRICE: \$9.95 ea. QTY. (10)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
LO & RF Power	+20 dBm

Permanent damage may occur if any of these limits are exceeded.

Pad Connections

LO	2
RF	1
IF	3
GROUND	4,5,6

Features

- wideband
- good L-R isolation, 35 dB typ.
- compression, 3 dB higher than LO power
- protected by US Patent 6,807,407


Applications

- base stations
- communication systems
- cellular
- PCS
- DCS
- radar

Electrical Specifications at 25°C

Parameter	Min.	Typ.	Max.	Unit
Frequency Range, RF/LO	600	—	2700	MHz
Frequency Range, IF	10	—	1000	MHz
Conversion Loss	—	7.7	8.9	dB
LO to RF Isolation	28	35	—	dB
LO to IF Isolation	17	23	—	dB
IP3	—	25	—	dBm
RF Input Power at 1 dB Compression	—	+20	—	dBm

Outline Drawing

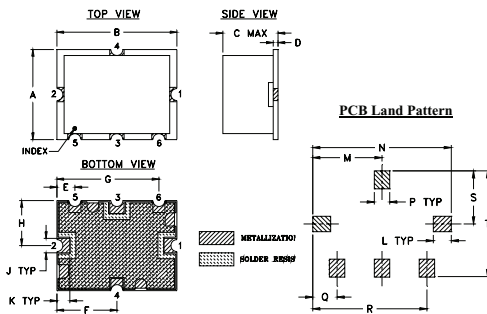


Suggested Layout, Tolerance to be within ±.002

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J	K
.38	.50	.23	.020	.075	.250	.425	.187	.050	.050
9.65	12.70	5.84	0.51	1.91	6.35	10.80	4.75	1.27	1.27
L	M	N	P	Q	R	S	T	wt.	
.070	.270	.540	.060	.095	.445	.208	.415	grams	
1.78	6.86	13.72	1.52	2.41	11.30	5.28	10.54	0.8	

Demo Board MCL P/N: TB-12 Suggested PCB Layout (PL-079)

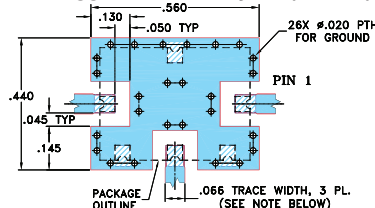


NOTE:

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. THE USE OF SOLDER MASK OVER THE GROUND AREA UNDER THE UNIT AS SHOWN IS RECOMMENDED TO PREVENT POTENTIAL SHORTING. IF USER CHOOSES TO EXPOSE METAL UNDER THE ENTIRE UNIT GROUND PAD FOR IMPROVED GROUNDING, IT IS RECOMMENDED A SOLDER MASK DAM BE APPLIED AROUND EACH GROUND PAD TO ENSURE FILLET AND CONNECTION AT GROUND PADS.
3. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 - DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER), SEE NOTE 2.
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)		Isolation L-R (dB)		Isolation L-I (dB)		VSWR RF Port (:1)		VSWR LO Port (:1)		IP3 (dBm)	
	RF	LO	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	
597.00	627.00	7.24	38.44	37.32	2.32	4.33	24.89					
642.50	672.50	7.08	39.44	36.29	2.27	4.33	25.35					
688.00	718.00	6.97	39.38	35.75	2.14	4.25	25.80					
779.00	809.00	6.79	46.14	43.45	1.94	4.04	25.09					
824.50	854.50	6.74	50.27	35.58	1.86	3.95	25.34					
936.75	966.75	6.61	53.04	30.83	1.77	3.68	26.11					
1010.25	1040.25	6.55	48.00	29.10	1.74	3.51	25.28					
1194.00	1224.00	6.55	40.81	27.69	1.62	3.14	25.46					
1267.50	1297.50	6.56	41.12	27.60	1.57	3.06	25.49					
1414.50	1444.50	6.69	43.94	28.29	1.47	2.99	25.60					
1561.50	1591.50	6.94	44.87	29.44	1.48	3.11	27.63					
1635.00	1665.00	7.33	47.81	31.00	1.49	3.21	27.84					
1708.50	1738.50	7.14	51.44	32.67	1.37	3.29	26.97					
1855.50	1885.50	6.81	45.18	35.94	1.15	3.44	25.87					
1929.00	1959.00	6.76	42.62	36.96	1.12	3.47	24.81					
2002.50	2032.50	6.69	40.99	35.71	1.14	3.45	24.94					
2112.75	2142.75	6.63	39.28	32.41	1.22	3.37	24.91					
2259.75	2289.75	6.81	46.55	28.70	1.40	3.13	25.52					
2400.00	2430.00	6.99	45.78	27.16	1.57	2.91	25.43					
2560.00	2590.00	7.25	38.37	24.84	1.79	2.64	25.51					
2720.00	2750.00	7.65	35.04	23.95	2.00	2.52	25.38					

Electrical Schematic

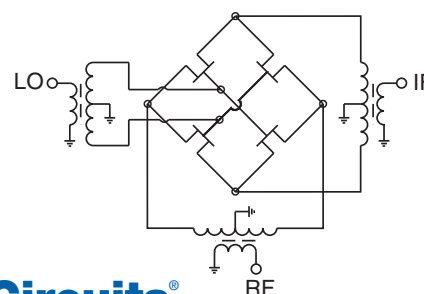


For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com


Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M137921
HJK-272H+
ED-14170/1
WL/CP/AM
120713
Page 1 of 2


HJK-272H+
CONVERSION LOSS

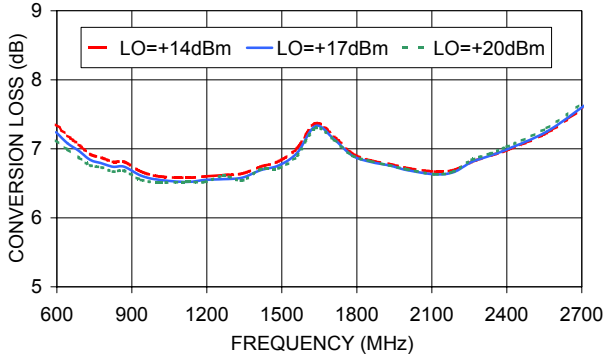


HJK-272H+
L-R ISOLATION

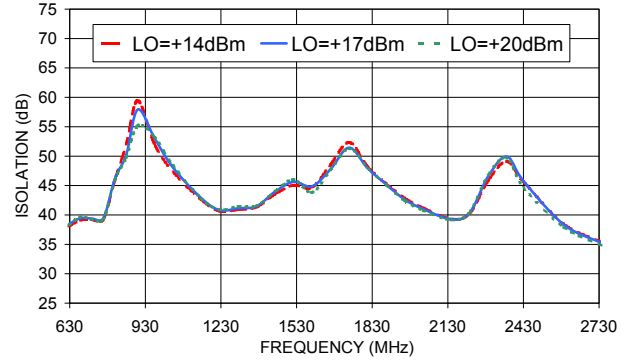


HJK-272H+
L-I ISOLATION

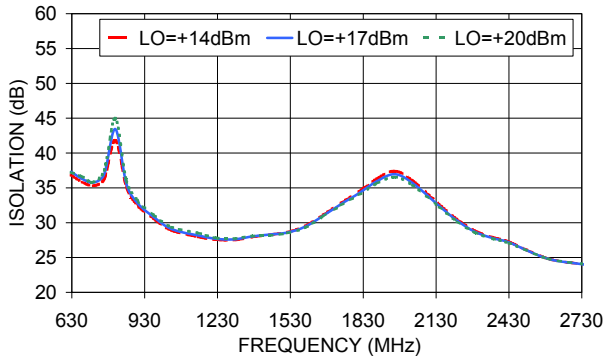


HJK-272H+
RF VSWR

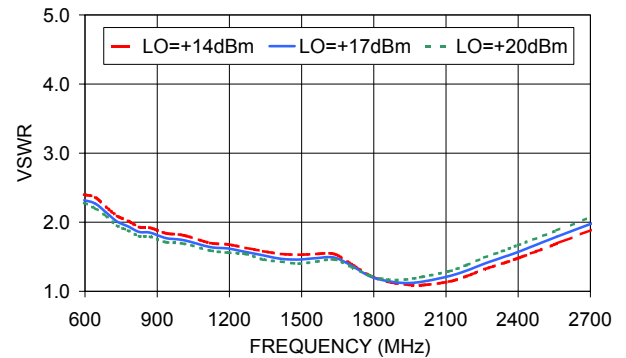

HJK-272H+
LO VSWR

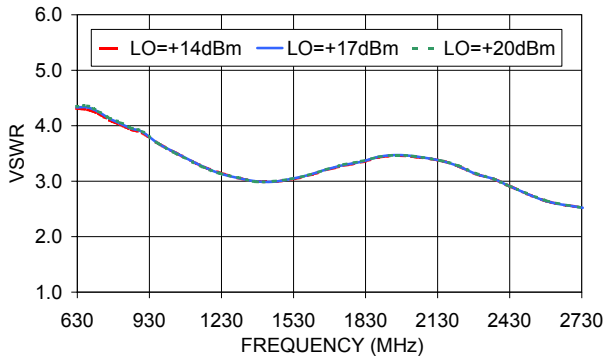

HJK-272H+
IF VSWR

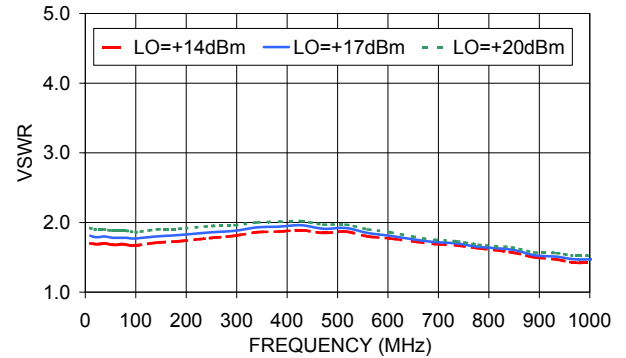

HJK-272H+
IP3

