

Frequency Mixer WIDE BAND

Level 7 (LO Power +7 dBm) 3700 to 10000 MHz

ZX05-14+



Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

LO	2
RF	3
IF	1

Features

- wide bandwidth, 3700 to 10000 MHz
- low conversion loss, 6.7 dB typ.
- high L-R isolation, 38 dB typ.
- excellent IF BW, DC to 4000 MHz
- rugged construction
- small size
- useable as up and down converter
- protected by US patents 6,790,049; 7,027,795

Applications

- satellite up and down converters
- defense radar and communications
- line of sight links
- federal fixed service
- WIFI
- blue tooth
- VSAT
- ISM


CASE STYLE: FL905

Connectors	Model	Price	Qty.
SMA	ZX05-14-S+	\$47.95	(1-24)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Outline Drawing

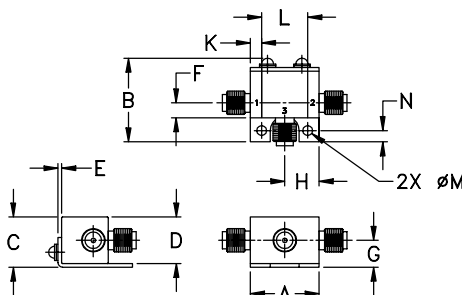

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.74	.90	.54	.50	.04	.16	.29
18.80	22.86	13.72	12.70	1.02	4.06	7.37

H	J	K	L	M	N	wt
.37	--	.122	.496	.106	.122	grams
9.40	--	3.10	12.60	2.69	3.10	20.0

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS* (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
		Typ.	σ	Max.	Typ.	Min.	Typ.	Min.	
3700-10000	LO/RF f_L-f_U								
	IF								
	DC-4000								
		Typ.	σ	Max.	Typ.	Min.	Typ.	Min.	Typ.
3700-6200		6.7	0.3	8.0	40	33	16	10	14
6200-10000		6.7	0.3	10	35	25	17	9	11


1 dB COMPR.: +1 dBm typ.

* Conversion loss at 30 MHz IF. σ is a measure of repeatability from unit to unit.

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
3700.10	3730.10	6.58	51.26	20.04	2.93	7.34
4100.10	4130.10	6.38	40.67	18.99	2.87	4.92
4500.10	4530.10	6.22	40.61	15.96	2.46	3.13
4900.10	4930.10	6.05	38.79	14.00	2.37	2.09
5300.10	5330.10	6.46	40.71	12.81	3.15	1.49
5700.10	5730.10	6.57	37.62	13.21	3.25	1.89
6100.10	6130.10	6.30	40.74	14.07	2.93	2.61
6200.10	6230.10	6.35	39.60	14.24	2.84	2.82
6600.10	6630.10	6.30	38.69	14.80	2.67	3.44
7000.10	7030.10	6.34	37.07	15.30	2.28	3.48
7400.10	7430.10	6.22	39.52	14.92	2.07	3.29
7800.10	7830.10	6.02	36.84	13.50	2.06	2.66
8200.10	8230.10	6.29	31.74	11.66	2.17	1.74
8600.10	8630.10	6.54	38.46	14.46	2.47	1.46
9000.10	9030.10	7.07	37.71	20.29	3.00	1.81
9400.10	9430.10	7.75	30.76	22.38	3.66	2.18
9700.10	9730.10	7.85	28.88	19.34	4.14	2.36
9800.10	9830.10	8.00	28.40	18.54	4.22	2.35
9900.10	9930.10	8.09	28.25	18.00	4.38	2.32
10000.10	10030.10	8.15	28.31	17.54	4.43	2.26

Electrical Schematic

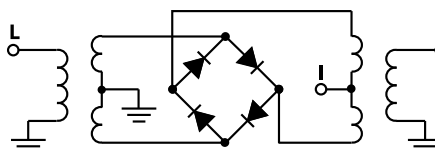

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine www.minicircuits.com Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M111660
ZX05-14+
ED-12902/1
DJ/TD/QL
091007
Page 1 of 2

