

X3 Frequency Multiplier

50Ω Output 6600 to 10005 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	17 dBm

Pin Connections

INPUT	1
OUTPUT	4
GROUND	2,3,5,6


Outline Drawing

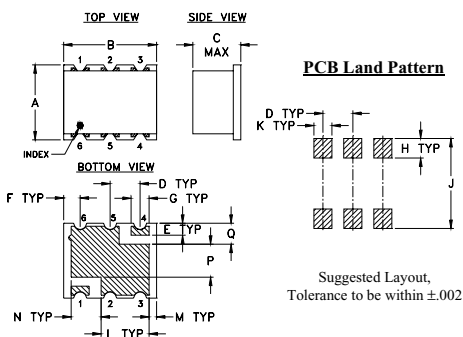

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
.25	.31	.16	.100	.040	.055	.060	.065
6.35	7.87	4.06	2.54	1.02	1.40	1.52	1.65
J	K	L	M	N	P	Q	wt.
.300	.060	.160	.025	.100	.110	.070	grams
7.62	1.52	4.06	0.64	2.54	2.79	1.78	0.16

Demo Board MCL P/N: TB-393 Suggested PCB Layout (PL-258)

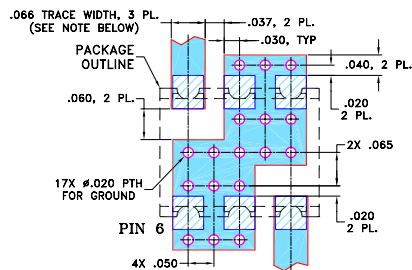

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- broadband
- high rejection F2, -40 dBc typ.; F4, -37 dBc typ.
- low cost
- aqueous washable

Applications

- synthesizers
- local oscillators
- satellite up and down converters





Electrical Specifications

MULTIPLICATION FACTOR	FREQUENCY (MHz)		INPUT POWER (dBm)		CONVERSION LOSS (dB)	*HARMONIC OUTPUT (dBc)		
	F1 Input	F3 Output	Min.	Max.		F1 Typ. Min.	F2 Typ. Min.	F4 Typ. Min.
3	2200-3335	6600-10005	13	17	14.5 19.5	6 -3	40 24	37 24

* Harmonics of input frequency below the power level of F3

Typical Performance Data

INPUT RF= 13 dBm					INPUT RF= 17 dBm			
Input Frequency (MHz)	Conversion Loss (dB)	Harmonic Output Below F3 (-dBc)			Conversion Loss (dB)	Harmonic Output Below F3 (-dBc)		
		F3	F1	F2		F3	F1	F2
2200.10	17.56	5.32	43.75	43.93	15.99	9.90	46.46	45.20
2250.10	16.99	5.59	42.88	44.04	15.23	10.36	45.57	47.62
2300.10	16.36	5.92	43.07	41.86	14.79	10.42	45.21	49.62
2350.10	15.36	6.54	44.24	41.67	14.38	10.50	45.15	52.71
2400.10	15.09	6.65	45.10	41.17	14.04	10.60	45.20	53.58
2450.10	15.07	6.31	45.17	41.50	14.06	10.24	44.93	53.05
2475.10	14.76	6.46	45.20	41.15	14.17	9.94	44.72	52.06
2500.10	15.01	5.66	44.70	40.70	14.11	9.49	44.23	51.31
2550.10	14.56	5.78	43.31	41.17	14.07	9.23	43.66	50.12
2650.10	14.94	5.02	42.27	36.21	14.59	8.36	42.85	41.98
2700.10	14.96	4.68	42.04	36.18	14.71	7.94	42.87	40.92
2739.10	15.44	4.13	42.28	34.37	14.64	7.84	43.35	38.63
2817.10	15.58	3.63	41.72	38.06	14.98	7.17	42.32	39.36
2856.10	15.23	3.81	42.18	38.39	15.16	6.85	42.10	37.45
2895.10	15.77	3.10	42.15	40.27	15.30	6.51	40.79	36.91
3012.10	15.84	2.71	42.56	58.96	15.63	5.80	37.81	48.47
3090.10	15.99	2.35	44.58	49.84	15.47	5.78	37.33	60.17
3168.10	16.16	1.96	46.81	46.38	15.64	5.34	36.86	48.04
3246.10	16.40	1.52	45.57	43.66	16.07	4.70	36.57	46.65
3335.10	17.16	0.61	43.37	43.19	16.18	4.30	35.69	46.98

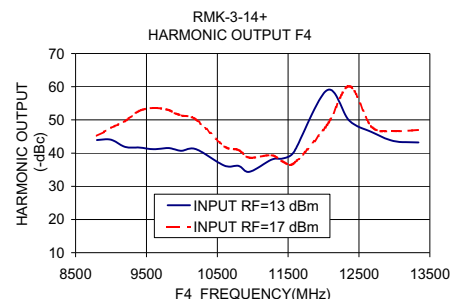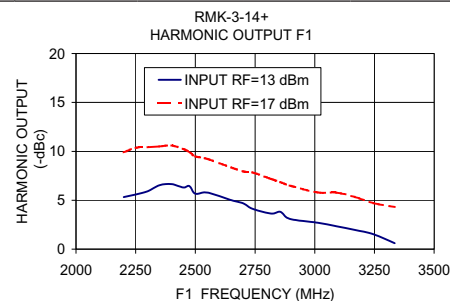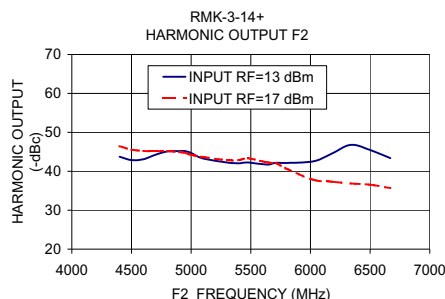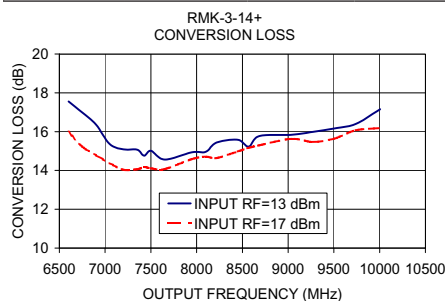

CASE STYLE: TT1224

PRICE: \$9.95 ea. QTY (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com
IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. OR
M115192
RMK-3-14+
ED-13158/3
DJ/CP
081219