

X2 Frequency Multiplier

50Ω Output 0.1 to 300 MHz

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Input Power 200mW

Permanent damage may occur if any of these limits are exceeded.

Features

- low insertion loss, 11 dB typ.
- rugged shielded case

Applications

- synthesizers
- local oscillators


MK-3



CASE STYLE: L19

Connectors	Model	Price	Qty.
SMA	MK-3	\$47.95	(1-9)
BRACKET (OPTION "B")		\$5.00	(1+)
BRACKET (OPTION "BR")		\$1.50	(1+)

Outline Drawing

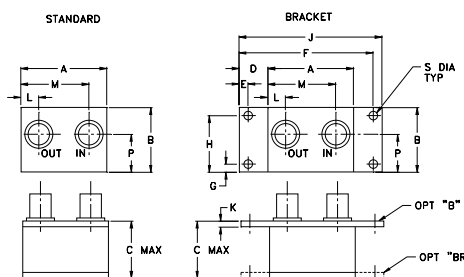

Outline Dimensions (inch)

A	B	C	D	E	F	G	H
1.50	1.13	1.00	.50	.155	2.345	.138	.987
38.10	28.70	25.40	12.70	3.94	59.56	3.51	25.07

J	K	L	M	N	P	S	wt
2.50	.10	.31	1.19	--	.66	.150	grams
63.50	2.54	7.87	30.23	--	16.76	3.81	37.0





Electrical Specifications

MULTIPLICATION FACTOR	FREQUENCY (MHz)		INPUT POWER (dBm)		CONVERSION LOSS (dB)		*HARMONIC OUTPUT (dBc)					
	F1	F2	Min.	Max.	Typ.	Max.	F1	F3	F4	Typ.	Min.	Typ.
	Input	Output										
2	0.05-50	0.1-100	0	13	11.0	17.0	40	28	45	30	16	12
	50-150	100-300	0	13	11.5	15.0	35	20	40	20	16	12

* Harmonics of input frequency below the power level of F2

Typical Performance Data

Input Frequency (MHz)	Conversion Loss (dB) F2	Harmonic Output (-dBc)			
		F1	F3	F4	
0.10	10.92	59.00	68.00	14.40	
1.00	10.44	60.00	73.00	14.20	
5.00	10.38	55.00	61.60	18.20	
10.00	10.47	54.20	55.60	20.00	
25.00	10.62	48.60	51.30	19.30	
50.00	10.78	45.00	45.00	20.80	
75.00	10.63	43.00	40.00	21.50	
100.00	10.93	38.00	37.60	21.40	
125.00	11.39	37.00	35.60	24.00	
150.00	11.43	36.70	40.00	32.00	

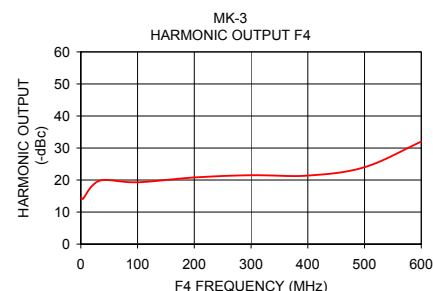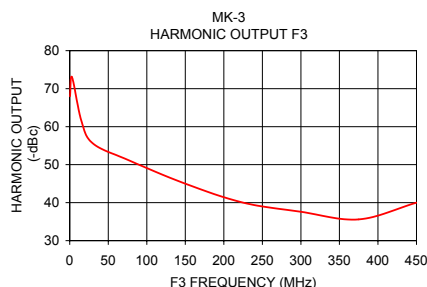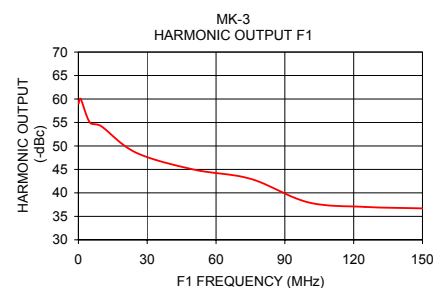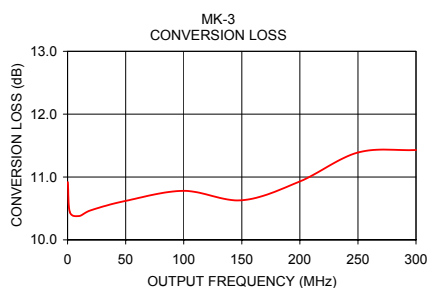

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

