

Coaxial Matching Pad

50/75Ω

DC to 2000 MHz

BMP-5075+



Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Input Power	0.25W

Permanent damage may occur if any of these limits are exceeded.

Features

- excellent VSWR 1.15: typ.
- excellent flatness
- wideband coverage, DC to 2000 MHz

Applications

- impedance matching


CASE STYLE: FF55

Connectors	Model	Price	Qty.
75ΩM-BNC	BMP-5075+	\$24.95 ea.	(1-9)
50ΩF-BNC			

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Outline Drawing

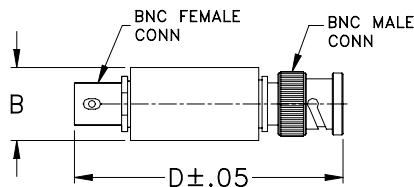

Outline Dimensions (inch/mm)

B	D	wt
.54	2.59	grams
13.72	65.79	40.0

Electrical Schematic


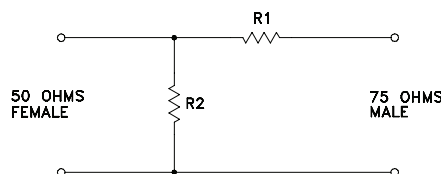


Electrical Specifications

FREQ. (MHz)	ATTENUATION (dB) Flatness Max.			VSWR (:1) Max.			POWER (W)	
	DC-100 MHz	100-1000 MHz	1000-2000 MHz	DC-100 MHz	100-1000 MHz	1000-2000 MHz		
$f_L - f_U$	Nom.							
DC-2000	5.7±0.1	0.2	0.3	0.4	1.06	1.22	1.4	0.25

Typical Performance Data

Frequency (MHz)	Attenuation (dB)	VSWR (:1)	
		50 Ω	75 Ω
10.00	5.71	1.00	1.00
20.00	5.72	1.00	1.00
60.00	5.72	1.01	1.01
100.00	5.72	1.01	1.01
110.00	5.73	1.01	1.01
555.00	5.75	1.09	1.12
1000.00	5.78	1.18	1.22
1010.00	5.77	1.18	1.22
1505.00	5.75	1.08	1.19
2000.00	5.70	1.23	1.07

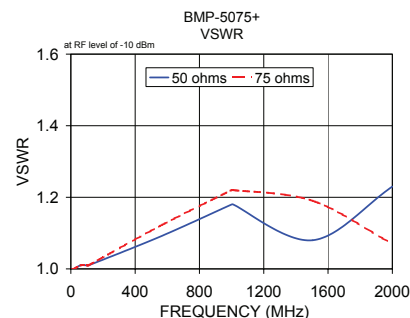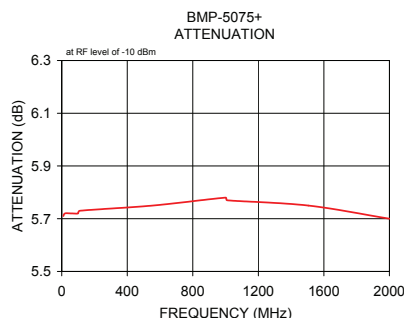

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

