


Plug-In Limiter

PLS-2+

50Ω Broadband, 100 to 900 MHz



CASE STYLE: A01
PRICE: \$27.70 ea. QTY. (1-9)

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Input Power	100mW
Control Current	10mA


Permanent damage may occur if any of these limits are exceeded.

Pin Connections

INPUT	1
OUTPUT	8
CONTROL	3,4^
GROUND	2,5,6,7
CASE GROUND	2,5,6,7

^ pins must be connected together externally

Outline Drawing

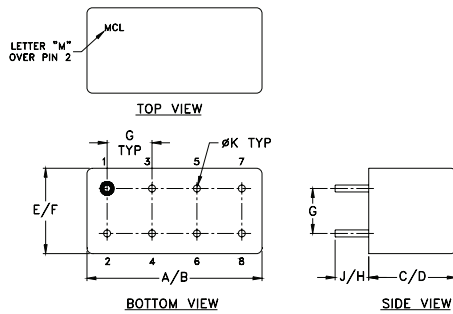

Outline Dimensions (inch/mm)

A	B	C	D	E	F	
.770	.800	.385	.400	.370	.400	
19.56	20.32	9.78	10.16	9.40	10.16	
G	H	J	K			wt
.200	.20	.14	.031			grams
5.08	5.08	3.56	0.79			5.2

Features

- wideband, 100 to 900 MHz
- very small phase variation
- hermetic shielded case

Applications

- military, hi-rel applications
- stabilizing generator outputs
- reducing amplitude variations
- providing constant amplitude signals in phase sensitive systems

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications




Electrical Specifications

Parameter	Condition	Min.	Typ.	Max.	Units	
Frequency Range	—	100	—	900	MHz	
Input Power	—	3.0	—	15	dBm	
Output Power*	—	—	-5.0	—	dBm	
Control Current	—	—	5.0	—	mA	
Limiting Δ Output/1dB Δ Input	Amplitude	Input Power Range (dBm)				
		3 to 8	—	0.2	—	dB/dB
		8 to 12	—	0.4	—	
	12 to 15	—	0.4	—		
	Phase	3 to 8	—	2	—	°/dB
		8 to 12	—	2	—	
12 to 15		—	2	—		

* Typical output level at typical control current, level maybe changed by varying current.

Typical Performance Data

Frequency (MHz)	Power Output		Delta (dB)	Amplitude Delta, out dBm Input			Phase Delta, Out dBm Input		
	(15 dBm IN) (dBm)	(3 dBm IN) (dBm)		15-12 (dB)	12-8 (dB)	8-3 (dB)	15-12 (deg.)	12-8 (deg.)	8-3 (deg.)
100.00	-3.51	-3.86	0.35	0.02	0.02	0.35	1.10	0.94	0.70
140.00	-3.46	-3.83	0.37	0.01	0.02	0.37	0.83	1.36	0.76
180.00	-3.40	-3.79	0.38	0.00	0.03	0.37	0.76	1.59	1.01
220.00	-3.34	-3.72	0.38	0.01	0.04	0.36	0.61	1.32	1.81
260.00	-3.29	-3.65	0.36	0.01	0.04	0.35	0.39	1.36	2.90
320.00	-3.23	-3.62	0.39	0.01	0.05	0.37	0.21	0.54	4.48
360.00	-3.20	-3.66	0.46	0.00	0.05	0.42	0.67	2.30	5.85
400.00	-3.20	-3.73	0.53	0.00	0.08	0.47	1.70	2.61	5.03
440.00	-3.26	-3.82	0.56	0.00	0.09	0.49	1.05	0.08	3.60
480.00	-3.49	-3.93	0.44	0.06	0.04	0.47	1.44	0.99	4.78
520.00	-3.74	-4.04	0.30	0.12	0.03	0.46	0.75	0.66	4.68
560.00	-3.97	-4.18	0.21	0.15	0.07	0.45	0.28	1.32	3.94
600.00	-4.07	-4.31	0.25	0.14	0.07	0.47	0.80	2.38	3.30
640.00	-4.15	-4.48	0.33	0.13	0.04	0.52	1.75	1.89	2.59
680.00	-4.24	-4.67	0.43	0.16	0.02	0.60	0.59	0.20	0.60
740.00	-4.54	-5.00	0.46	0.27	0.06	0.69	1.21	4.40	5.11
780.00	-4.89	-5.22	0.33	0.35	0.01	0.70	0.06	2.16	8.70
820.00	-5.40	-5.44	0.04	0.47	0.15	0.68	1.59	1.94	7.33
860.00	-5.71	-5.62	0.09	0.60	0.16	0.70	4.24	4.91	7.02
900.00	-5.92	-5.75	0.17	0.71	0.15	0.71	5.90	6.07	6.23

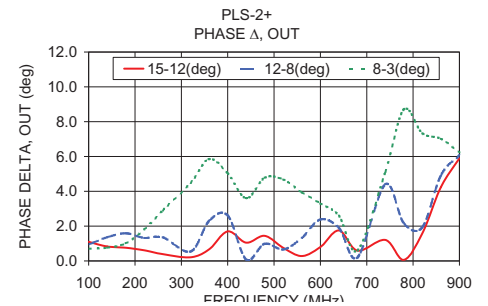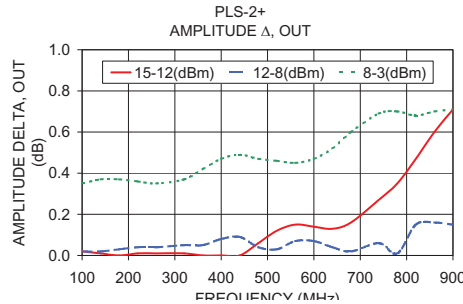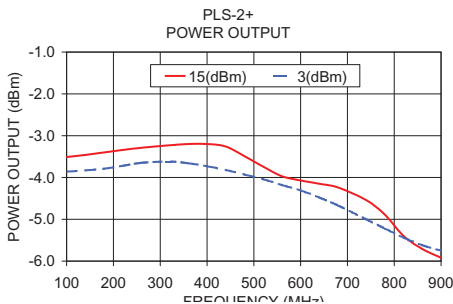

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. C
M128455
PLS-2+
DJ/VV/CP/AM
121002