

## Voltage Controlled Oscillator

ROS-950-219+

Linear Tuning 850 to 950 MHz

## Features

- linear tuning characteristics
- low phase noise
- low pushing
- low pulling
- aqueous washable

## Applications

- radio link
- cellular base station



CASE STYLE: CK1113

PRICE: \$15.95 ea. QTY (5-49)

## +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

## Electrical Specifications

| MODEL NO.    | FREQ. (MHz) |      | POWER OUTPUT (dBm) | PHASE NOISE<br>dBc/Hz SSB at offset frequencies,kHz<br><br>Typ. |      |      |      | TUNING            |                       |               |                                 |             | NON HARMONIC SPURIOUS (dBc) | HARMONICS (dBc) |      | PULLING<br>pk-pk @12 dB<br>(MHz) | PUSHING (MHz/V) | DC OPERATING POWER |    |
|--------------|-------------|------|--------------------|-----------------------------------------------------------------|------|------|------|-------------------|-----------------------|---------------|---------------------------------|-------------|-----------------------------|-----------------|------|----------------------------------|-----------------|--------------------|----|
|              |             |      |                    |                                                                 |      |      |      | VOLTAGE RANGE (V) | SENSI- TIVITY (MHz/V) | PORT CAP (pF) | 3 dB MODULATION BANDWIDTH (MHz) | Vcc (volts) |                             |                 |      |                                  |                 | Current (mA)       |    |
|              | Min.        | Max. | Typ.               | 1                                                               | 10   | 100  | 1000 | Min.              | Max.                  | Typ.          | Typ.                            | Typ.        | Typ.                        | Typ.            | Max. | Typ.                             | Typ.            | Max.               |    |
| ROS-950-219+ | 850         | 950  | +6                 | -89                                                             | -117 | -139 | -156 | 0.5               | 12                    | 9-13          | 70                              | 30          | -90                         | -20             | -12  | 0.5                              | 0.5             | 5.5                | 30 |


## Pin Connections

|        |                                |
|--------|--------------------------------|
| RF OUT | 10                             |
| VCC    | 14                             |
| V-TUNE | 2                              |
| GROUND | 1,3,4,5,6,7,8,9,11,12,13,15,16 |


## Maximum Ratings

|                                                                 |                |
|-----------------------------------------------------------------|----------------|
| Operating Temperature                                           | -55°C to 85°C  |
| Storage Temperature                                             | -55°C to 100°C |
| Absolute Max. Supply Voltage (Vcc)                              | 7V             |
| Absolute Max. Tuning Voltage (Vtune)                            | 14V            |
| All specifications                                              | 50 ohm system  |
| Permanent damage may occur if any of these limits are exceeded. |                |

## Outline Drawing

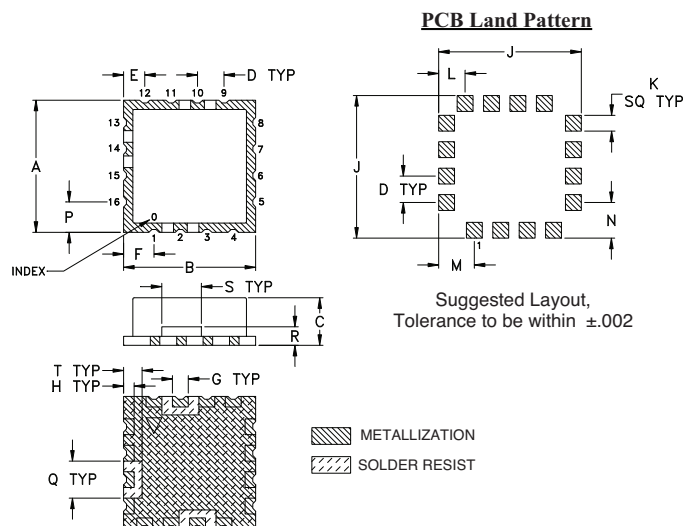

**Demo Board MCL P/N: TB-10**  
**Suggested PCB Layout (PL-012)**

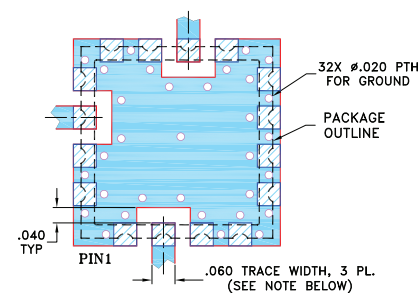

## NOTES:

1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE BOTTOM IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Outline Dimensions (inch mm)

| A     | B     | C    | D    | E    | F    | G    | H    | J     | K    | L    | M    | N    | P    | Q    | R    | S    | T    | wt.   |
|-------|-------|------|------|------|------|------|------|-------|------|------|------|------|------|------|------|------|------|-------|
| .500  | .500  | .220 | .100 | .080 | .115 | .060 | .040 | .540  | .060 | .100 | .135 | .135 | .115 | .140 | .070 | .150 | .070 | grams |
| 12.70 | 12.70 | 5.59 | 2.54 | 2.03 | 2.92 | 1.52 | 1.02 | 13.72 | 1.52 | 2.54 | 3.43 | 3.43 | 2.92 | 3.56 | 1.78 | 3.81 | 1.78 | 1.2   |

# Performance Data & Curves\*

# ROS-950-219+

| V<br>TUNE | TUNE<br>SENS<br>(MHz/V) | FREQUENCY<br>(MHz) |       |       | POWER OUTPUT<br>(dBm) |       |       | Icc<br>(mA) | HARMONICS (dBc) |       |       | FREQ.<br>PUSH<br>(MHz/V) | FREQ.<br>PULL<br>(MHz) | PHASE NOISE (dBc/Hz)<br>at offsets |        |        |        | FREQ<br>OFFSET<br>(KHz) | PHASE<br>NOISE at<br>895 MHz<br>(dBc/Hz) |
|-----------|-------------------------|--------------------|-------|-------|-----------------------|-------|-------|-------------|-----------------|-------|-------|--------------------------|------------------------|------------------------------------|--------|--------|--------|-------------------------|------------------------------------------|
|           |                         | -55°C              | +25°C | +85°C | -55°C                 | +25°C | +85°C |             | F2              | F3    | F4    |                          |                        | 1kHz                               | 10kHz  | 100kHz | 1MHz   |                         |                                          |
| 0.00      | 16.41                   | 827.0              | 824.9 | 823.9 | 5.91                  | 5.68  | 4.56  | 25.40       | -20.9           | -35.0 | -47.9 | 0.65                     | 0.50                   | -86.8                              | -114.5 | -135.7 | -156.0 | 1.0                     | -88.35                                   |
| 0.50      | 13.59                   | 835.2              | 833.1 | 832.1 | 6.00                  | 5.81  | 4.84  | 25.46       | -20.9           | -34.3 | -44.2 | 0.29                     | 0.44                   | -87.1                              | -116.5 | -137.6 | -155.6 | 2.0                     | -98.49                                   |
| 1.00      | 12.27                   | 842.0              | 839.9 | 838.8 | 6.08                  | 5.91  | 5.06  | 25.50       | -20.6           | -33.6 | -41.3 | 0.20                     | 0.43                   | -89.8                              | -117.8 | -138.2 | -156.0 | 3.5                     | -107.08                                  |
| 1.50      | 11.60                   | 848.1              | 846.0 | 844.8 | 6.17                  | 6.02  | 5.25  | 25.53       | -20.3           | -32.9 | -39.5 | 0.16                     | 0.42                   | -90.3                              | -117.1 | -138.9 | -156.4 | 6.0                     | -112.83                                  |
| 2.00      | 11.29                   | 854.0              | 851.8 | 850.6 | 6.23                  | 6.10  | 5.40  | 25.54       | -20.3           | -32.5 | -38.0 | 0.13                     | 0.42                   | -89.8                              | -117.8 | -138.8 | -156.1 | 8.5                     | -116.18                                  |
| 2.50      | 11.21                   | 859.6              | 857.5 | 856.2 | 6.29                  | 6.16  | 5.50  | 25.53       | -20.2           | -32.1 | -36.7 | 0.11                     | 0.46                   | -91.9                              | -117.5 | -139.2 | -157.1 | 10.0                    | -117.23                                  |
| 3.00      | 11.31                   | 865.3              | 863.1 | 861.7 | 6.37                  | 6.21  | 5.59  | 25.52       | -20.0           | -32.0 | -35.8 | 0.07                     | 0.50                   | -90.4                              | -118.2 | -139.1 | -155.7 | 20.8                    | -125.22                                  |
| 4.00      | 11.80                   | 876.7              | 874.5 | 873.0 | 6.55                  | 6.32  | 5.73  | 25.45       | -19.7           | -31.2 | -33.9 | 0.01                     | 0.54                   | -89.9                              | -119.1 | -140.8 | -156.7 | 35.5                    | -130.32                                  |
| 5.00      | 12.34                   | 888.6              | 886.4 | 885.0 | 6.75                  | 6.39  | 5.82  | 25.35       | -19.5           | -31.2 | -32.6 | 0.09                     | 0.50                   | -89.9                              | -119.4 | -141.1 | -156.1 | 60.7                    | -134.43                                  |
| 6.00      | 12.51                   | 900.8              | 898.9 | 897.6 | 6.93                  | 6.43  | 5.85  | 25.27       | -19.4           | -31.5 | -31.3 | 0.04                     | 0.34                   | -87.9                              | -117.1 | -139.3 | -156.6 | 86.7                    | -138.40                                  |
| 7.00      | 12.15                   | 912.9              | 911.3 | 910.3 | 7.07                  | 6.44  | 5.86  | 25.21       | -19.4           | -32.3 | -30.5 | 0.14                     | 0.19                   | -88.0                              | -115.2 | -138.0 | -155.0 | 100.0                   | -139.65                                  |
| 8.00      | 11.40                   | 924.6              | 923.3 | 922.6 | 7.08                  | 6.37  | 5.81  | 25.18       | -19.9           | -33.0 | -30.7 | 0.40                     | 0.31                   | -87.4                              | -115.7 | -137.8 | -155.6 | 148.1                   | -142.83                                  |
| 8.50      | 10.94                   | 930.2              | 929.0 | 928.4 | 7.10                  | 6.37  | 5.81  | 25.16       | -20.1           | -33.5 | -30.6 | 0.55                     | 0.42                   | -84.8                              | -115.2 | -137.4 | -157.8 | 177.0                   | -144.21                                  |
| 9.00      | 10.43                   | 935.6              | 934.5 | 933.9 | 7.10                  | 6.36  | 5.80  | 25.14       | -20.5           | -33.9 | -30.7 | 0.69                     | 0.51                   | -87.5                              | -115.2 | -139.3 | -155.3 | 211.6                   | -144.77                                  |
| 9.50      | 9.92                    | 940.8              | 939.7 | 939.2 | 7.09                  | 6.34  | 5.78  | 25.14       | -20.9           | -34.2 | -30.8 | 0.82                     | 0.60                   | -87.8                              | -115.3 | -139.1 | -155.7 | 302.4                   | -146.21                                  |
| 10.00     | 9.42                    | 945.7              | 944.7 | 944.2 | 7.06                  | 6.30  | 5.75  | 25.14       | -21.2           | -34.2 | -31.3 | 0.95                     | 0.67                   | -87.5                              | -114.6 | -139.6 | -157.8 | 361.5                   | -149.45                                  |
| 10.50     | 8.91                    | 950.4              | 949.4 | 948.9 | 7.03                  | 6.25  | 5.71  | 25.15       | -21.6           | -34.1 | -31.5 | 1.06                     | 0.71                   | -88.0                              | -115.3 | -139.8 | -156.0 | 507.5                   | -152.29                                  |
| 11.00     | 8.42                    | 954.8              | 953.8 | 953.4 | 7.00                  | 6.20  | 5.66  | 25.16       | -22.0           | -34.2 | -31.9 | 1.15                     | 0.74                   | -87.0                              | -115.0 | -139.9 | -155.2 | 606.7                   | -154.02                                  |
| 11.50     | 7.94                    | 959.0              | 958.0 | 957.6 | 6.96                  | 6.15  | 5.61  | 25.18       | -22.7           | -33.9 | -32.8 | 1.22                     | 0.75                   | -87.5                              | -114.6 | -140.1 | -156.4 | 851.6                   | -156.66                                  |
| 12.00     | 7.47                    | 962.9              | 962.0 | 961.6 | 6.91                  | 6.09  | 5.55  | 25.21       | -23.2           | -33.4 | -33.6 | 1.28                     | 0.76                   | -87.6                              | -114.7 | -139.6 | -156.1 | 1000.0                  | -156.64                                  |

\*at 25°C unless mentioned otherwise

