

Voltage Controlled Oscillator

ROS-2252C-119+

Linear Tuning 2103 to 2252 MHz

Features

- linear tuning characteristics
- low phase noise
- low pushing
- low pulling
- aqueous washable

Applications

- wireless communications
- point-to-point radio



CASE STYLE: CK1113

PRICE: \$15.95 ea. QTY (5-49)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies,kHz Typ.				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @12 dB (MHz)	PUSHING (MHz/V)	DC OPERATING POWER Vcc Current (volts) (mA)	
								VOLTAGE RANGE (V)	SENSI- TIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)								
	Min.	Max.	Typ.	1	10	100	1000	Min.	Max.	Typ.	Typ.	Typ.	Typ.	Typ.	Max.	Typ.	Typ.	Max.	
ROS-2252C-119+	2103	2252	-1	-81	-108	-129	-149	1	12	28	20	120	-90	-17	-10	0.4	0.3	8	35

Pin Connections

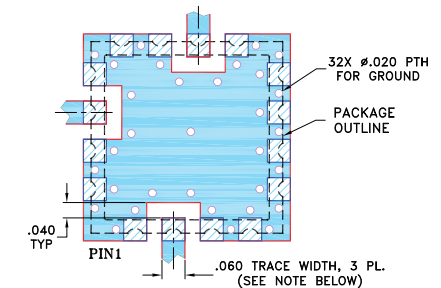
RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	9V
Absolute Max. Tuning Voltage (Vtune)	14V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

Demo Board MCL P/N: TB-10
Suggested PCB Layout (PL-012)

NOTES:

- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE BOTTOM IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.220	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070	grams
12.70	12.70	5.59	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.2

Performance Data & Curves*

ROS-2252C-119+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 2142 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	40.87	1954.3	1949.8	1946.2	-0.45	-1.53	-2.27	27.19	-21.7	-21.4	-60.2	1.70	0.32	-78.0	-104.7	-125.4	-145.7	1.0	-80.74
0.40	36.93	1970.8	1966.1	1962.7	-0.97	-1.59	-2.14	27.14	-23.1	-19.9	-59.2	1.40	0.48	-78.7	-105.5	-126.5	-146.9	2.0	-89.97
1.00	33.86	1993.0	1988.2	1984.8	-1.33	-1.64	-2.05	27.06	-23.5	-18.0	-59.2	1.01	0.57	-79.9	-106.5	-127.3	-148.1	3.5	-97.09
2.00	32.19	2026.6	2021.5	2018.0	-1.43	-1.49	-1.97	26.96	-22.6	-16.5	-58.7	0.77	0.31	-80.7	-106.8	-127.8	-147.4	6.0	-102.62
3.00	31.86	2058.9	2053.6	2050.0	-1.22	-1.27	-1.76	26.88	-20.2	-15.3	-63.0	0.67	0.53	-82.0	-106.8	-128.0	-148.1	8.5	-106.65
4.00	31.17	2090.9	2085.3	2081.4	-1.18	-1.20	-1.59	26.80	-18.1	-15.8	-67.5	0.55	0.47	-80.5	-107.1	-128.2	-147.9	10.0	-107.97
4.50	30.67	2106.6	2100.9	2096.9	-1.17	-1.18	-1.54	26.77	-17.5	-16.8	-55.3	0.47	0.22	-81.0	-107.2	-128.5	-147.9	20.8	-115.17
5.00	30.19	2122.1	2116.3	2112.1	-1.16	-1.11	-1.48	26.76	-17.5	-18.2	-53.0	0.40	0.32	-81.9	-107.4	-128.7	-148.1	35.5	-119.74
5.40	29.63	2134.3	2128.3	2124.1	-1.10	-1.05	-1.45	26.74	-17.0	-19.3	-55.0	0.35	0.46	-80.9	-107.6	-129.0	-148.7	60.7	-123.65
6.00	28.83	2152.2	2146.1	2141.9	-0.93	-0.88	-1.34	26.74	-16.8	-21.0	-63.6	0.29	0.57	-79.5	-107.9	-129.3	-149.0	86.7	-128.05
6.50	28.36	2166.7	2160.5	2156.3	-0.78	-0.75	-1.16	26.75	-16.7	-22.4	-55.9	0.25	0.43	-81.4	-108.1	-129.9	-149.8	100.0	-129.11
7.00	27.97	2181.0	2174.7	2170.4	-0.65	-0.61	-0.94	26.75	-16.7	-23.8	-46.5	0.20	0.26	-79.9	-107.7	-129.8	-150.1	148.1	-132.08
7.50	27.55	2195.1	2188.7	2184.3	-0.52	-0.48	-0.78	26.75	-16.6	-25.1	-43.9	0.16	0.41	-80.6	-108.5	-129.9	-149.8	177.0	-133.83
8.00	26.96	2209.0	2202.5	2198.0	-0.35	-0.29	-0.62	26.76	-16.4	-26.6	-44.4	0.13	0.59	-81.3	-108.8	-130.3	-151.0	211.6	-134.70
8.50	26.40	2222.6	2215.9	2211.5	-0.19	-0.13	-0.47	26.76	-16.4	-27.8	-45.6	0.09	0.58	-82.0	-109.1	-130.5	-150.2	302.4	-137.05
9.00	25.95	2235.9	2229.1	2224.7	-0.05	0.02	-0.33	26.78	-16.5	-29.4	-46.2	0.06	0.53	-81.9	-109.6	-130.8	-151.3	361.5	-138.77
9.50	25.50	2248.9	2242.1	2237.7	0.06	0.17	-0.20	26.79	-16.1	-30.8	-47.7	0.03	0.31	-82.7	-109.8	-131.1	-150.7	507.5	-142.37
10.00	25.15	2261.8	2254.9	2250.5	0.26	0.33	-0.11	26.79	-16.2	-31.9	-48.6	0.00	0.14	-81.7	-109.8	-131.2	-150.7	606.7	-143.74
11.00	24.16	2286.9	2279.8	2275.4	0.54	0.60	0.26	26.80	-16.1	-34.4	-48.0	0.05	0.53	-82.3	-110.0	-131.3	-150.6	851.6	-146.57
12.00	23.08	2310.9	2303.7	2299.4	0.74	0.82	0.56	26.82	-15.8	-36.5	-46.0	0.04	0.46	-83.3	-109.9	-131.5	-150.8	1000.0	-147.37

*at 25°C unless mentioned otherwise

