

Voltage Controlled Oscillator

MOS-2033-119+

5V Tuning for PLL IC's 1933 to 2033 MHz

Features

- low phase noise
- low pulling
- low pushing
- aqueous washable



CASE STYLE: CZ682

PRICE: \$20.45 ea. QTY (5-49)

Applications

- wireless communication
- WiMAX

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies,kHz Typ.				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @12 dB R (MHz)	PUSHING (MHz/V)	DC OPERATING POWER Vcc Current (volts) (mA)	
								VOLTAGE RANGE (V)	SENSI- TIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)								
	Min.	Max.	Typ.	1	10	100	1000	Min.	Max.	Typ.	Typ.	Typ.	Typ.	Typ.	Max.	Typ.	Typ.	Max.	
MOS-2033-119+	1933	2033	+3	-78	-103	-124	-144	0.4	5	42-47	20	200	-90	-23	-13	0.2	0.6	5	37

Pin Connections

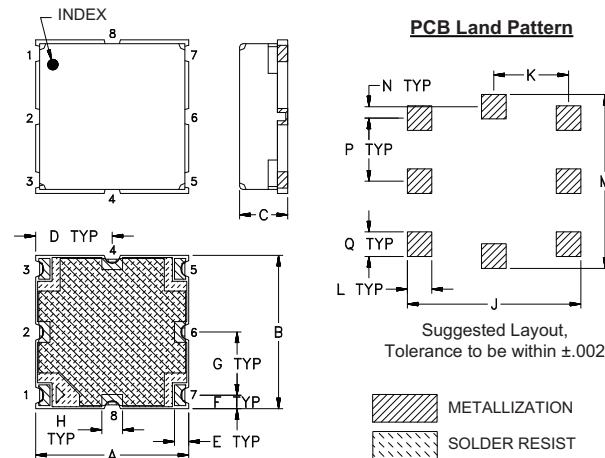
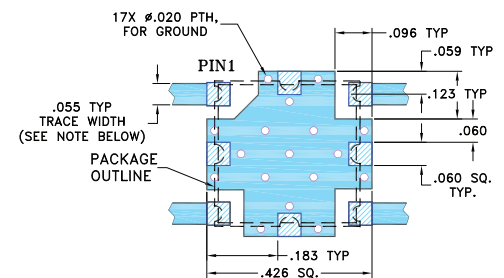
RF OUT	5
VCC	3
V-TUNE	1
GROUND	2,4,6,7,8

Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	5.5V
Absolute Max. Tuning Voltage (Vtune)	6.5V
All specifications	50 ohm system

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

Demo Board MCL P/N: TB-128
Suggested PCB Layout (PL-023)

- NOTE: 1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS 0.030 ± 0.002 ; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	wt.
.375	.375	.131	.188	.035	.033	.154	.050	.425	.183	.060	.425	.028	.154	.060	grams
9.52	9.52	3.33	4.77	0.89	0.84	3.91	1.27	10.80	4.65	1.52	10.80	0.71	3.91	1.52	.60

Performance Data & Curves*

MOS-2033-119+

V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 1983 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	46.73	1881.2	1870.2	1861.2	3.38	3.76	3.56	31.29	-19.6	-38.4	-56.5	0.13	0.37	-77.4	-100.1	-120.8	-140.6	1.0	-79.23
0.20	43.04	1890.3	1879.6	1871.0	3.19	3.64	3.44	31.35	-20.7	-39.5	-53.7	0.05	0.32	-79.0	-101.0	-121.1	-141.2	2.2	-86.24
0.40	41.38	1899.0	1888.2	1879.5	3.03	3.55	3.38	31.40	-21.4	-40.2	-53.0	0.19	0.34	-76.8	-102.0	-121.8	-142.2	4.0	-93.51
0.60	40.89	1907.6	1896.5	1887.6	2.92	3.47	3.32	31.44	-21.8	-40.0	-53.0	0.29	0.35	-77.5	-101.4	-122.3	-142.3	7.1	-99.70
1.00	39.90	1924.0	1912.7	1903.5	2.78	3.34	3.20	31.52	-22.1	-38.8	-52.2	0.45	0.27	-80.5	-101.6	-122.7	-142.5	8.7	-102.03
1.20	39.92	1932.1	1920.7	1911.4	2.71	3.29	3.16	31.57	-22.2	-38.8	-51.1	0.50	0.25	-78.4	-102.5	-122.9	-142.9	10.0	-102.58
1.60	42.22	1949.2	1936.8	1927.1	2.60	3.18	3.08	31.63	-22.5	-39.5	-50.2	0.60	0.22	-79.0	-102.2	-123.3	-142.5	23.1	-110.93
2.00	42.28	1966.1	1953.7	1943.4	2.60	3.12	2.98	31.73	-23.3	-40.6	-49.2	0.64	0.12	-79.9	-102.9	-123.7	-144.4	49.9	-117.44
2.40	43.63	1983.6	1970.8	1960.2	2.53	3.11	2.95	31.82	-23.1	-38.9	-47.4	0.64	0.05	-77.9	-102.8	-123.8	-144.1	72.5	-120.58
2.80	45.42	2001.9	1988.5	1977.4	2.49	3.04	2.92	31.88	-23.1	-38.5	-47.4	0.65	0.24	-79.8	-102.5	-123.8	-143.6	86.7	-122.41
3.00	45.57	2011.1	1997.6	1986.3	2.45	3.02	2.89	31.92	-23.2	-38.6	-46.6	0.64	0.31	-79.3	-102.3	-123.8	-143.7	100.0	-123.88
3.40	47.32	2030.1	2015.9	2004.2	2.42	2.97	2.84	31.98	-23.4	-38.6	-44.5	0.53	0.35	-75.1	-102.7	-123.9	-143.4	126.1	-125.70
3.60	46.46	2039.5	2025.4	2013.3	2.40	2.94	2.80	32.02	-23.4	-38.9	-43.5	0.45	0.31	-75.3	-102.4	-123.4	-143.4	223.3	-130.84
3.80	46.43	2048.9	2034.7	2022.5	2.37	2.92	2.77	32.06	-23.2	-37.6	-43.9	0.36	0.33	-74.5	-101.7	-123.4	-143.0	266.9	-133.99
4.00	46.08	2058.3	2044.0	2031.7	2.33	2.89	2.73	32.09	-23.2	-36.8	-43.0	0.26	0.32	-73.5	-101.8	-123.0	-142.7	388.3	-135.23
4.20	46.12	2067.8	2053.2	2040.7	2.30	2.85	2.69	32.11	-23.1	-36.1	-42.3	0.17	0.27	-74.6	-101.0	-122.6	-142.8	472.5	-137.14
4.40	46.29	2077.2	2062.4	2049.7	2.29	2.82	2.67	32.12	-22.8	-35.6	-42.3	0.08	0.22	-75.1	-101.2	-122.3	-142.4	564.9	-138.77
4.60	45.52	2086.4	2071.7	2058.7	2.27	2.80	2.62	32.14	-22.9	-35.7	-41.4	0.00	0.20	-76.9	-100.7	-122.3	-142.3	687.4	-140.29
4.80	44.91	2095.8	2080.8	2067.7	2.26	2.78	2.59	32.16	-23.2	-36.0	-41.8	0.15	0.16	-75.5	-101.5	-123.2	-141.8	821.7	-141.98
5.00	45.00	2104.9	2089.8	2076.5	2.24	2.75	2.55	32.16	-23.4	-35.5	-40.7	0.24	0.10	-74.8	-101.2	-123.2	-142.0	1000.0	-143.71

*at 25°C unless mentioned otherwise

