

# Voltage Controlled Oscillator

## ZX95-5580+

Frequency Doubling 5440 to 5580 MHz

### Features

- frequency based on multiplication of carrier frequency
- linear tuning characteristics
- low phase noise
- low pushing & pulling
- 5V tuning voltage range
- protected by US patent 6,790,049



CASE STYLE: GB956

### Applications

- r & d
- lab
- instrumentation
- wireless communications
- point-to-point radio

| Connectors | Model        | Price        | Qty.  |
|------------|--------------|--------------|-------|
| SMA        | ZX95-5580-S+ | \$ 54.95 ea. | (1-9) |

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Electrical Specifications


| MODEL NO.  | FREQ. (MHz) |          | POWER OUTPUT (dBm) | PHASE NOISE dBc/Hz SSB at offset frequencies, kHz |      |      |      | TUNING |                   |                     |               |                                 | NON HARMONIC SPURIOUS (dBc) | HARMONICS (dBc) Max. |      |     | PULLING pk-pk @ 12 dB (MHz) | PUSHING (MHz/V) | DC OPERATING POWER |              |
|------------|-------------|----------|--------------------|---|------|------|------|--------|-------------------|---------------------|---------------|---------------------------------|-----------------------------|----------------------|------|-----|-----------------------------|-----------------|--------------------|--------------|
|            | F           | 2X(1/2F) |                    | Typ.  | 1    | 10   | 100  | 1000   | VOLTAGE RANGE (V) | SENSITIVITY (MHz/V) | PORT CAP (pF) | 3 dB MODULATION BANDWIDTH (MHz) |                             | F0.5                 | F1.5 | F2  |                             |                 | Vcc (volts)        | Current (mA) |
| ZX95-5580+ | Min.        | Max.     | Typ.               | -75   | -101 | -123 | -143 | 0.5    | 5                 | 68-72               | 15            | 180                             | -90                         | -16                  | -25  | -21 | 0.3                         | 0.8             | 5                  | 35           |

### Maximum Ratings

|                                      |                |
|--------------------------------------|----------------|
| Operating Temperature                | -55°C to 85°C  |
| Storage Temperature                  | -55°C to 100°C |
| Absolute Max. Supply Voltage (Vcc)   | 6V             |
| Absolute Max. Tuning Voltage (Vtune) | 7V             |
| All specifications                   | 50 ohm system  |

Permanent damage may occur if any of these limits are exceeded.

### Outline Drawing

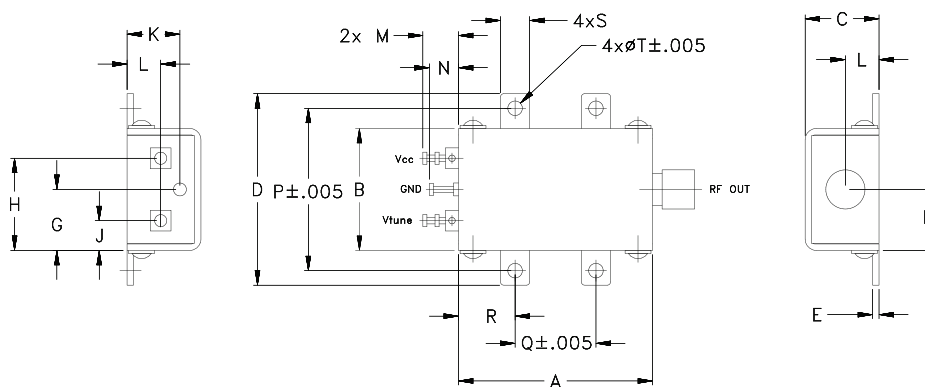

### Outline Dimensions (inch/mm)

| A     | B     | C     | D     | E    | F    | G    | H     | J    | K    | L    | M    | N    | P     | Q     | R    | S    | T    | wt.   |
|-------|-------|-------|-------|------|------|------|-------|------|------|------|------|------|-------|-------|------|------|------|-------|
| 1.20  | .75   | .46   | 1.18  | .04  | .38  | .38  | .57   | .18  | .33  | .21  | .22  | .18  | 1.00  | .50   | .35  | .18  | .106 | grams |
| 30.48 | 19.05 | 11.68 | 29.97 | 1.02 | 9.65 | 9.65 | 14.48 | 4.57 | 8.38 | 5.33 | 5.59 | 4.57 | 25.40 | 12.70 | 8.89 | 4.57 | 2.69 | 35.0  |



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

**Notes:** 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).







REV. OR  
M110878  
EDR-8245F2  
ZX95-5580+  
RAV  
120906  
Page 1 of 2

# Performance Data & Curves\*

# ZX95-5580+

| V TUNE | TUNE SENS (MHz/V) | FREQUENCY (MHz) |        |        | POWER OUTPUT (dBm) |       |       | Icc (mA) | HARMONICS (dBc) |       |       | FREQ. PUSH (MHz/V) | FREQ. PULL (MHz) | PHASE NOISE (dBc/Hz) at offsets |        |        |        | FREQ OFFSET (KHz) | PHASE NOISE at 5510 MHz (dBc/Hz) |
|--------|-------------------|-----------------|--------|--------|--------------------|-------|-------|----------|-----------------|-------|-------|--------------------|------------------|---------------------------------|--------|--------|--------|-------------------|----------------------------------|
|        |                   | -55°C           | +25°C  | +85°C  | -55°C              | +25°C | +85°C |          | F0.5            | F1.5  | F2    |                    |                  | 1kHz                            | 10kHz  | 100kHz | 1MHz   |                   |                                  |
| 0.00   | 72.13             | 5328.5          | 5308.2 | 5295.4 | 0.50               | -2.16 | -4.00 | 26.52    | -26.9           | -36.2 | -25.4 | 0.80               | 0.11             | -75.6                           | -102.4 | -123.2 | -142.9 | 1.0               | -74.25                           |
| 0.25   | 67.64             | 5345.7          | 5326.2 | 5314.0 | 0.67               | -1.76 | -4.12 | 26.61    | -26.9           | -34.5 | -26.1 | 0.93               | 0.46             | -76.9                           | -102.8 | -123.3 | -143.3 | 2.0               | -83.24                           |
| 0.50   | 65.82             | 5362.3          | 5343.1 | 5331.3 | 0.74               | -1.39 | -3.63 | 26.69    | -26.9           | -34.9 | -23.6 | 0.99               | 0.56             | -76.1                           | -102.7 | -123.6 | -143.4 | 3.5               | -90.37                           |
| 0.75   | 65.04             | 5378.6          | 5359.6 | 5347.7 | 0.50               | -1.25 | -3.18 | 26.77    | -26.9           | -34.1 | -24.9 | 1.03               | 0.41             | -76.3                           | -102.7 | -123.4 | -143.7 | 6.0               | -96.26                           |
| 1.00   | 65.60             | 5395.0          | 5375.9 | 5363.9 | 0.39               | -1.29 | -3.01 | 26.84    | -26.6           | -33.1 | -29.5 | 1.07               | 0.10             | -76.4                           | -102.7 | -124.4 | -143.6 | 8.5               | -99.64                           |
| 1.25   | 66.23             | 5411.4          | 5392.3 | 5380.1 | 0.67               | -1.63 | -3.20 | 26.90    | -26.0           | -34.3 | -27.3 | 1.11               | 0.28             | -76.2                           | -102.4 | -123.8 | -143.6 | 10.0              | -101.55                          |
| 1.50   | 66.88             | 5427.9          | 5408.8 | 5396.4 | 1.00               | -1.52 | -3.52 | 26.96    | -26.0           | -31.1 | -27.0 | 1.15               | 0.47             | -76.2                           | -102.3 | -123.5 | -143.4 | 20.8              | -108.87                          |
| 1.75   | 67.65             | 5444.7          | 5425.5 | 5413.0 | 0.96               | -1.16 | -3.44 | 27.03    | -26.2           | -33.5 | -29.4 | 1.17               | 0.46             | -76.1                           | -102.6 | -123.5 | -143.4 | 35.5              | -113.90                          |
| 2.00   | 68.92             | 5461.7          | 5442.5 | 5429.8 | 1.43               | -0.95 | -2.95 | 27.10    | -26.0           | -34.4 | -27.9 | 1.17               | 0.18             | -75.5                           | -102.2 | -123.3 | -143.8 | 60.7              | -117.84                          |
| 2.25   | 70.05             | 5479.2          | 5459.7 | 5446.8 | 1.12               | -0.76 | -2.56 | 27.16    | -25.9           | -33.8 | -26.9 | 1.16               | 0.14             | -75.4                           | -102.2 | -123.6 | -143.4 | 86.7              | -122.15                          |
| 2.50   | 71.27             | 5496.9          | 5477.2 | 5464.0 | 0.69               | -0.61 | -2.69 | 27.23    | -25.7           | -34.4 | -32.2 | 1.12               | 0.40             | -75.3                           | -102.0 | -123.5 | -143.2 | 100.0             | -123.13                          |
| 2.75   | 71.95             | 5514.9          | 5495.0 | 5481.6 | 0.90               | -0.91 | -2.50 | 27.29    | -24.9           | -34.5 | -30.6 | 1.04               | 0.44             | -74.4                           | -101.6 | -123.2 | -143.1 | 148.1             | -126.60                          |
| 3.00   | 71.84             | 5532.9          | 5513.0 | 5499.4 | 1.80               | -1.34 | -2.70 | 27.35    | -24.3           | -35.1 | -28.4 | 0.90               | 0.28             | -74.5                           | -101.4 | -123.0 | -142.9 | 177.0             | -128.31                          |
| 3.25   | 70.69             | 5550.8          | 5531.0 | 5517.3 | 2.09               | -0.64 | -2.93 | 27.42    | -25.0           | -35.4 | -31.2 | 0.68               | 0.06             | -74.3                           | -101.0 | -122.5 | -142.7 | 211.6             | -129.81                          |
| 3.50   | 69.48             | 5568.6          | 5548.6 | 5535.0 | 1.41               | 0.05  | -2.61 | 27.47    | -25.4           | -37.8 | -32.8 | 0.40               | 0.40             | -73.5                           | -100.6 | -122.3 | -142.4 | 302.4             | -132.79                          |
| 3.75   | 68.23             | 5586.1          | 5566.0 | 5552.4 | 1.47               | -0.08 | -1.82 | 27.52    | -25.0           | -35.2 | -31.5 | 0.10               | 0.45             | -73.3                           | -100.1 | -121.9 | -141.8 | 361.5             | -134.36                          |
| 4.00   | 65.77             | 5603.1          | 5583.1 | 5569.3 | 1.57               | -0.47 | -1.81 | 27.57    | -24.5           | -38.8 | -36.2 | 0.17               | 0.31             | -73.6                           | -99.7  | -121.1 | -141.4 | 507.5             | -137.44                          |
| 4.50   | 59.73             | 5634.9          | 5615.2 | 5601.7 | 2.07               | -0.21 | -2.26 | 27.66    | -24.2           | -35.6 | -32.2 | 0.52               | 0.27             | -72.7                           | -99.3  | -120.8 | -140.7 | 606.7             | -138.99                          |
| 4.75   | 56.62             | 5649.8          | 5630.1 | 5616.7 | 1.98               | -0.04 | -2.01 | 27.70    | -23.9           | -39.5 | -34.4 | 0.56               | 0.51             | -73.0                           | -99.2  | -120.8 | -140.5 | 851.6             | -141.77                          |
| 5.00   | 53.94             | 5664.0          | 5644.3 | 5631.0 | 1.86               | 0.23  | -1.78 | 27.72    | -23.8           | -38.7 | -36.9 | 0.51               | 0.54             | -72.5                           | -99.1  | -120.8 | -140.7 | 1000.0            | -143.08                          |

\*at 25°C unless mentioned otherwise

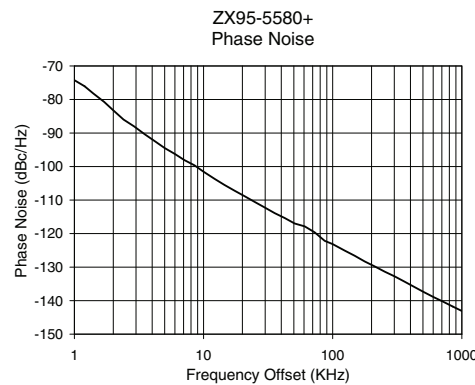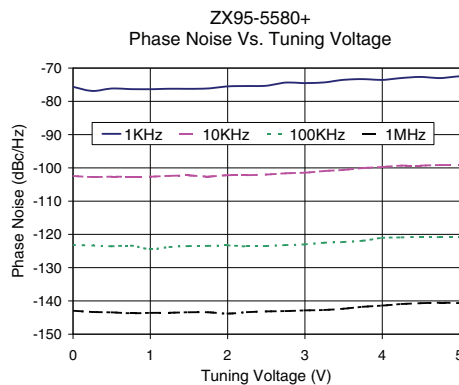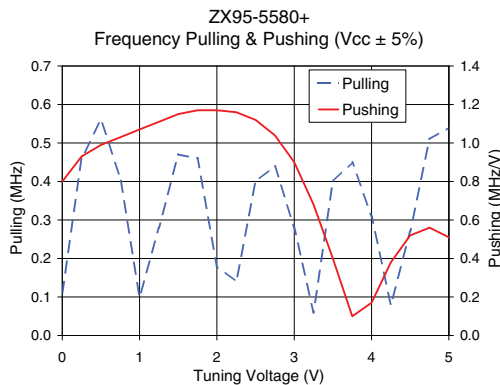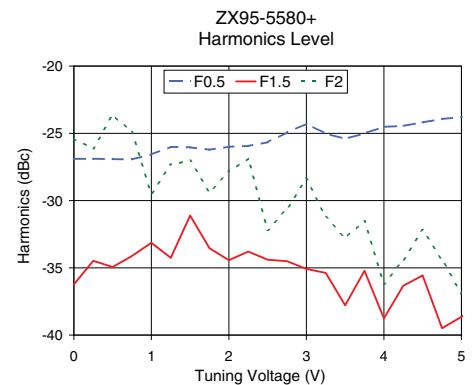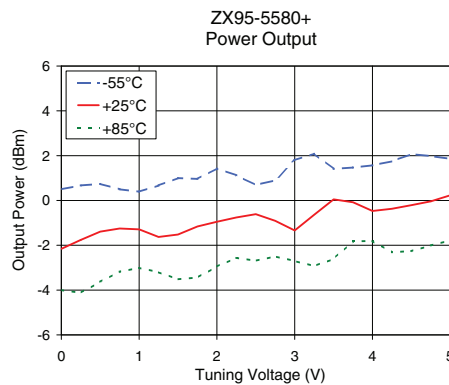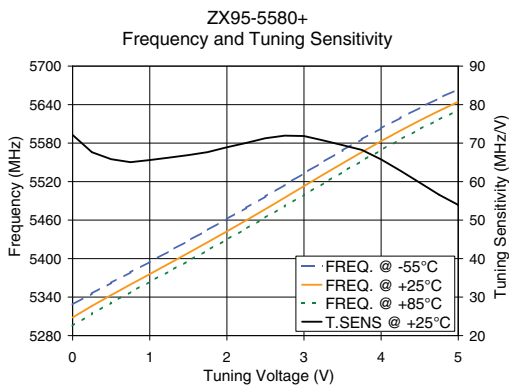

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).