


Plug-In Voltage Controlled Oscillator

POS-300P+ POS-300P

5V Tuning for PLL IC's 148 to 174 MHz



CASE STYLE: A06
PRICE: \$ 14.95 ea QTY (5-49)

Features

- 5V tuning voltage range
- low phase noise
- hermetically sealed

Applications

- PLL circuitry
- frequency synthesizers

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

FREQUENCY (MHz)		POWER OUTPUT (dBm)	TUNING VOLTAGE (V)		PHASE NOISE (dBc/Hz) SSB at offset frequencies: Typ.				PULLING pk-pk @ 12 dB (MHz)	PUSHING (MHz/V)	TUNING SENSITIVITY (MHz/V)	HARMONICS (dBc)		3 dB MODULATION BANDWIDTH (MHz)	DC OPERATING POWER	
Min.	Max.	Typ.	Min.	Max.	1 kHz	10 kHz	100 kHz	1 MHz	Typ.	Typ.	Typ.	Typ.	Max.	Typ.	Voltage (V)	Current (mA) Max.
148	174	10	0.5	5.0	-83	-105	-125	-145	1.8	0.3	10-14	-27	-20	0.1	12	20

Pin Connections


RF OUT	2
VCC	1
V-TUNE	8
GROUND	3,4,5,6,7
CASE GROUND	3,4,5,6,7

Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	+16V
Absolute Max. Tuning Voltage (Vtune)	+7V

all specifications: 50 ohm system
Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

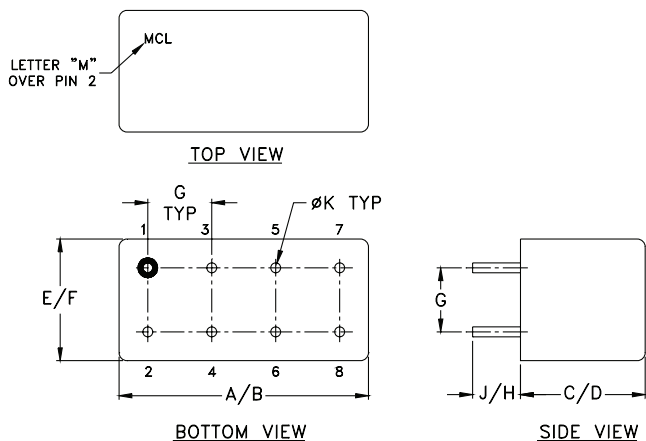

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	wt
.770	.800	.285	.310	.370	.400	.200	.20	.14	.031	grams
19.558	20.32	7.239	7.874	9.398	10.16	5.08	5.08	3.556	0.7874	5.2


Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp





Performance Data & Curves


POS-300P+ POS-300P

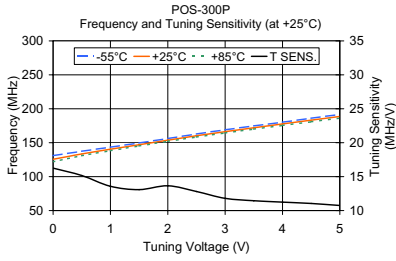

V TUNE	TUNING SENS. (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)		
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C
0.00	16.26	130.97	125.58	121.94	6.36	7.02	6.21
0.50	15.16	137.44	133.44	130.82	7.48	8.45	7.85
1.00	13.58	143.41	140.40	138.32	8.47	9.57	9.16
1.50	13.09	149.57	147.01	145.24	8.87	9.98	9.59
2.00	13.65	156.17	153.67	152.09	9.05	10.13	9.70
2.50	12.81	162.85	160.26	158.44	9.10	10.08	9.73
3.00	11.80	169.07	166.24	164.40	9.06	10.05	9.79
3.50	11.45	174.77	172.00	170.06	8.99	10.04	9.85
4.00	11.24	180.29	177.66	175.50	8.96	10.08	9.92
4.50	11.05	186.11	183.22	180.88	8.96	10.12	9.92
5.00	10.75	191.68	188.65	186.34	8.98	10.22	9.89

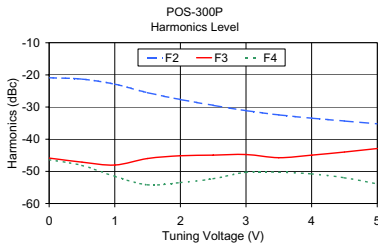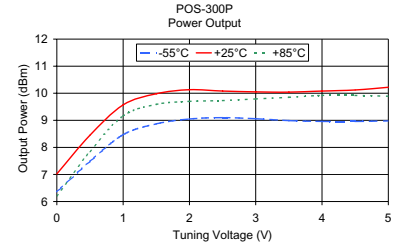

V TUNE	HARMONICS (dBc)			FREQ. PUSHING (MHz/V)
	F2	F3	F4	
0.00	-20.87	-45.87	-46.37	-0.32
0.50	-21.30	-47.14	-48.14	0.13
1.00	-22.87	-48.04	-51.54	0.45
1.50	-25.50	-46.00	-54.17	0.38
2.00	-27.65	-45.15	-53.48	0.32
2.50	-29.45	-44.95	-52.29	0.32
3.00	-31.10	-44.77	-50.27	0.26
3.50	-32.42	-45.76	-50.26	0.26
4.00	-33.45	-44.95	-50.79	0.19
4.50	-34.33	-43.99	-51.99	0.26
5.00	-35.22	-42.89	-53.89	0.19

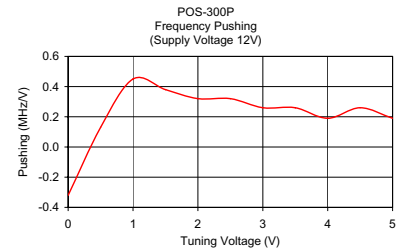

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp