

Ultra-Small Ceramic



2 Way-0°

50Ω

2825 to 3700 MHz

Operating Temperature -55°C to 100°C

Storage Temperature	-55°C to 100°C
---------------------	----------------

Power Input (as a splitter)	4W* max.
-----------------------------	----------

*Derate linearly to 1.3W at 100°C ambient, power input as combiner is limited by rating of external 100Ω Resistor.

Permanent damage may occur if any of these limits are exceeded.



SUM	PORT	2
-----	------	---

PORT 1	6
--------	---

PORT 1	3
PORT 2	4

GROUND	1.3.5
--------	-------

PORT 1-2	resistor external 100 OHMS
----------	----------------------------




Suggested Layout,
Tolerance to be within $\pm .002$

A	B	C	D	E	F
126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K	wt	
.039	.024	.042	.123	grams	
0.99	0.61	1.07	3.12	.020	

A	B	C	D	E	F
126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K	wt	
.039	.024	.042	.123	grams	
0.99	0.61	1.07	3.12	.020	

Demo Board MCL P/N: TB-252
Suggested PCB Layout (PL-129)

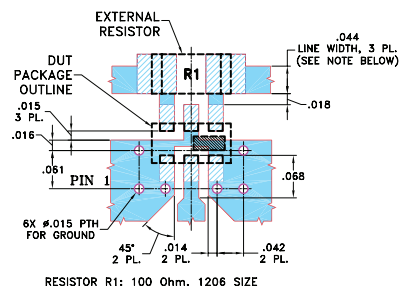

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" $\pm$ 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER

 PERFORMED AFTER EFFECT WITH MASK (GOLDEN MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK




- isolation resistor, external 100 ohms
- low insertion loss, 0.4 dB typ.
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 0.8 deg. typ.
- high isolation, 28 dB typ.
- excellent power handling, 4W as splitter
- small size, 0.12"X0.06"X0.035"
- ESD non-sensitive
- temperature stable LTCC technology
- wrap around terminations for excellent solderability
- low cost
- protected by US patent 6,967,544

- amateur radio
- defense
- wireless communication

FREQUENCY (MHz)	INSERTION LOSS (dB) ABOVE 3.0 dB		ISOLATION (dB)		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)		RETURN LOSS (dB)	
	Typ.	Max.	Typ.	Min.	Typ.	Max.	Typ.	Max.	INPUT Typ.	OUTPUT Typ.
2825-3700	0.4	1.3	22	13	1.0	4.0	0.1	0.3	18	20
3200-3500	0.4	1.0	28	18	0.8	4.0	0.1	0.3	20	23

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	Return Loss (dB)		
	S-1	S-2				S	1	2
2825.00	3.60	3.54	0.06	14.94	0.28	15.39	47.26	31.96
2900.00	3.58	3.52	0.05	15.70	0.22	16.46	41.52	34.99
3000.00	3.54	3.48	0.05	17.02	0.21	18.99	33.34	47.87
3100.00	3.51	3.46	0.05	18.47	0.17	21.86	29.16	39.50
3200.00	3.50	3.45	0.05	20.26	0.14	26.24	25.93	31.34
3300.00	3.50	3.46	0.04	22.71	0.14	30.10	23.20	26.54
3450.00	3.54	3.51	0.04	27.85	0.12	21.96	20.06	21.98
3500.00	3.57	3.53	0.04	29.97	0.13	20.04	19.24	20.75
3550.00	3.60	3.55	0.04	31.81	0.11	18.22	18.51	19.70
3575.00	3.62	3.57	0.05	32.20	0.09	17.56	18.24	19.31
3600.00	3.63	3.58	0.05	32.06	0.06	17.00	17.98	18.95
3625.00	3.65	3.60	0.05	31.43	0.04	16.42	17.72	18.61
3650.00	3.66	3.62	0.05	30.50	0.01	15.80	17.43	18.26
3675.00	3.68	3.64	0.04	29.47	0.02	15.18	17.13	17.88
3700.00	3.70	3.66	0.04	28.52	0.03	14.65	16.85	17.50

1. Total Loss = Insertion Loss + 3dB splitter loss.

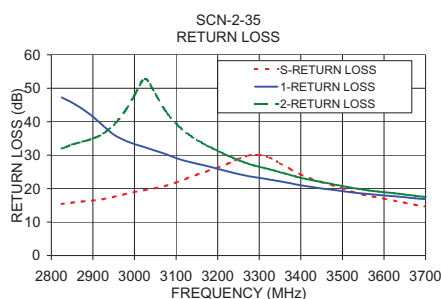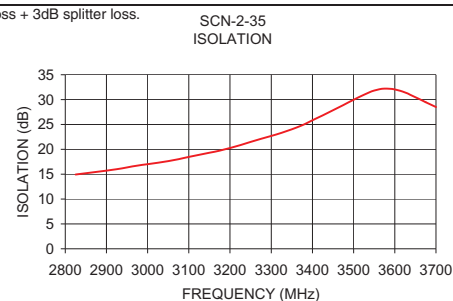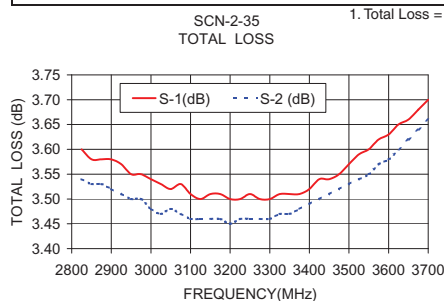SCN-2-35
ISOLATION

For detailed performance specs
& shopping online see web site

REV. D
M127604
SCN-2-35
ED-11378C/1
AD/TD/CP/AM
130306

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS