

Surface Mount, Micro-Miniature

Power Splitter/Combiner

2 Way-0° 75Ω

500 to 1500 MHz

SBTC-2-15-75X+



No Leads

CASE STYLE:AT1667

PRICE: \$3.49 ea. QTY (20)

\$2.69 ea. QTY (1000)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.125W max.


Pin Connections

SUM PORT	6
PORT 1	3
PORT 2	4
GROUND	1,2
NOT USED	5

Outline Drawing

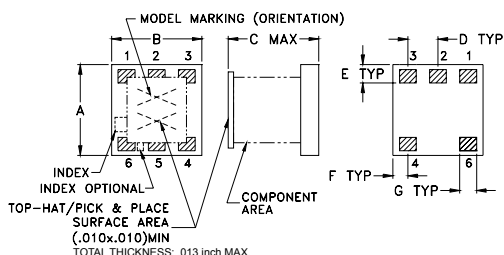

PCB Land Pattern




Outline Dimensions (inch mm)

A	B	C	D	E	F
.150	.150	.150	.050	.030	.025
3.81	3.81	3.81	1.27	0.76	0.64
G	H	J	K		wt
.028	.050	.160	.030		grams
0.71	1.27	4.06	0.76		0.10

Demo Board MCL P/N: TB-277

Suggested PCB Layout (PL-153)

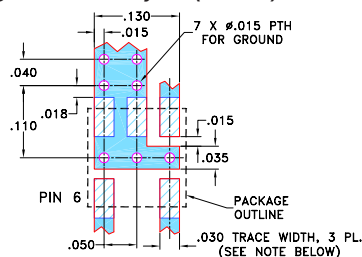

Features

- low insertion loss, 0.8 dB typ.
- excellent isolation 28 dB typ.
- very good phase unbalance, 1 deg. typ.
- small size, 0.166"x0.150"x0.155"
- temperature stable LTCC base
- small size
- low cost
- aqueous washable
- protected by US patent 6,963,255

Applications

- internet over satellite modems
- VSAT




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)	INSERTION LOSS (dB) ABOVE 3.0 dB	PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
f_L - f_U	Typ. Min.	Typ. Max.	Max.	Max.
500-1500	28 18	0.8 1.5	5	0.9
700-1500	28 20	0.8 1.5	4	0.7

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB) S-1	Total Loss ¹ (dB) S-2	Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
500.00	4.19	3.61	0.58	21.98	1.92	1.11	1.73	1.57
600.00	4.12	3.63	0.49	25.03	1.30	1.08	1.60	1.50
700.00	3.97	3.58	0.39	27.04	0.91	1.08	1.51	1.42
800.00	3.93	3.61	0.32	30.56	0.59	1.08	1.36	1.35
850.00	3.92	3.63	0.29	32.53	0.44	1.08	1.33	1.33
900.00	3.90	3.64	0.25	33.74	0.29	1.08	1.32	1.31
950.00	3.88	3.66	0.22	35.62	0.20	1.09	1.28	1.29
1000.00	3.86	3.68	0.18	39.45	0.15	1.10	1.22	1.27
1100.00	3.84	3.74	0.10	45.64	0.17	1.11	1.22	1.28
1200.00	3.85	3.81	0.04	43.71	0.19	1.14	1.14	1.24
1250.00	3.83	3.83	0.03	41.60	0.21	1.15	1.10	1.22
1300.00	3.81	3.86	0.05	41.15	0.19	1.17	1.10	1.23
1400.00	3.82	3.95	0.13	42.70	0.21	1.22	1.09	1.26
1450.00	3.83	4.00	0.17	42.33	0.24	1.25	1.11	1.27
1500.00	3.84	4.05	0.21	42.11	0.30	1.28	1.15	1.30

1. Total Loss = Insertion Loss + 3dB splitter loss.

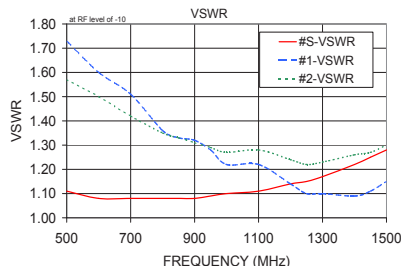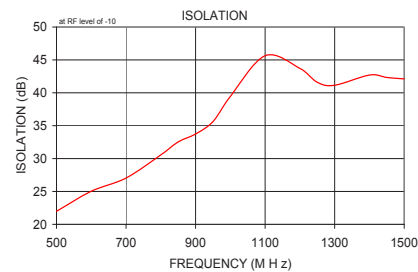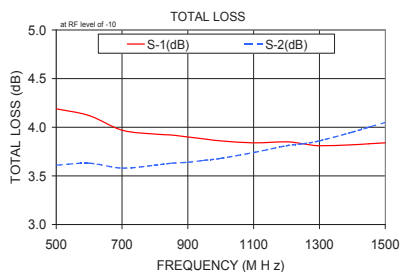

electrical schematic



Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine www.minicircuits.com Provides ACTUAL Data Instantly at [minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs & shopping online see web site

REV. OR
M136167
SBTC-2-15-75X+
ED-9230/2
WZ/TD/CP/AM
120416