

Surface Mount

Power Splitter/Combiner

SYPS-2-252+

2 Way-0° 50Ω 5 to 2500 MHz




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.05W max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

SUM PORT	8
PORT 1	4
PORT 2	5
GROUND	1,2,3,6,7


Outline Drawing

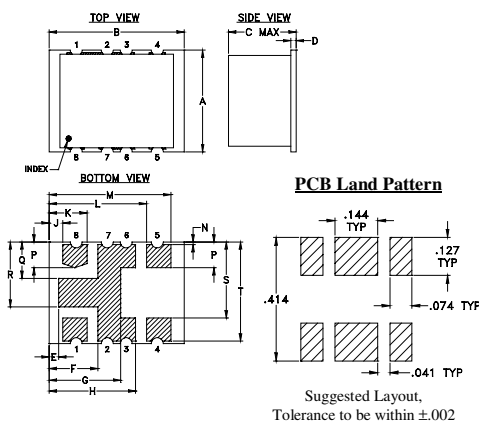

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K
.38	.50	.25	.020	.035	.180	.265	.320	.050	.140
9.65	12.70	6.35	0.51	0.89	4.57	6.73	8.13	1.27	3.56
L	M	N	P	Q	R	S	T	wt	
.360	.450	.010	.095	.135	.240	.280	.365	grams	
9.14	11.43	0.25	2.41	3.43	6.10	7.11	9.27	0.52	

Demo Board MCL P/N: TB-427+ Suggested PCB Layout (PL-274)

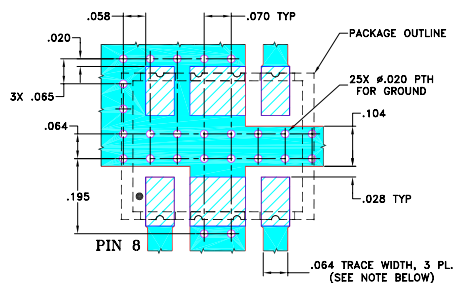

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, 5 to 2500 MHz. useable 0.5 to 2800 MHz
- low amplitude unbalance, 0.1 dB typ.
- low phase unbalance, 1 deg. typ.

Applications

- VHF/UHF
- communications systems
- receivers & transmitters
- instrumentation
- CATV
- cellular, GPS, PCS

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 3.0 dB				PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)			
	L	M	U	L	M	U	L	M	U	L	M	U		
	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Max.	Typ. Max.	Typ. Max.	Max.	Max.	Max.	Max.	Max.	Max.		
5-2500	24	15	18	15	17	14	0.4	0.6	0.7	1.3	2.4	0.1	0.3	0.5

L = low range [f_L to 10 f_L] M = mid range [10 f_L to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
5.00	3.34	3.33	0.01	22.24	0.00	1.07	1.38	1.38
60.00	3.37	3.36	0.01	28.39	0.05	1.08	1.27	1.27
100.00	3.40	3.39	0.01	28.04	0.06	1.10	1.27	1.27
200.00	3.45	3.43	0.01	26.77	0.12	1.14	1.26	1.27
400.00	3.53	3.51	0.03	23.93	0.25	1.22	1.27	1.28
600.00	3.63	3.60	0.04	21.49	0.42	1.31	1.28	1.29
800.00	3.74	3.70	0.04	19.78	0.56	1.38	1.30	1.30
1000.00	3.85	3.84	0.01	18.61	0.61	1.46	1.30	1.29
1200.00	3.97	3.99	0.02	17.78	0.61	1.53	1.31	1.29
1400.00	4.10	4.13	0.02	17.19	0.50	1.60	1.31	1.29
1800.00	4.40	4.37	0.03	16.65	0.09	1.73	1.34	1.30
2000.00	4.54	4.47	0.07	16.74	0.07	1.77	1.36	1.29
2200.00	4.68	4.56	0.13	17.06	0.17	1.77	1.37	1.28
2400.00	4.83	4.65	0.18	17.59	0.20	1.74	1.35	1.25
2500.00	4.92	4.70	0.22	17.88	0.19	1.71	1.33	1.23

1. Total Loss = Insertion Loss + 3dB splitter loss.

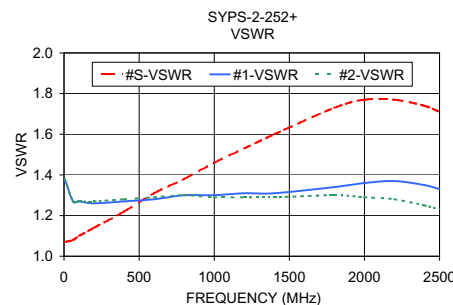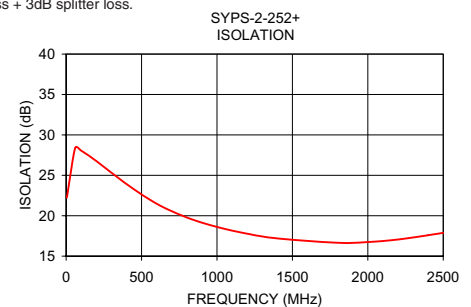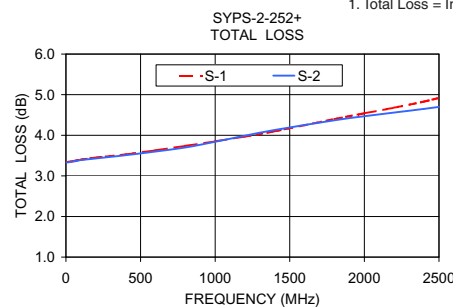

electrical schematic



Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine [minicircuits.com](http://www.minicircuits.com) Provides ACTUAL Data Instantly at [minicircuits.com](http://www.minicircuits.com)

IFIRF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs & shopping online see web site

REV. A
M127604
ED-12879/1
SYPS-2-252+
HY/QL/AM
100614