

Ultra-Small Ceramic Power Splitter/Combiner

QCN-12D+ QCN-12D

2 Way-90° 50Ω 800 to 1375 MHz



CASE STYLE: FV1206-1
PRICE: \$4.45 ea. QTY (20)

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost
Reel Size Devices/Reel
7" 20, 50, 100, 200, 500, 1000, 3000

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	15W* max.

* Derate linearly to 7W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

Pin Connections

SUM PORT	1
PORT 1 (0°)	4
PORT 2 (+90°)	6
GROUND	2,5
50 OHM TERM EXTERNAL	3

Features

- low insertion loss, 0.4 dB typ.
- wrap-around terminal for excellent solderability
- ultra small, 0.12"X0.06"X0.035"

Applications

- cellular
- satellite distribution
- GSM
- balanced amplifiers
- modulators

Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) Avg. of Coupled Outputs ABOVE 3 dB		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)		VSWR (:1)
	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.
800-1375									
800-1000	19	14	0.4	0.8	9	12	0.4	0.9	1.3
1000-1375	19	14	0.6	1.0	9	13	0.7	1.0	1.5




1. For applications requiring DC voltage to be applied to the RF ports. DC resistance to ground is 100 Mohms min.

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
800.00	3.30	3.72	0.42	17.70	82.30	1.26	1.31	1.31
810.00	3.33	3.68	0.35	17.77	82.27	1.26	1.31	1.31
830.00	3.35	3.60	0.24	17.90	82.14	1.25	1.31	1.31
870.00	3.46	3.53	0.07	18.29	82.10	1.24	1.30	1.31
900.00	3.52	3.43	0.08	18.58	82.03	1.22	1.29	1.31
930.00	3.54	3.38	0.16	18.85	81.82	1.21	1.29	1.30
960.00	3.63	3.36	0.27	19.22	81.93	1.20	1.28	1.30
990.00	3.63	3.28	0.35	19.52	81.65	1.19	1.28	1.31
1040.00	3.72	3.28	0.44	20.15	81.66	1.17	1.27	1.31
1100.00	3.73	3.26	0.46	20.91	81.43	1.15	1.27	1.32
1160.00	3.69	3.26	0.44	21.62	81.05	1.13	1.27	1.33
1220.00	3.68	3.35	0.33	22.25	81.02	1.12	1.28	1.36
1280.00	3.61	3.53	0.08	22.51	80.98	1.12	1.29	1.39
1340.00	3.45	3.72	0.27	22.12	80.57	1.14	1.31	1.44
1375.00	3.39	3.8	0.42	21.66	80.68	1.17	1.33	1.47

1. Total Loss = Insertion Loss + 3dB splitter loss.

Outline Drawing




Suggested Layout, Tolerance to be within ±.002




Outline Dimensions (inch/mm)

A	B	C	D	E	F
.126	.063	.035	.024	.022	.011
3.20	1.60	0.89	0.61	0.56	0.28
G	H	J	K	wt	
.039	.024	.042	.123	grams	
0.99	0.61	1.07	3.12		.020


Demo Board MCL P/N: TB-255+ Suggested PCB Layout (PL-131)

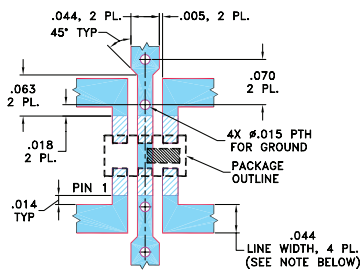

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

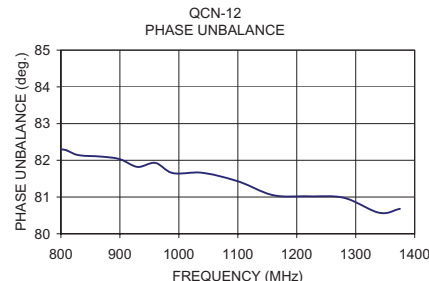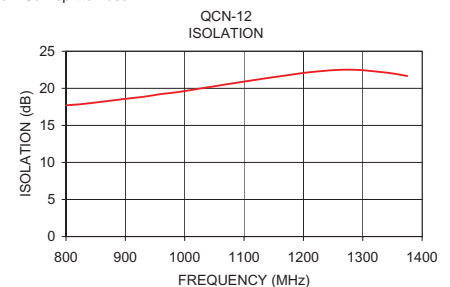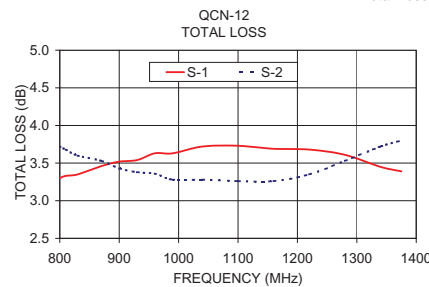

electrical schematic (Note 1)



For detailed performance specs & shopping online see web site



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. H
M127604
QCN-12D
ED-10849/2
AD/RS/CP/AM
130226