

# 2 Way-90° Power Splitter

QCS-332+

50Ω 1800 to 3300 MHz



CASE STYLE: GE0805C-1

## The Big Deal

- High Power handling (8W)
- Low Unbalance, 0.8 dB & 2 deg. typ.
- Industry leading combination of size/bandwidth

## Product Overview

Mini-Circuits new 90° Power Splitter, model: QCS-332+, offers an industry leading combination of operating bandwidth and size; supporting nearly an octave band in a miniature EIA-0805 form factor. The outstanding phase and amplitude unbalance make this component a versatile building block for use in a variety of systems and sub-system designs.

## Key Features

Feature	Advantages
Small Size	Offered in the EIA-0805 package size, the QCS-332+ offers an industry leading combination of size, bandwidth and frequency. The small footprint (2.0mm x1.25mm) allows for reduced parasitics in systems with improved performance and simplified layout.
Low Phase and Amplitude Unbalance	Supporting 2 deg. and 0.8 dB unbalance make this 90° hybrid applicable for use in higher level integrated components such as image reject mixers, single sideband modulators, phase shifters, variable attenuators, and balance amplifiers.
High Power Handling	Capable of operating up to 8W, the LTCC construction of the QCS-332+ makes this 90° hybrid a robust, rugged product that can be used effectively in either the transmit or receive paths.



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

For detailed performance specs  
& shopping online see web site

**Notes:** 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

# Power Splitter/Combiner

**QCS-332+**

2 Way-90° 50Ω 1800 to 3300 MHz



CASE STYLE: GE0805C-1  
PRICE: \$3.99 ea. QTY (20)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 2000

## Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	15W* max.

\*Derate linearly to 7W at 100°C ambient.  
Permanent damage may occur if any of these limits are exceeded.

## Pin Connections

SUM PORT	1
PORT 1 (0°)	4
PORT 2 (+90°)	6
GROUND	2,5
50 OHM TERM EXTERNAL	3

## Outline Drawing

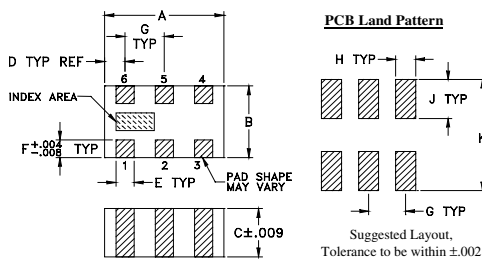

## Outline Dimensions (inch/mm)

A	B	C	D	E	F
.079	.049	.033	.014	.012	.012
2.01	1.24	0.84	0.36	0.30	0.30
G	H	J	K	wt	
.026	.014	.039	.110	grams	
0.66	0.36	1.00	2.80	.008	

## Features

- Low insertion loss, 0.6 dB typ.
- High isolation, 23 dB typ.
- Miniature size, 0.079"x0.049"x0.033"
- LTCC construction
- High power


## Applications

- Balanced amplifiers
- Modulators
- DCS, PCS, UMTS
- ISM
- WiMAX
- Phase Shifter
- Attenuator


## Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency		1800		3300	MHz
Insertion Loss (Avg. Of Coupled Outputs) above 3 dB	1800-2000		0.4	0.6	dB
	2000-2200		0.4	0.6	
	2200-2500		0.5	0.7	
	2500-2700		0.5	0.7	
	2900-3100		0.6	0.8	
Isolation	1800-2000	17	23	dB	
	2000-2200	18	25		
	2200-2500	18	25		
	2500-2700	18	25		
	2900-3100	18	25		
Phase Unbalance	1800-2000		2.0	5.0	Degree
	2000-2200		2.0	5.0	
	2200-2500		2.0	5.0	
	2500-2700		2.0	5.0	
	2900-3100		2.0	5.0	
Amplitude Unbalance	1800-2000		1.0	1.3	dB
	2000-2200		0.5	0.7	
	2200-2500		0.5	0.8	
	2500-2700		0.5	1.0	
	2900-3100		0.5	0.7	
VSWR	1800-3300		1.2		:1

## Electrical Schematic

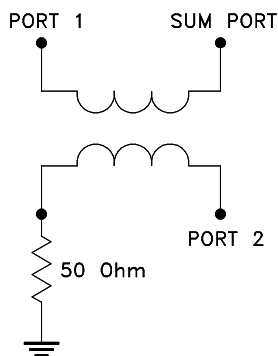

## Demo Board MCL P/N: TB-489-332+ Suggested PCB Layout (PL-304)

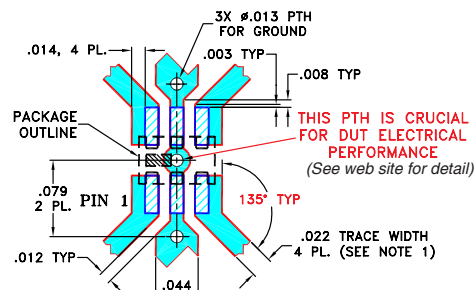

- NOTES:
1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
  - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)




For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

## Typical Performance Data

Frequency (MHz)	Total Loss <sup>1</sup> (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
1800.00	3.99	2.96	1.03	23.40	88.35	1.31	1.05	1.30
1950.00	3.74	3.14	0.60	24.85	88.39	1.27	1.07	1.25
2000.00	3.67	3.20	0.47	25.37	88.40	1.26	1.08	1.23
2100.00	3.55	3.30	0.25	26.50	88.35	1.23	1.10	1.21
2200.00	3.45	3.39	0.06	27.62	88.29	1.21	1.11	1.18
2300.00	3.38	3.46	0.08	28.54	88.18	1.18	1.13	1.16
2400.00	3.33	3.52	0.19	29.07	88.08	1.15	1.15	1.15
2450.00	3.32	3.55	0.23	28.97	88.04	1.14	1.17	1.14
2500.00	3.30	3.56	0.26	29.08	87.98	1.13	1.17	1.13
2600.00	3.30	3.59	0.29	28.38	87.90	1.10	1.19	1.12
2700.00	3.31	3.60	0.29	27.51	87.87	1.09	1.21	1.11
2800.00	3.36	3.59	0.24	26.62	87.90	1.08	1.23	1.10
2900.00	3.42	3.56	0.15	25.76	88.01	1.08	1.25	1.10
3000.00	3.50	3.51	0.01	25.02	88.22	1.09	1.26	1.10
3300.00	3.90	3.24	0.65	23.60	88.99	1.15	1.26	1.14

1. Total Loss = Insertion Loss + 3dB splitter loss.

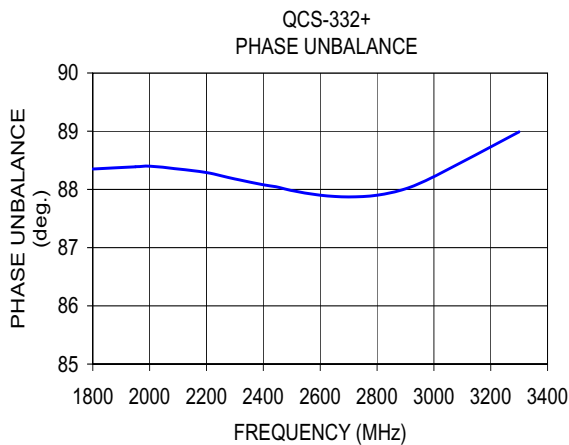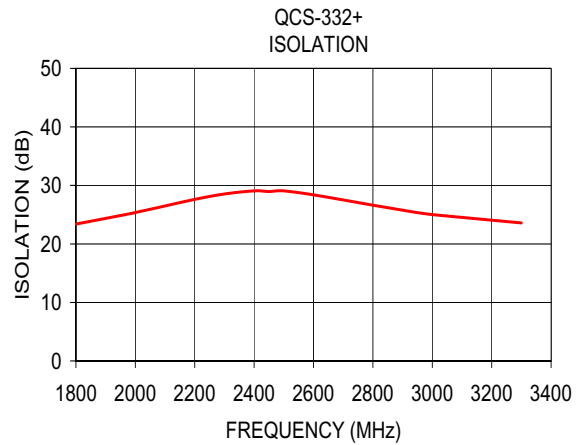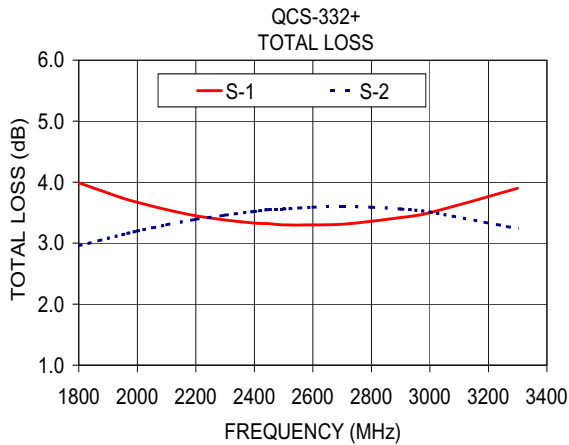

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).