


Surface Mount Power Splitter/Combiner

2 Way-90° 50Ω 55 to 85 MHz

SCPQ-85C+
SCPQ-85C




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

SUM PORT	1
PORT 1 (+90°)	2
PORT 2 (0°)	6
GROUND	3,4,7,8
50 OHM TERM EXTERNAL	5


Outline Drawing

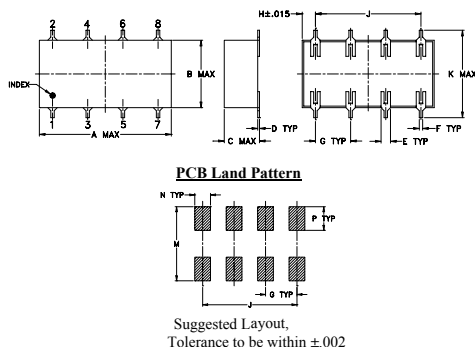

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.75	.38	.20	.010	.050	.020	.200
19.05	9.65	5.08	0.25	1.27	0.51	5.08
H	J	K	M	N	P	wt
.075	.600	.450	.470	.100	.150	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.6

Demo Board MCL P/N: TB-51 Suggested PCB Layout (PL-062)

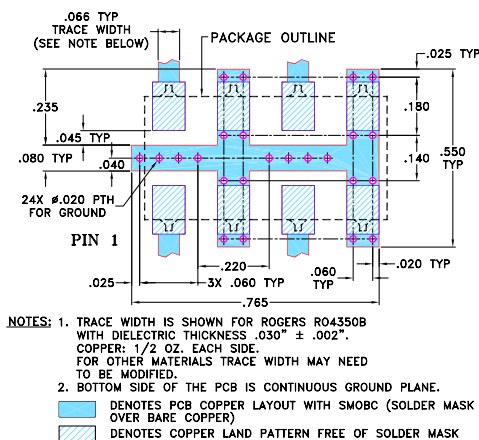

Features

- low insertion loss, 0.3 dB typ.
- high isolation, 30 dB typ.

Applications

- VHF
- modulators
- balanced amplifiers
- signal processing




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)	INSERTION LOSS (dB) Avg. of Coupled Outputs ABOVE 3 dB	PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
f_L - f_U	Typ. Min.	Typ. Max.	Max.	Max.
55-85	30 20	0.3 0.6	3	0.6


Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
55.00	3.38	2.97	0.41	29.89	89.46	1.04	1.03	1.04
57.00	3.31	3.05	0.26	29.91	89.52	1.04	1.03	1.04
60.00	3.23	3.15	0.08	29.96	89.62	1.04	1.03	1.05
62.00	3.19	3.20	0.01	30.00	89.70	1.04	1.04	1.05
64.00	3.16	3.25	0.09	30.06	89.78	1.05	1.04	1.05
66.00	3.14	3.29	0.15	30.09	89.87	1.05	1.04	1.06
68.00	3.14	3.32	0.18	30.15	89.97	1.05	1.04	1.06
70.00	3.14	3.35	0.21	30.17	90.09	1.06	1.05	1.06
72.00	3.15	3.36	0.21	30.23	90.22	1.06	1.05	1.07
74.00	3.18	3.36	0.18	30.25	90.37	1.07	1.05	1.07
76.00	3.21	3.36	0.14	30.25	90.54	1.07	1.06	1.07
78.00	3.26	3.34	0.08	30.28	90.74	1.08	1.06	1.08
81.00	3.36	3.31	0.05	30.32	91.06	1.09	1.07	1.08
83.00	3.45	3.27	0.18	30.32	91.33	1.10	1.07	1.09
85.00	3.55	3.22	0.32	30.34	91.61	1.10	1.08	1.09

1. Total Loss = Insertion Loss + 3dB splitter loss.

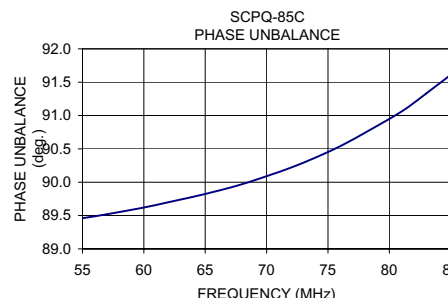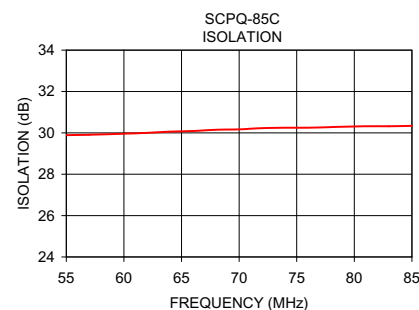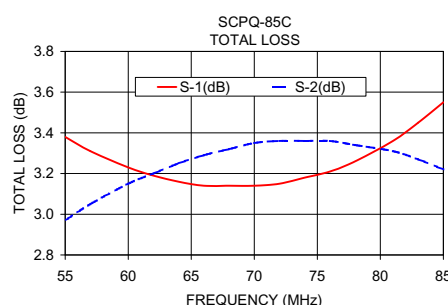

electrical schematic



For detailed performance specs & shopping online see web site

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M127604
SCPQ-85C
HY/TD/CP/AM
100623