

Surface Mount Power Splitter/Combiner

2 Way-180° 75Ω 5 to 1000 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1.0W max.
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

SUM PORT	6
PORT 1 (180°)	1
PORT 2 (0°)	3
GROUND	4
EXT. INDUCTOR SERIES 3-6nH	3
EXT. CAPACITOR 0.8pF	3 TO GND
EXT. CAPACITOR 3.6pF	5 TO GND
EXT. RESISTOR 30.1Ω	5 TO GND
EXT. RESISTOR SERIES 4.99Ω	1
GROUND OR NOT USE	2

Outline Drawing

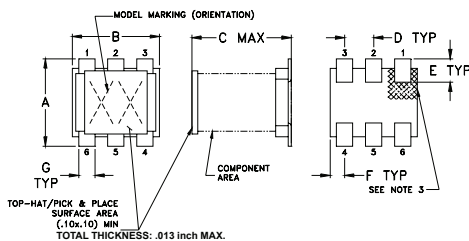


PCB Land Pattern



Outline Dimensions (inch)

A	B	C	D	E	F
.160	.150	.160	.030	.040	.025
4.06	3.81	4.06	0.76	1.02	0.64
G	H	J	K		wt
.028	.065	.190	.050		grams
0.71	1.65	4.83	1.27		0.15

Demo Board MCL P/N: TB-580+ Suggested PCB Layout (PL-342)



NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030 ± .002; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED. 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE. 3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER). 4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Features

- wide band frequency 5-1000 MHz.
- low insertion, 1.1 dB typ.
- excellent amplitude unbalance, 0.3 dB typ.
- very good phase unbalance, 2.7 deg. typ.
- external resistor inductor & capacitor required
- aqueous washable
- leads for excellent solderability
- low cost


Applications

- CATV
- cellular
- UHV/VHV

Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		5		1000	MHz
Insertion Loss Above 3.0 dB	5-50	—	1.1	1.7	dB
	50-500	—	1.2	1.6	
	500-1000	—	1.5	2.1	
Isolation	5-50	20	29	—	dB
	50-500	20	28	—	
	500-1000	20	26	—	
Phase Unbalance	5-50	—	0.6	3	Degree
	50-500	—	2.7	7	
	500-1000	—	2.8	9	
Amplitude Unbalance	5-50	—	0.4	0.6	dB
	50-500	—	0.3	0.5	
	500-1000	—	0.8	1.2	
VSWR (Port S)	5-50	—	1.27	1.5	:1
	50-500	—	1.15	1.3	
	500-1000	—	1.38	1.6	
VSWR (Port 1-2)	5-50	—	1.23	1.5	:1
	50-500	—	1.24	1.4	
	500-1000	—	1.58	1.8	

Application Circuit

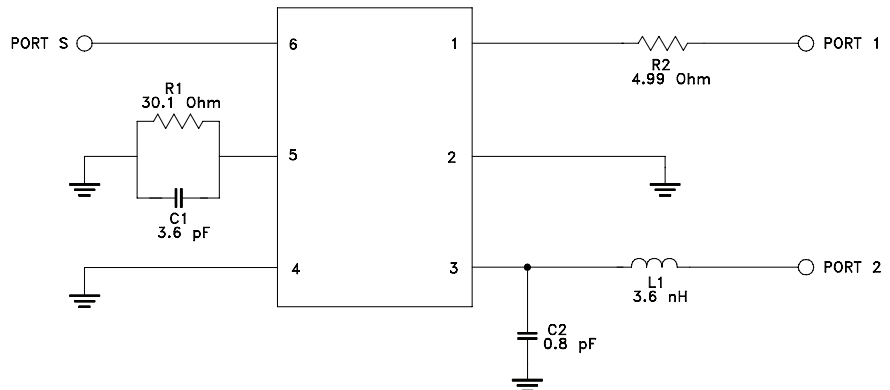

SEQ.	Description
CAP C1	S-SER 3.6±.1 pF; 0603 SIZE
CAP C2	HIQ 0.8 ±1 pf; 0603 SIZE
IND L1	3.6±.1 NH; 0402 SIZE
RES R1	.1W 30.1 OHM 1% 0603 SIZE
RES R2	.1W 4.99 OHM 1% 0603 SIZE

SEQ.	Suggested Supplier Part #
C1	AVX. 0603 1U3R6 * AT2A
C2	AVX. 0603 1U0R8 * AT2A
L1	Murat LQP15MN3N6B00
R1	KOA RK73HJTTD30R1F
R2	KOA RK73HJTTD4R99F

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.



CASE STYLE: DB1627

PRICE: \$5.95 ea. QTY. (20)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

For detailed performance specs
& shopping online see web site

REV. OR
M132985
SBTCJ-13-75+
ED-14073-1
JC/CP/AM
111207

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
5.00	4.26	3.92	0.34	30.05	179.61	1.23	1.15	1.19
10.00	4.12	3.82	0.30	29.41	179.60	1.15	1.09	1.13
50.00	4.10	3.85	0.25	28.70	179.99	1.11	1.02	1.09
100.00	4.13	3.89	0.24	28.87	179.77	1.10	1.03	1.08
200.00	4.17	3.94	0.23	28.74	179.39	1.10	1.07	1.06
300.00	4.19	3.99	0.21	28.22	179.06	1.11	1.11	1.04
400.00	4.22	4.04	0.17	27.94	178.93	1.11	1.16	1.06
500.00	4.23	4.12	0.10	27.96	178.85	1.11	1.19	1.09
550.00	4.23	4.18	0.05	28.20	178.94	1.13	1.22	1.10
600.00	4.22	4.21	0.01	28.59	179.11	1.15	1.24	1.11
700.00	4.20	4.32	0.12	29.79	179.42	1.22	1.30	1.14
750.00	4.16	4.36	0.20	30.62	179.59	1.25	1.32	1.16
800.00	4.15	4.40	0.26	31.22	179.85	1.28	1.36	1.17
900.00	4.10	4.54	0.44	30.64	179.53	1.31	1.44	1.21
1000.00	4.10	4.72	0.61	27.70	178.60	1.29	1.55	1.27

1. Total Loss = Insertion Loss + 3dB splitter loss.

