

Surface Mount Power Splitter/Combiner

4 Way-0° 50Ω 1710 to 1990 MHz

BP4P+



CASE STYLE: XX211
PRICE: \$1.49 ea. QTY. (20)

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-65°C to 150°C
Power Input (as a splitter)	1.5W max.
Internal Dissipation	0.375W max.

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

SUM PORT	2
PORT 1	1
PORT 2	8
PORT 3	5
PORT 4	4
GROUND	3,6,7


Outline Drawing

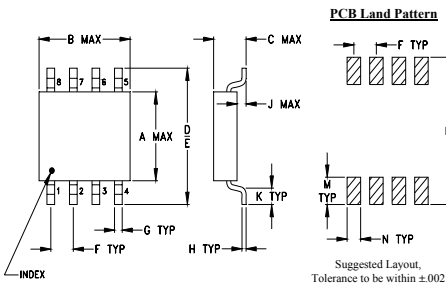

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.163	.210	.077	.250	.220	.050	.017
4.14	5.33	1.96	6.35	5.59	1.27	0.43
H	J	K	M	N	P	wt
.009	.025	.030	.050	.030	.270	grams
0.23	0.64	0.76	1.27	0.76	6.86	0.10

Demo Board MCL P/N: TB-231 Suggested PCB Layout (PL-113)

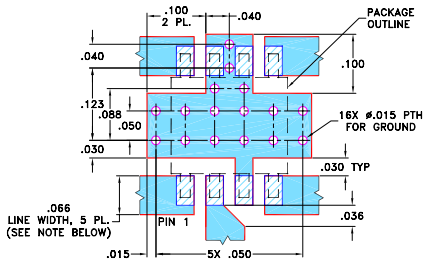

Features

- low insertion loss, 0.8 dB typ.
- excellent output VSWR, 1.25:1 typ.
- aqueous washable
- excellent power handling, 1.5W

Applications

- PCS/DCS
- GSM
- WCDMA

Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 6 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE Δ (dB)	VSWR (:1) Typ.	
	Typ.	Min.	Typ.	Max.			Ports S	Ports 1,2,3,4
f_L - f_U					Max.	Max.		
1710-1990	23	19*	0.8	1.3	15	0.5	1.2	1.25




*18 dB min. above 1900 MHz.

Δ Measurements relative to port 2.

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR				
	S-1	S-2	S-3	S-4		1-2	2-3	3-4		S	1	2	3	4
1710.00	6.33	6.64	6.82	6.82	0.50	28.02	31.20	33.25	6.48	1.14	1.22	1.28	1.24	1.29
1720.00	6.32	6.63	6.80	6.81	0.49	27.88	31.33	32.37	6.67	1.12	1.22	1.28	1.24	1.29
1740.00	6.32	6.61	6.78	6.80	0.48	27.54	31.32	30.86	7.05	1.09	1.21	1.27	1.23	1.28
1760.00	6.32	6.59	6.77	6.78	0.46	27.16	31.01	29.59	7.43	1.06	1.21	1.27	1.22	1.27
1780.00	6.33	6.57	6.75	6.77	0.45	26.75	30.48	28.51	7.82	1.05	1.20	1.26	1.22	1.26
1800.00	6.33	6.56	6.73	6.76	0.43	26.31	29.80	27.58	8.19	1.05	1.20	1.26	1.21	1.26
1820.00	6.34	6.55	6.72	6.76	0.42	25.85	29.03	26.75	8.56	1.07	1.19	1.25	1.21	1.25
1840.00	6.35	6.54	6.72	6.76	0.41	25.41	28.25	26.01	8.93	1.10	1.19	1.25	1.20	1.24
1860.00	6.36	6.54	6.71	6.76	0.39	25.00	27.52	25.36	9.30	1.13	1.19	1.24	1.20	1.24
1880.00	6.38	6.54	6.71	6.76	0.38	24.59	26.83	24.76	9.67	1.16	1.19	1.24	1.19	1.23
1900.00	6.39	6.53	6.70	6.76	0.36	24.20	26.14	24.21	10.04	1.19	1.18	1.24	1.19	1.23
1920.00	6.41	6.53	6.70	6.76	0.35	23.80	25.51	23.71	10.41	1.22	1.18	1.23	1.18	1.22
1940.00	6.43	6.53	6.70	6.77	0.34	23.43	24.93	23.25	10.77	1.25	1.17	1.23	1.18	1.22
1960.00	6.45	6.54	6.70	6.78	0.32	23.11	24.40	22.83	11.13	1.28	1.17	1.22	1.18	1.21
1990.00	6.49	6.54	6.71	6.79	0.30	22.65	23.66	22.24	11.70	1.33	1.17	1.22	1.17	1.21

1. Total Loss = Insertion Loss + 6dB splitter loss.

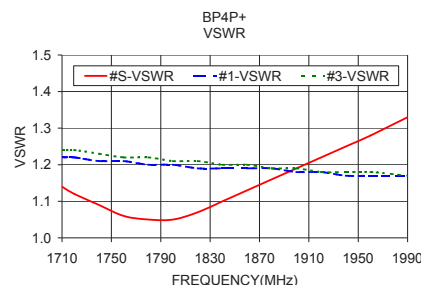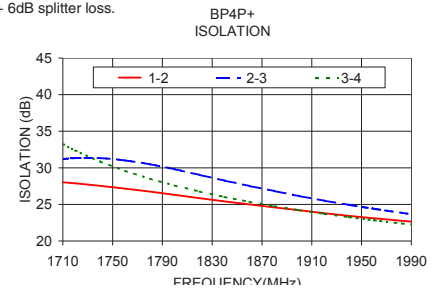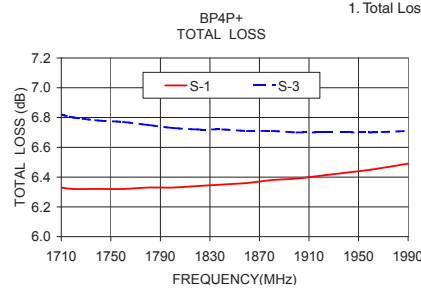

electrical schematic



ESD Rating

Human Body Model (HBM): Class 1A (250 v to <500 v) in accordance with ANSI/ESD STM 5.1 - 2001
Machine Model (MM): Class M1 (< 100 v) in accordance with ANSI/ESD STM 5.2 - 1999 (pass 50V)



For detailed performance specs & shipping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. B
M127604
ED-12348C/8+
RS/LC/CP/AM
BP4P+
120620