

Surface Mount

Power Splitter/Combiner

SEPS-4-272+

4 Way-0° 50Ω 690 to 2700 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	5W max.
Internal Dissipation	0.5W max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

SUM PORT	17
PORT 1	3
PORT 2	5
PORT 3	7
PORT 4	9
GROUND	all others


Outline Drawing

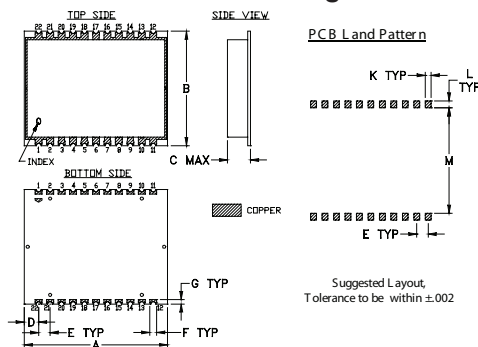

Outline Dimensions (inch mm)

A	B	C	D	E	F	G
1.250	1.000	.200	.125	.100	.060	.040
31.75	25.40	5.08	3.18	2.54	1.52	1.02
H	J	K	L	M		wt
--	--	.050	.060	.920		grams
--	--	1.27	1.52	23.37		4.4

Demo Board MCL P/N: TB-441+ Suggested PCB Layout (PL-273)

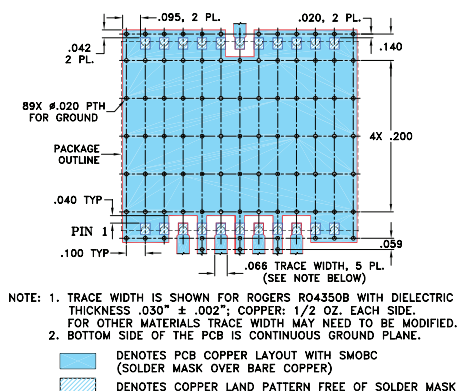

Features

- good isolation, 20 dB typ.
- good output matching, VSWR 1.1 typ.
- shielded case
- aqueous washable
- good coplanarity

Applications

- cellular
- CATV
- GPS
- ISM
- PCS
- wireless communication system

Electrical Specifications at 25°C


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		690		2700	MHz
Insertion Loss Above 6.0 dB	800-2200 690-2700		1.0 1.5	1.6 2.6	dB
Isolation	690-2700	15	20		dB
Phase Unbalance	690-2700		4	7	Degree
Amplitude Unbalance	690-2700		0.4	0.8	dB
VSWR (Port S)	690-2700		1.5		:1
VSWR (Port 1-4)	690-2700		1.2		:1

Typical Performance Data


Freq. (MHz)	Total Loss ¹ (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
600	6.80	7.23	7.19	6.77	0.46	17.21	17.55	17.13	0.63	2.31	1.29	1.41	1.42	1.30
700	6.56	6.99	6.94	6.54	0.45	19.79	19.35	19.70	0.49	1.96	1.23	1.33	1.33	1.25
1000	6.20	6.58	6.53	6.18	0.39	27.46	26.70	27.06	0.53	1.20	1.17	1.19	1.20	1.19
1100	6.21	6.56	6.52	6.18	0.38	25.76	29.38	25.39	0.67	1.10	1.16	1.16	1.17	1.18
1200	6.27	6.61	6.57	6.24	0.37	23.61	30.76	23.29	0.87	1.19	1.16	1.13	1.14	1.17
1400	6.48	6.79	6.76	6.44	0.35	20.89	29.04	20.61	1.34	1.47	1.14	1.08	1.09	1.15
1600	6.70	7.02	6.98	6.65	0.36	19.94	26.90	19.67	1.89	1.70	1.12	1.07	1.08	1.12
1800	6.81	7.17	7.13	6.77	0.40	20.51	25.91	20.21	2.36	1.77	1.11	1.14	1.15	1.12
2000	6.74	7.15	7.10	6.71	0.43	22.93	25.98	22.57	2.61	1.57	1.13	1.24	1.24	1.14
2100	6.67	7.09	7.05	6.65	0.44	25.05	26.20	24.59	2.67	1.41	1.14	1.29	1.29	1.15
2200	6.65	7.06	7.02	6.62	0.44	27.28	26.23	26.70	2.73	1.25	1.15	1.34	1.34	1.17
2300	6.70	7.09	7.04	6.67	0.42	27.31	25.62	26.86	2.79	1.20	1.19	1.40	1.40	1.20
2400	6.85	7.19	7.15	6.80	0.39	24.87	24.27	24.63	2.89	1.35	1.26	1.45	1.45	1.26
2600	7.44	7.67	7.61	7.37	0.30	20.70	20.83	20.54	3.55	1.95	1.50	1.50	1.51	1.48
2700	7.84	8.01	7.95	7.75	0.26	19.81	19.24	19.58	4.16	2.32	1.67	1.50	1.51	1.64

1. Total Loss = Insertion Loss + 6dB splitter theoretical loss.


SEPS-4-272+ TOTAL LOSS

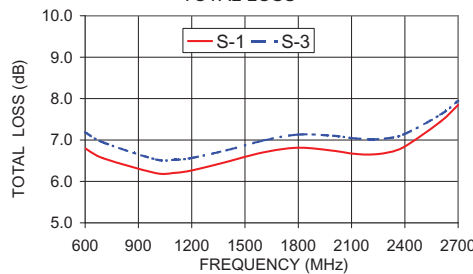

SEPS-4-272+ VSWR

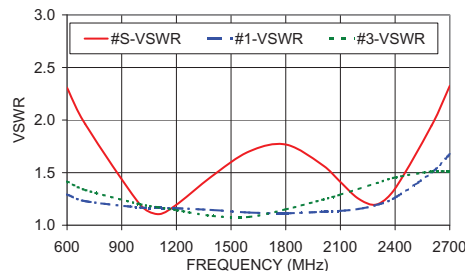

SEPS-4-272+ ISOLATION

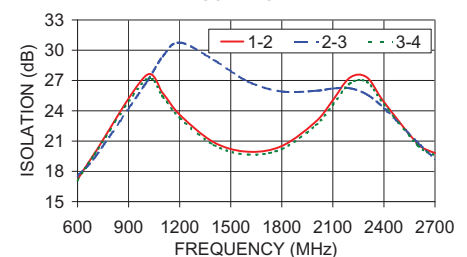

Electrical Schematic



Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com
IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs & shopping online see web site

REV. A
M140038
ED-14338
SEPS-4-272+
WP/CP/AM
130108