

Coaxial

Power Splitter/Combiner

ZAPD-2-22-75+

2 Way-0° 75Ω 910 to 2150 MHz


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	5W max.
Internal Dissipation	0.25W max.
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2

Outline Drawing

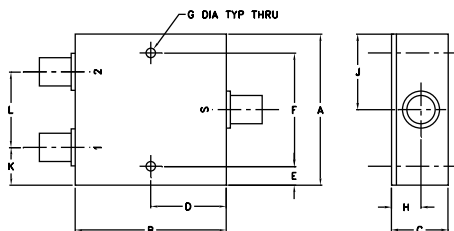

Outline Dimensions (Inch/mm)

A	B	C	D	E	F	G
2.00	2.00	0.75	1.00	0.25	1.500	0.125
50.80	50.80	19.05	25.40	6.35	38.10	3.18
H	J	K	L			
0.39	1.00	0.50	1.00			
9.91	25.40	12.70	25.40			
				wt		
				grams		
				170.0		

Features

- wideband, 910 to 2150 MHz
- low insertion loss, 0.2 dB typ.
- high isolation, 30 dB typ.
- up to 5W power input as splitter
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 0.5 deg. typ.
- excellent VSWR, 1.1:1 typ.
- rugged shielded case

Applications

- communications systems
- cellular
- catv
- GPS




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)	INSERTION LOSS (dB) ABOVE 3.0 dB	PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	VSWR (:1)
f_L - f_U	Typ. Min.	Typ. Max.	Max.	Max.	S Typ. Max. OUT Typ. Max.
910-2150	30 20	0.2 0.7	2	0.4	1.15 1.6 1.1 1.3

Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)	Amplitude Unbalance (dB)	Isolation (dB)	VSWR S	VSWR 1	VSWR 2
	S-1 S-2					
910.00	3.22 3.21	0.01	25.17	1.31	1.19	1.20
1000.00	3.15 3.13	0.02	31.54	1.16	1.19	1.21
1100.00	3.14 3.12	0.02	37.09	1.06	1.19	1.21
1200.00	3.14 3.13	0.01	34.21	1.09	1.19	1.20
1300.00	3.16 3.15	0.01	34.12	1.14	1.17	1.18
1350.00	3.14 3.13	0.01	35.17	1.14	1.15	1.16
1400.00	3.16 3.13	0.03	36.38	1.14	1.13	1.13
1500.00	3.16 3.12	0.04	34.92	1.12	1.11	1.09
1600.00	3.14 3.14	0.01	30.17	1.13	1.12	1.10
1700.00	3.15 3.14	0.01	27.34	1.19	1.16	1.15
1750.00	3.13 3.09	0.04	26.56	1.22	1.18	1.16
1800.00	3.15 3.12	0.03	26.32	1.25	1.19	1.18
1900.00	3.16 3.15	0.01	27.36	1.31	1.20	1.21
2000.00	3.22 3.19	0.03	31.25	1.32	1.19	1.21
2150.00	3.28 3.27	0.01	25.86	1.27	1.13	1.15

1. Total Loss = Insertion Loss + 3dB splitter loss.

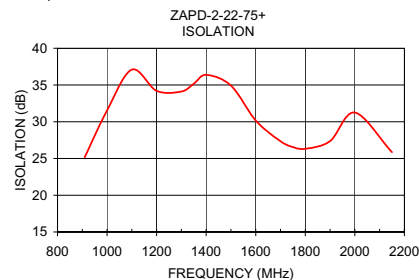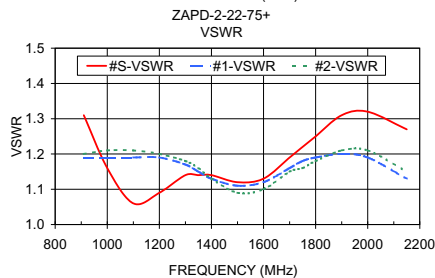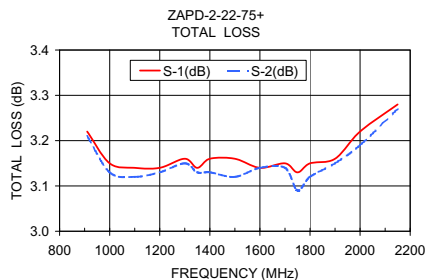

electrical schematic



Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine [minicircuits.com](http://www.minicircuits.com) Provides ACTUAL Data Instantly at [minicircuits.com](http://www.minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs
& shopping online see web site

REV. C
M127604
ZAPD-2-22-75+
HY/TD/CP/AM
100614