

Coaxial

Power Splitter/Combiner

2 Way-180° 50Ω 5 to 300 MHz

ZFSCJ-2-3



BNC version shown
CASE STYLE: K18


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

SUM PORT	3
PORT 1	1
PORT 2	2

Outline Drawing

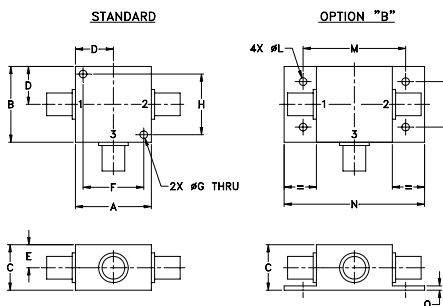

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
1.25	1.25	.75	.63	.38	1.00	.125	1.000
31.75	31.75	19.05	16.00	9.65	25.40	3.18	25.40

J	K	L	M	N	P	Q	wt
--	--	.125	1.688	2.18	.75	.07	grams
--	--	3.18	42.88	55.37	19.05	1.78	70.0

For bracket version, Option B dimension "C" changes from 0.75 to 0.94 inch when connectors are Type N.

Features

- low insertion loss, 1.0 dB typ.
- high isolation, 33 dB typ.
- rugged shielded case

Applications

- VHF
- signal processing

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 3.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L		M		U	
	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
5-300	30	20	33	25	30	18	1.0	1.5	1.0	1.5	1.0	1.5	2	4	6	0.15	0.2	0.5

L = low range [f_L to 10 f_L] M = mid range [10 f_L to $f_U/2$] U = upper range [$f_U/2$ to f_U]


Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
5.00	3.64	3.62	0.02	31.73	179.50	1.08	1.23	1.22
10.00	3.61	3.62	0.01	32.06	179.50	1.03	1.21	1.21
13.40	3.65	3.61	0.04	32.11	179.40	1.02	1.20	1.20
20.00	3.64	3.61	0.03	32.09	179.40	1.01	1.20	1.20
30.30	3.59	3.65	0.06	32.20	179.30	1.03	1.21	1.21
50.00	3.70	3.68	0.02	32.34	179.10	1.05	1.22	1.22
64.00	3.73	3.71	0.02	32.48	179.00	1.06	1.23	1.23
89.30	3.80	3.72	0.08	33.03	178.80	1.08	1.23	1.23
100.00	3.80	3.78	0.02	33.32	178.70	1.08	1.23	1.23
123.00	3.85	3.81	0.04	34.12	178.60	1.09	1.23	1.23
148.30	3.85	3.80	0.05	35.26	178.40	1.11	1.22	1.23
198.90	3.95	3.88	0.07	39.32	178.10	1.13	1.22	1.22
249.40	3.99	3.92	0.07	48.08	177.80	1.16	1.21	1.21
274.70	3.99	3.93	0.06	51.04	177.70	1.17	1.22	1.20
300.00	4.03	4.01	0.02	43.94	177.50	1.18	1.23	1.20

1. Total Loss = Insertion Loss + 3dB splitter loss.

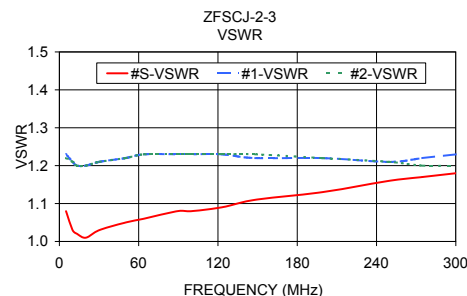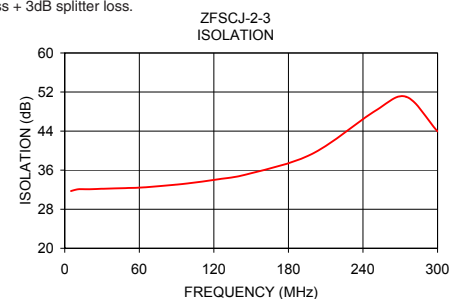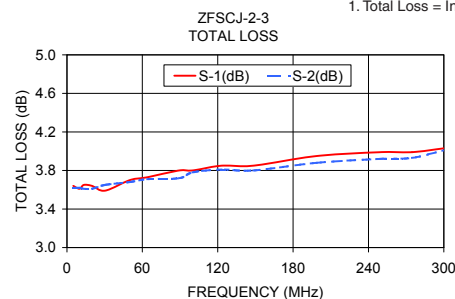

electrical schematic



Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
IF/RF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine [minicircuits.com](http://www.minicircuits.com) Provides ACTUAL Data Instantly at [minicircuits.com](http://www.minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. B
M127604
ZFSCJ-2-3
HY/TD/CP/AM
120306