

Coaxial

Power Splitter/Combiner

4 Way-0° 50Ω 1000 to 2000 MHz

ZA4PD-2+



N-Type version shown
CASE STYLE: DD52

Connectors	Model	Price	Qty.
SMA	ZA4PD-2-S+	\$89.95	(1-9)
N-TYPE	ZA4PD-2-N+	\$89.95	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	0.375W max.

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2
PORT 3	3
PORT 4	4

Outline Drawing

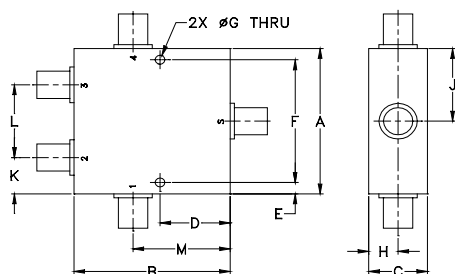

Outline Dimensions (inch mm)

A	B	C	D	E	F	G
2.00	2.00	.75	.90	.156	1.688	.125
50.80	50.80	19.05	22.86	3.96	42.88	3.18

H	J	K	L	M	wt
.38	1.00	.50	1.00	1.25	grams
9.65	25.40	12.70	25.40	31.75	150.00

Features

- wideband, 1000 to 2000 MHz
- good isolation, 25 dB typ.
- up to 10W power input as splitter
- good VSWR, 1.20:1 typ.

Applications

- GPS
- communication systems




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 6.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
$f_L - f_U$	Typ.	Min.	Typ.	Max.	Max.	Max.
1000-2000	25	16	0.3	1.0	6	0.7

Typical Performance Data

Freq. (MHz)	Total Loss¹ (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR	VSWR	VSWR	VSWR	VSWR
	S-1	S-2	S-3	S-4		1-2	2-3	3-4		S	1	2	3	4
1000	6.24	6.27	6.27	6.25	0.03	27.53	39.12	27.62	1.90	1.56	1.21	1.29	1.29	1.20
1100	6.22	6.27	6.27	6.22	0.05	31.69	30.28	31.80	1.94	1.41	1.21	1.22	1.22	1.20
1150	6.23	6.31	6.31	6.22	0.09	32.16	29.02	32.26	1.75	1.33	1.21	1.19	1.19	1.20
1200	6.23	6.27	6.27	6.23	0.04	31.48	28.57	31.60	1.87	1.26	1.21	1.16	1.16	1.20
1300	6.28	6.30	6.29	6.27	0.03	29.21	29.81	29.31	1.80	1.13	1.21	1.12	1.12	1.20
1400	6.35	6.32	6.32	6.35	0.03	27.14	34.29	27.23	1.85	1.11	1.21	1.11	1.11	1.21
1450	6.40	6.34	6.34	6.40	0.06	26.20	38.20	26.28	1.94	1.16	1.21	1.11	1.11	1.21
1500	6.43	6.35	6.35	6.44	0.09	25.20	40.24	25.27	1.97	1.21	1.21	1.11	1.11	1.21
1600	6.47	6.33	6.33	6.47	0.14	23.35	32.69	23.40	2.24	1.31	1.21	1.10	1.10	1.21
1700	6.46	6.27	6.28	6.46	0.19	22.16	28.53	22.21	2.63	1.39	1.21	1.06	1.07	1.21
1750	6.38	6.24	6.25	6.38	0.14	21.95	27.42	21.95	3.03	1.42	1.20	1.05	1.05	1.21
1800	6.40	6.20	6.21	6.40	0.20	21.97	26.70	22.00	3.00	1.44	1.20	1.03	1.04	1.21
1900	6.32	6.13	6.13	6.31	0.19	22.90	26.38	22.87	3.10	1.44	1.18	1.09	1.08	1.19
1950	6.33	6.16	6.16	6.32	0.17	24.05	27.01	23.98	3.27	1.44	1.17	1.14	1.13	1.18
2000	6.35	6.13	6.12	6.32	0.23	25.87	28.42	25.77	3.05	1.44	1.15	1.19	1.18	1.16

1. Total Loss = Insertion Loss + 6dB splitter loss.

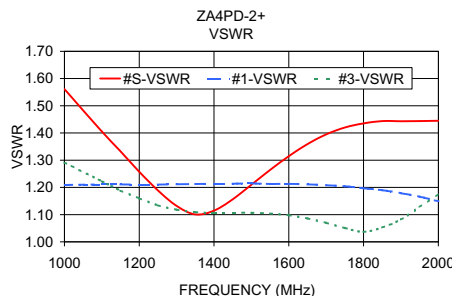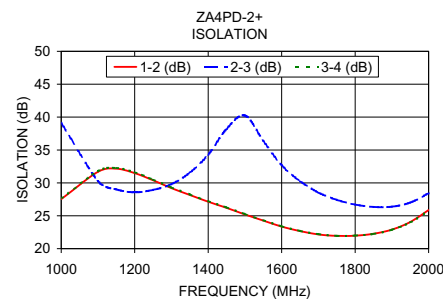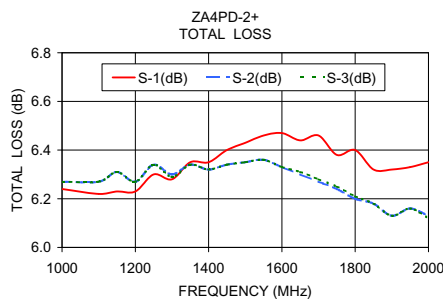

electrical schematic



Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine **minicircuits.com** Provides ACTUAL Data Instantly at **minicircuits.com**
IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. D
M127604
ZA4PD-2
HY/TD/CP/AM
100617