

Coaxial

Power Splitter/Combiner

4 Way-0° 50Ω 2000 to 4200 MHz


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	0.375W max.
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2
PORT 3	3
PORT 4	4

Outline Drawing

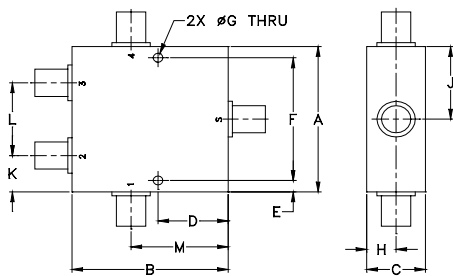

Outline Dimensions (inch mm)

A	B	C	D	E	F	G
2.00	2.00	.75	.90	.156	1.688	.125
50.80	50.80	19.05	22.86	3.96	42.88	3.18

H	J	K	L	M	wt
.38	1.00	.50	1.00	1.25	grams
9.65	25.40	12.70	25.40	31.75	150.00

Features

- wideband, 2000 to 4200 MHz
- good isolation, 25 dB typ.
- up to 10W power input as splitter

Applications

- MMDS
- wireless communication



N-Type version shown
CASE STYLE: DD52

Connectors	Model	Price	Qty.
SMA	ZA4PD-4-S(+)	\$89.95	(1-9)
N-TYPE	ZA4PD-4-N(+)	\$89.95	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 6.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
$f_L - f_U$	Typ.	Min.	Typ.	Max.	Max.	Max.
2000-4200	25	16	0.5	1.0	16	0.8

Typical Performance Data

Freq. (MHz)	Total Loss¹ (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR	VSWR	VSWR	VSWR	VSWR
	S-1	S-2	S-3	S-4		1-2	2-3	3-4		S	1	2	3	4
2000.00	6.44	6.28	6.30	6.44	0.16	29.99	26.13	29.17	1.49	1.33	1.11	1.20	1.20	1.10
2220.00	6.47	6.24	6.28	6.48	0.24	36.22	23.10	32.98	1.58	1.40	1.10	1.21	1.21	1.10
2440.00	6.58	6.37	6.41	6.59	0.22	39.29	22.41	34.60	1.59	1.49	1.08	1.23	1.21	1.10
2550.00	6.62	6.40	6.43	6.63	0.23	41.23	22.65	35.90	2.05	1.51	1.08	1.24	1.21	1.09
2660.00	6.60	6.44	6.46	6.61	0.17	45.46	23.35	38.23	1.96	1.51	1.07	1.23	1.21	1.09
2715.00	6.52	6.21	6.25	6.53	0.32	49.59	23.57	39.84	1.65	1.42	1.06	1.23	1.20	1.09
2880.00	6.54	6.26	6.30	6.55	0.29	47.42	25.73	46.22	1.96	1.38	1.06	1.21	1.18	1.08
3045.00	6.49	6.16	6.20	6.50	0.34	37.74	28.98	39.58	2.02	1.29	1.05	1.19	1.16	1.08
3210.00	6.53	6.19	6.24	6.54	0.35	33.51	35.51	34.63	2.21	1.23	1.03	1.18	1.15	1.06
3430.00	6.58	6.21	6.22	6.55	0.38	32.07	45.95	32.73	2.11	1.15	1.02	1.17	1.13	1.03
3540.00	6.55	6.14	6.18	6.55	0.42	32.32	35.52	32.51	2.49	1.18	1.03	1.17	1.13	1.00
3650.00	6.53	6.12	6.17	6.54	0.42	33.22	31.12	32.91	2.64	1.20	1.07	1.18	1.15	1.04
3815.00	6.69	6.22	6.26	6.67	0.47	37.05	27.33	35.53	2.77	1.20	1.14	1.20	1.17	1.10
4035.00	6.64	6.12	6.15	6.65	0.53	40.08	23.88	38.84	3.02	1.17	1.21	1.23	1.21	1.17
4200.00	6.67	6.10	6.15	6.68	0.58	30.89	21.99	31.59	3.20	1.20	1.26	1.24	1.23	1.24

1. Total Loss = Insertion Loss + 6dB splitter loss.

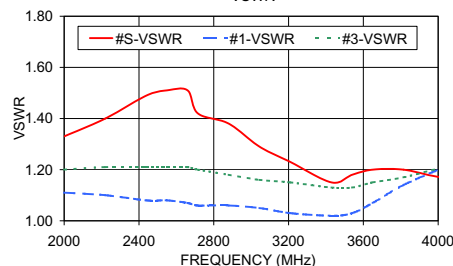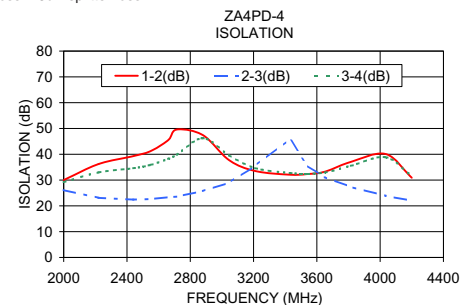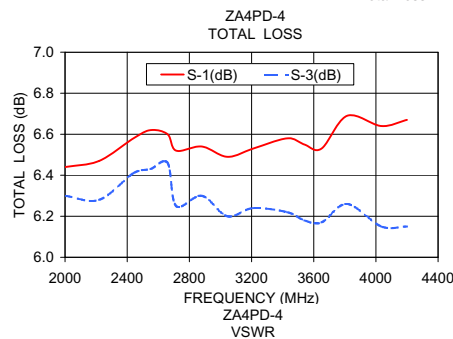

electrical schematic



For detailed performance specs & shopping online see web site

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
IFIRF MICROWAVE COMPONENTS

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine [minicircuits.com](http://www.minicircuits.com) Provides ACTUAL Data Instantly at [minicircuits.com](http://www.minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. C
M127604
ZA4PD-4
HY/TD/CP/AM
100617