

Coaxial

Power Splitter/Combiner

4 Way-0° 50Ω 0.002 to 20 MHz

ZMSC-4-2+ ZMSC-4-2



Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.250W max.
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2
PORT 3	3
PORT 4	4

Features

- high isolation, 33 dB typ.
- rugged shielded case

Applications

- HF
- amateur radio

Connectors	Model	Price	Qty.
SMA	ZMSC-4-2(+)	\$76.95	(1-9)
BRACKET (OPTION "B")		\$5.00	(1+)
BRACKET (OPTION "BR")		\$1.50	(1+)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.

Electrical Specifications

FREQ.* RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 6.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L		M		U	
	Typ.	Min	Typ.	Min	Typ.	Min	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
0.002-20	30	20	33	25	33	25	0.45	0.75	0.3	0.5	0.7	1.0	4	6	8	0.15	0.20	0.25

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]


* At low range frequency band (f_L to $10 f_L$), linearly derate maximum power by 13dB.

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR	VSWR	VSWR	VSWR	VSWR
	S-1	S-2	S-3	S-4		1-2	2-3	3-4		S	1	2	3	4
0.002	6.440	6.440	6.410	6.410	0.030	28.370	24.590	29.080	0.320	1.580	1.860	1.860	1.920	1.920
0.005	6.260	6.260	6.260	6.260	0.010	29.820	30.590	29.890	0.200	1.410	1.360	1.360	1.380	1.380
0.010	6.230	6.230	6.230	6.220	0.000	30.090	35.540	30.080	0.110	1.380	1.210	1.210	1.220	1.220
0.014	6.220	6.220	6.220	6.220	0.000	30.110	37.820	30.110	0.080	1.380	1.180	1.180	1.180	1.180
0.020	6.220	6.220	6.220	6.220	0.000	30.120	39.980	30.110	0.060	1.370	1.150	1.150	1.150	1.150
0.142	6.220	6.220	6.220	6.220	0.000	30.110	44.600	30.110	0.020	1.370	1.130	1.130	1.130	1.130
0.265	6.220	6.220	6.220	6.220	0.000	30.100	44.820	30.120	0.040	1.370	1.130	1.130	1.130	1.130
0.510	6.220	6.220	6.220	6.220	0.000	30.120	44.840	30.140	0.050	1.370	1.130	1.130	1.130	1.130
1.000	6.220	6.220	6.230	6.220	0.000	30.190	44.690	30.200	0.090	1.370	1.130	1.130	1.120	1.120
5.000	6.320	6.320	6.320	6.320	0.010	31.240	42.390	31.090	0.280	1.390	1.110	1.110	1.110	1.110
10.000	6.410	6.410	6.420	6.410	0.010	32.480	39.090	31.850	0.530	1.400	1.090	1.090	1.090	1.090
12.000	6.440	6.440	6.450	6.440	0.010	32.970	38.030	32.080	0.630	1.390	1.090	1.090	1.090	1.090
15.000	6.480	6.480	6.480	6.480	0.010	33.770	36.690	32.420	0.780	1.380	1.080	1.080	1.080	1.080
18.000	6.510	6.510	6.520	6.520	0.010	34.700	35.550	32.820	0.920	1.360	1.070	1.070	1.070	1.070
20.000	6.530	6.530	6.540	6.540	0.010	35.410	34.890	33.160	1.030	1.350	1.070	1.070	1.070	1.060




1. Total Loss = Insertion Loss + 6dB splitter loss.

Outline Drawing

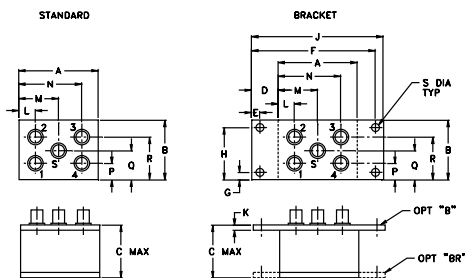

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
1.50	1.13	1.00	.50	.155	2.345	.138	.987	2.50
38.10	28.70	25.40	12.70	3.94	59.56	3.51	25.07	63.50
K	L	M	N	P	Q	R	S	wt
.10	.32	.75	1.18	.31	.56	.81	.150	grams
2.54	8.13	19.05	29.97	7.87	14.22	20.57	3.81	45.0

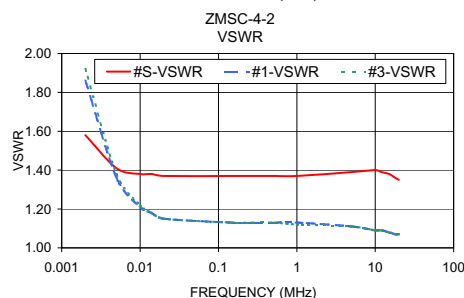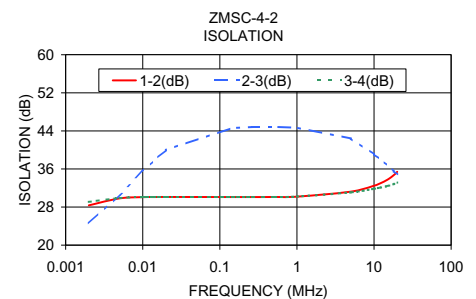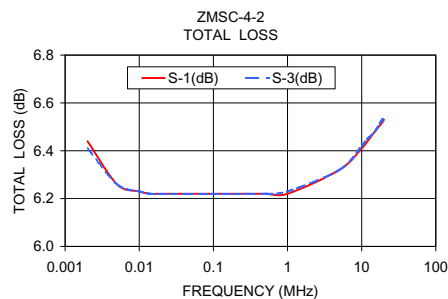

electrical schematic



Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine [minicircuits.com](http://www.minicircuits.com) Provides ACTUAL Data Instantly at [minicircuits.com](http://www.minicircuits.com)
IF/RF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. B
M128050
ZMSC-4-2
HY/TD/CP/AM
100719