

DC Pass

Power Splitter/Combiner

4 Way-0° 50Ω 1600 to 6400 MHz

ZN4PD-642W+



CASE STYLE: UU182

Connectors	Model	Price	Qty.
SMA	ZN4PD-642W-S+	\$119.95	(1-9)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	1.2W max.
DC Current (each port)	1A max.

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUMPORT	S
PORT 1	1
PORT 2	2
PORT 3	3
PORT 4	4

Outline Drawing



Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
2.75	2.80	.63	.125	2.625	—	.125
69.85	71.12	16.00	3.18	66.68	—	3.18
H	J	K	L	M	wt	
1.38	.31	.500	.125	2.675	grams	
35.05	7.87	12.70	3.18	67.95	140	

Electrical Schematic



Features

- wideband, 1600 to 6400 MHz
- low insertion loss, 1.0 dB typ.
- low amplitude unbalance, 0.1 dB typ.
- low phase unbalance, 2deg. typ.
- excellent output VSWR, 1.15:1 typ.
- DC Pass from sum port to all output ports

Applications

- high band PCS
- UNII
- WIMAX
- WiFi
- bluetooth




Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		1600		6400	MHz
Insertion Loss (above theoretical 6.0 dB)	1600 - 4200 4200 - 6400	— —	0.7 1.0	1.2 1.6	dB
Isolation	1600 - 4200 4200 - 6400	17 18	23 25	—	dB
Phase Unbalance	1600 - 4200 4200 - 6400	— —	2 4	5 8	Degree
Amplitude Unbalance	1600 - 4200 4200 - 6400	— —	0.1 0.2	0.4 0.7	dB
VSWR (Port S)	1600 - 4200 4200 - 6400	— —	1.25 1.2	—	:1
VSWR (Port 1-4)	1600 - 4200 4200 - 6400	— —	1.2 1.15	—	:1

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)				Amp. Unb. (dB)	Isolation (dB)			Phase Unb. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
1600	6.44	6.41	6.42	6.43	0.03	25.70	29.53	25.76	0.98	1.29	1.18	1.16	1.17	1.16
2000	6.44	6.40	6.42	6.43	0.03	23.23	30.09	23.68	1.19	1.16	1.08	1.06	1.06	1.06
2300	6.48	6.48	6.46	6.47	0.03	21.81	29.98	22.21	1.42	1.16	1.06	1.02	1.03	1.02
2700	6.58	6.60	6.57	6.56	0.03	24.31	32.44	24.60	1.45	1.10	1.12	1.06	1.07	1.07
3000	6.61	6.62	6.60	6.58	0.04	31.71	39.88	32.19	1.67	1.10	1.13	1.07	1.09	1.09
3400	6.68	6.68	6.66	6.64	0.04	35.74	43.12	36.76	1.99	1.18	1.24	1.17	1.19	1.18
3800	6.79	6.79	6.77	6.72	0.07	29.58	35.39	30.88	2.21	1.23	1.22	1.16	1.17	1.15
4000	6.80	6.82	6.78	6.74	0.08	25.87	33.94	26.91	2.25	1.20	1.23	1.15	1.15	1.14
4200	6.81	6.84	6.79	6.75	0.10	23.81	33.58	24.81	2.30	1.19	1.25	1.16	1.16	1.15
4800	6.84	6.86	6.86	6.81	0.05	32.49	32.91	32.09	2.57	1.21	1.17	1.07	1.11	1.10
5000	6.91	6.93	6.94	6.89	0.05	36.92	33.92	32.89	2.63	1.25	1.21	1.11	1.16	1.14
5400	7.09	7.14	7.12	7.07	0.07	29.36	36.97	29.80	3.02	1.08	1.25	1.17	1.20	1.18
5800	6.97	7.05	7.01	6.92	0.13	24.44	40.24	26.23	3.46	1.24	1.25	1.18	1.18	1.19
6000	6.97	7.04	7.02	6.95	0.10	24.50	42.61	26.05	3.78	1.20	1.14	1.14	1.14	1.15
6400	7.06	7.11	7.09	7.05	0.06	33.44	34.19	32.35	4.55	1.24	1.18	1.06	1.09	1.08

1. Total Loss = Insertion Loss + 6dB splitter loss.

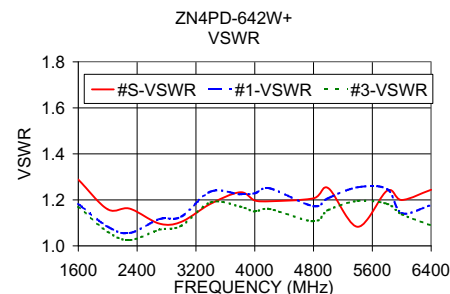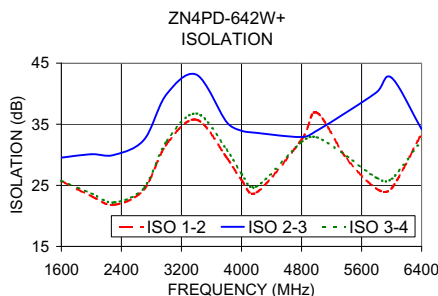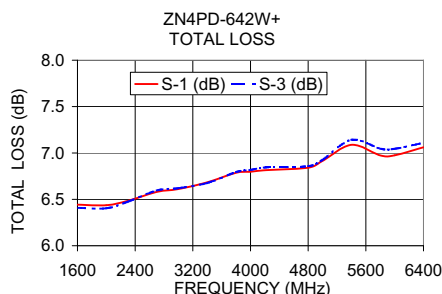

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com
IF/RF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 [The Design Engineers Search Engine](http://minicircuits.com) Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M134156
ED-14603
ZN4PD-642W+
WP/CP/AM
120109