

Coaxial

Power Splitter/Combiner

6 Way-0° 50Ω 800 to 2000 MHz

ZB6PD-2+




Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	0.875W max.
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

SUM PORT	S
PORT 1,2,3,4,5,6	1,2,3,4,5,6

Outline Drawing

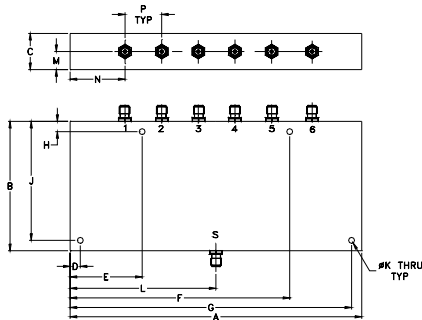

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
7.06	3.13	.88	.250	1.750	5.310	6.810	.250
179.32	79.50	22.35	6.35	44.45	134.87	172.97	6.35

J	K	L	M	N	P	wt
2.875	.144	3.53	.44	1.31	.89	grams
73.03	3.66	89.66	11.18	33.27	22.61	800

Features

- wideband, 800 to 2000 MHz
- excellent VSWR, 1.1:1 typ. output
- high isolation, 27dB typ.
- rugged, shielded case
- up to 10W power input as splitter

Applications

- cellular
- PCN
- instrumentation
- satellite distribution


Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 7.8 dB		AMPLITUDE UNBALANCE (dB)	VSWR (:1)			
	Typ.	Min.	Typ.	Max.		S		OUT	
f _L -f _U					Max.	Typ.	Max.	Typ.	Max.
800-2000	27	17	0.7	1.7	0.7	1.2	1.6	1.13	1.3

Typical Performance Data


Frequency (MHz)	Total Loss ¹ (dB)	Amplitude Unbalance (dB)	Isolation (dB)		VSWR S	VSWR OUTPUTS
			Adjacent	Opposite		
801.50	8.47	0.33	39.60	23.12	1.15	1.21
887.00	8.49	0.31	32.26	24.98	1.12	1.19
986.50	8.54	0.33	27.48	26.44	1.21	1.18
1085.00	8.52	0.31	26.40	28.83	1.18	1.17
1179.50	8.53	0.31	25.53	31.14	1.03	1.11
1278.50	8.60	0.31	22.70	28.45	1.21	1.07
1377.50	8.61	0.30	22.46	26.13	1.31	1.12
1472.00	8.66	0.30	26.27	26.38	1.25	1.15
1571.00	8.69	0.27	38.21	32.21	1.19	1.15
1665.00	8.71	0.26	38.95	29.48	1.19	1.11
1764.50	8.77	0.33	31.36	27.36	1.21	1.06
1863.50	8.84	0.30	29.93	27.81	1.22	1.07
1913.00	8.89	0.32	28.17	27.62	1.23	1.07
1958.00	8.97	0.34	24.73	25.52	1.24	1.07
1998.50	9.01	0.35	21.70	23.15	1.25	1.07

ZB6PD-2+
TOTAL LOSS

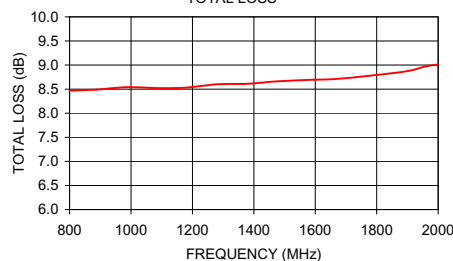


1. Total Loss = Insertion Loss + 7.8dB splitter loss.


ZB6PD-2+
ISOLATION

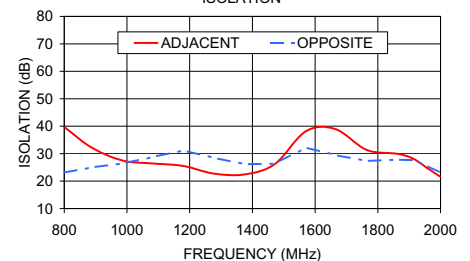

ZB6PD-2+
VSWR

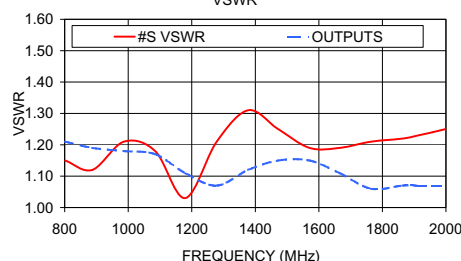

electrical schematic

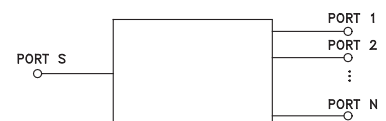

For detailed performance specs
& shopping online see web site

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IFIRF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. C
M131858
ZB6PD-2+
HY/TD/CP/AM
120119