

Coaxial

Power Splitter/Combiner

9 Way-0° 50Ω 1200 to 1700 MHz


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	1.5W max.
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

SUM PORT	S(COM)
PORT 1,2,3,.....,9	1,2,3,.....,9

Outline Drawing

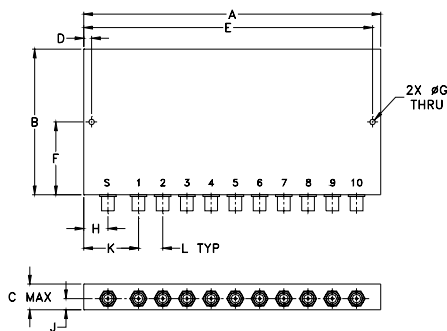

Outline Dimensions (inch mm)

A	B	C	D	E	F
6.13	3.00	.53	.162	5.962	1.500
155.70	76.20	13.46	4.11	151.43	38.10
G	H	J	K	L	wt
.116	.50	.25	1.13	.50	grams
2.95	12.70	6.35	28.70	12.70	207

Electrical Schematic



Features

- useable from 1100 to 1700 MHz
- low insertion loss, 0.6 dB typ.
- high isolation, 18 dB typ.
- excellent output VSWR, 1.2:1 typ.
- rugged shielded case

Applications

- GPS
- instrumentation
- signal processing

ZC9PD-172+



CASE STYLE: AB204

Connectors	Model	Price	Qty.
SMA	ZC9PD-172-S+	\$158.95 ea.	(1-9)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications




Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		1200	—	1700	MHz
Insertion Loss Above 9.6 dB	1200 - 1700	—	0.6	1.5	dB
Isolation	1200 - 1500 1500 - 1700	17 13	20 18	—	dB
Phase Unbalance	1200 - 1700	—	7.0	10	Degree
Amplitude Unbalance	1200 - 1700	—	0.4	0.8	dB
VSWR Input	1200 - 1300 1300 - 1700	— —	1.5 1.2	2.0 1.7	:1
VSWR Output	1200 - 1700	—	1.2	1.5	:1

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)			Amplitude Unbalance (dB)	Isolation (dB)		Phase unbalance (deg.)	VSWR S	VSWR 1	VSWR 3
	S-1	S-2	S-3		1-2	1-3				
1200.00	10.42	10.39	10.41	0.14	26.40	19.98	6.01	1.75	1.09	1.09
1260.00	10.24	10.23	10.24	0.15	31.13	21.56	6.42	1.50	1.09	1.10
1300.00	10.15	10.16	10.15	0.16	36.86	22.96	6.63	1.36	1.09	1.10
1360.00	10.06	10.10	10.07	0.20	36.55	25.78	6.93	1.17	1.09	1.04
1380.00	10.05	10.10	10.06	0.23	33.32	26.98	6.98	1.13	1.09	1.03
1400.00	10.04	10.09	10.05	0.25	30.83	28.36	7.05	1.08	1.09	1.03
1415.00	10.03	10.10	10.05	0.26	29.30	29.56	7.11	1.06	1.09	1.03
1425.00	10.04	10.10	10.06	0.27	28.42	30.45	7.15	1.05	1.09	1.03
1470.00	10.05	10.14	10.07	0.33	25.25	36.08	7.28	1.07	1.09	1.03
1485.00	10.06	10.15	10.08	0.33	24.41	38.88	7.33	1.09	1.09	1.04
1540.00	10.09	10.20	10.10	0.36	21.90	39.16	7.52	1.13	1.09	1.10
1580.00	10.12	10.23	10.10	0.42	20.44	32.73	7.43	1.15	1.09	1.05
1600.00	10.13	10.25	10.11	0.42	19.79	30.57	7.40	1.15	1.09	1.10
1650.00	10.18	10.30	10.13	0.39	18.34	26.65	7.71	1.18	1.08	1.10
1700.00	10.25	10.38	10.19	0.42	17.10	23.89	8.35	1.25	1.09	1.10

1. Total Loss = Insertion Loss + 9.6dB theoretical splitter loss.

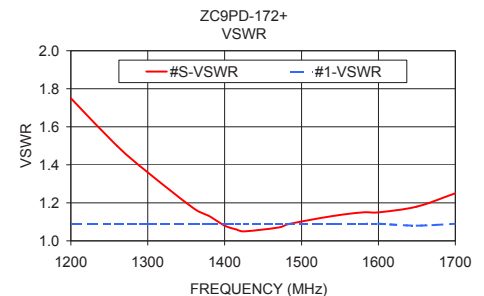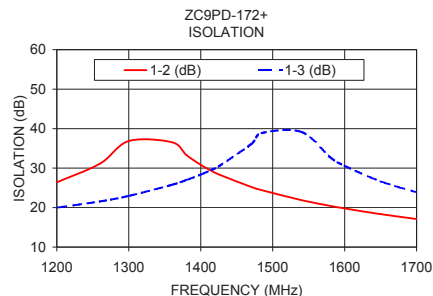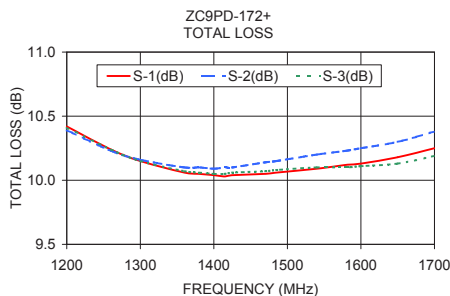

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M136593
ZC9PD-172+
ED-13292/1
HY/CP/AM
120328