

Coaxial

Power Splitter/Combiner

12 Way-0° 50Ω 800 to 2450 MHz


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	1.5W max.
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

SUM PORT	S(COM)
PORT 1,2,3,.....,12	1,2,3,.....,12

Outline Drawing

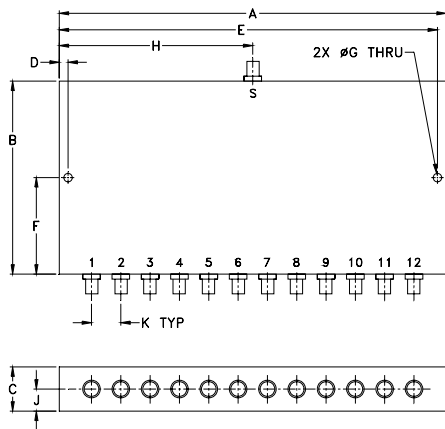

Outline Dimensions (inch mm)

A	B	C	D	E	F
6.60	3.28	.75	.150	6.45	1.64
167.64	83.31	19.05	3.81	163.83	41.66
G	H	J	K		wt
.144	3.30	.38	.500		grams
3.66	83.82	9.65	12.70		370

Features

- low insertion loss, 0.5 dB typ.
- high isolation, 23 dB typ.
- excellent VSWR, 1.2:1 typ.
- excellent amplitude unbalance, 0.3 dB typ.

Applications

- instrumentation
- PCS
- GSM
- cellular
- cellular
- WCDMA
- PDC
- radar



CASE STYLE: UU589

Connectors	Model	Price	Qty.
SMA	ZN12PD-252-S+	\$269.00	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 10.8 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	VSWR (:1)	
	Adjacent Typ.	Opposite Min.	Typ.	Max.	Max.	Max.	S Typ.	OUT Typ.
800-1000	16	33	0.45	1.0	5	0.5	1.6	1.2
1000-2450	23	30	0.6	1.4	8	0.7	1.2	1.1

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)	Amplitude Unbalance (dB)	Isolation (dB)		Phase Unbalance (deg.)	VSWR S	VSWR 12
			Adjacent	Opposite			
800.00	11.30	0.33	15.14	28.37	2.36	1.64	1.18
850.00	11.39	0.32	15.98	30.39	2.52	1.74	1.16
900.00	11.41	0.32	16.76	33.00	2.56	1.75	1.14
1000.00	11.27	0.32	18.49	42.57	2.96	1.54	1.10
1100.00	11.14	0.33	21.23	38.77	3.07	1.26	1.09
1200.00	11.16	0.33	25.22	33.25	3.15	1.26	1.10
1300.00	11.20	0.32	28.91	31.83	3.15	1.27	1.10
1400.00	11.20	0.28	29.44	32.36	3.31	1.12	1.09
1500.00	11.25	0.23	27.39	33.34	3.29	1.12	1.09
1600.00	11.31	0.20	25.65	33.09	3.54	1.24	1.09
1800.00	11.30	0.15	24.77	30.69	4.08	1.13	1.07
2000.00	11.36	0.17	26.54	26.26	4.96	1.07	1.03
2300.00	11.64	0.31	32.29	23.70	5.94	1.29	1.03
2400.00	11.64	0.27	28.56	23.35	6.19	1.23	1.10
2450.00	11.80	0.26	23.16	22.56	6.16	1.50	1.15

1. Total Loss = Insertion Loss + 10.8dB splitter loss.

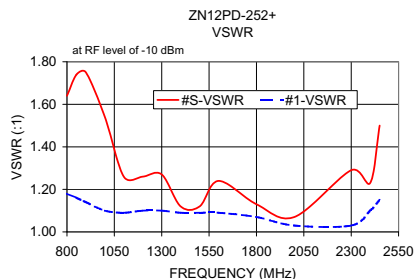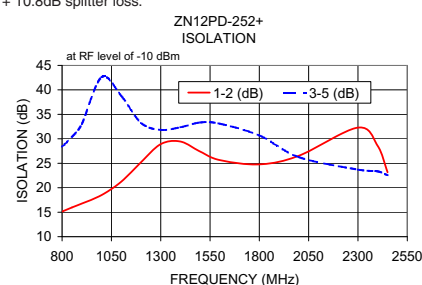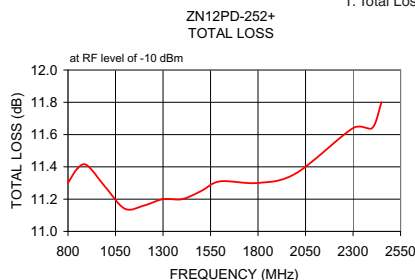

electrical schematic



Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine [minicircuits.com](http://www.minicircuits.com) Provides ACTUAL Data Instantly at [minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs & shopping online see web site

REV. A
M127604
ZN12PD-252+
ED-11392/1
HY/TD/CP
100603