

Coaxial Power Splitter/Combiner

ZFSC-24-11-75

24 Way-0° 75Ω 1 to 200 MHz


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.87W max.
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

SUM PORT	S (COM)
PORT 1,2,3,4,.....,24	1,2,3,4,.....,24

Outline Drawing

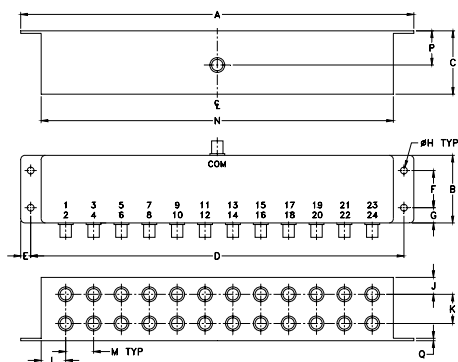

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
9.31	1.60	1.50	8.84	.24	.88	.36	.160
236.47	40.64	38.10	224.54	6.10	22.35	9.14	4.06
J	K	L	M	N	P	Q	wt.
.40	.69	.54	.66	8.34	.81	.06	grams
10.16	17.53	13.72	16.76	211.84	20.57	1.52	490.0

Features

- high isolation, 33 dB typ.
- low insertion loss, 0.8 dB typ.

Applications

- HF/VHF
- instrumentation
- test set-ups



BNC version shown

CASE STYLE: R31

Connectors	Model	Price	Qty.
BNC	ZFSC-24-11-75	\$274.95	(1-9)

Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 13.8 dB						AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U
	Typ.	Min.	Typ.	Min.	Typ.	Typ.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.
f _L -f _U															
1-200	35	25	33	20	27	20	0.6	1.3	0.8	1.5	1.1	2.0	0.6	0.4	0.6

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]


Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)	Amplitude Unbalance (dB)	Isolation (dB)		Phase Unbalance (deg.)	VSWR S	VSWR OUTPUT
			Adjacent	Opposite			
1.00	14.67	0.30	31.76	40.16	1.39	1.25	1.15
10.00	14.39	0.20	37.20	38.39	1.14	1.06	1.08
24.00	14.45	0.16	37.13	36.83	2.04	1.13	1.08
31.00	14.48	0.15	36.74	36.01	2.51	1.16	1.08
45.00	14.51	0.16	35.93	34.79	3.27	1.21	1.09
59.00	14.55	0.17	34.96	33.80	3.95	1.24	1.10
73.00	14.60	0.17	34.02	33.01	4.66	1.24	1.11
80.00	14.61	0.17	33.57	32.73	5.16	1.24	1.12
100.00	14.63	0.17	32.35	31.97	6.23	1.22	1.14
124.00	14.71	0.19	31.21	31.49	7.69	1.17	1.17
140.00	14.74	0.20	30.61	31.42	8.64	1.16	1.20
164.00	14.82	0.22	29.90	31.80	9.96	1.18	1.25
180.00	14.89	0.23	29.58	32.37	10.88	1.23	1.28
192.00	14.93	0.25	29.42	33.10	11.63	1.27	1.31
200.00	14.96	0.26	29.27	33.67	12.12	1.30	1.33

ZFSC-24-11-75
TOTAL LOSS

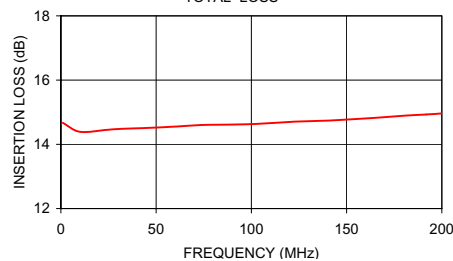


ZFSC-24-11-75
VSWR

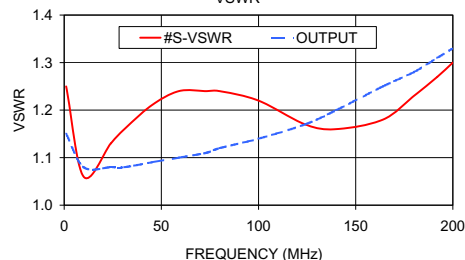

1. Total Loss = Insertion Loss + 13.8dB splitter loss.

ZFSC-24-11-75
ISOLATION

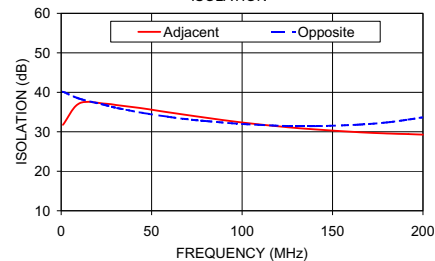

electrical schematic



Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
IFIRF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. A
M127604
ZFSC-24-11-75
HY/TD/CP
100602