

Frequency Synthesizer

KSN-1935A+

50Ω 1915 to 1935 MHz

The Big Deal

- Low phase noise and spurious
- Robust design and construction
- Small size 0.800" x 0.584" x 0.154"



CASE STYLE: DK1042

Product Overview


The KSN-1935A+ is a Frequency Synthesizer, designed to operate from 1915 to 1935 MHz for Cable TV applications. The KSN-1935A+ is packaged in a metal case (size of 0.800" x 0.584" x 0.154") to shield against unwanted signals and noise.

Key Features

Feature	Advantages
Low phase noise and spurious: <ul style="list-style-type: none">• Phase Noise: -107 dBc/Hz typ. @ 10 kHz offset• Comparison Spurious: -85 dBc typ.• Reference Spurious: -110 dBc typ.	Low phase noise and spurious improve system EVM (Error Vector Magnitude).
Robust design and construction	To enhance the robustness of KSN-1935A+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.
Small size, 0.800" x 0.584" x 0.154"	The small size enables the KSN-1935A+ to be used in compact designs.



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

50Ω 1915 to 1935 MHz

Features

- Integrated VCO + PLL
- Low phase noise and spurious
- Robust design and construction
- Low operating voltage (VCC VCO=+5V, VCC PLL=+3.3V)
- Small size 0.800" x 0.584" x 0.154"

Applications

- Cable TV

General Description

The KSN-1935A+ is a Frequency Synthesizer, designed to operate from 1915 to 1935 MHz for Cable TV application. The KSN-1935A+ is packaged in a metal case (size of 0.800" x 0.584" x 0.154") to shield against unwanted signals and noise. To enhance the robustness of KSN-1935A+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.



CASE STYLE: DK1042
PRICE: \$29.95 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Simplified Schematic



Electrical Specifications (over operating temperature -40°C to +85°C)

Parameters		Test Conditions	Min.	Typ.	Max.	Units								
Frequency Range		-	1915	-	1935	MHz								
Step Size		-	-	125	-	kHz								
Settling Time		Within ± 1 kHz	-	20	-	mSec								
Output Power		-	+0.5	+3.5	+6.5	dBm								
SSB Phase Noise		@ 100 Hz offset	-	-62	-	dBc/Hz								
		@ 1 kHz offset	-	-78	-68									
		@ 10 kHz offset	-	-107	-102									
		@ 100 kHz offset	-	-130	-126									
		@ 1 MHz offset	-	-150	-146									
Integrated SSB Phase Noise		@ 100Hz to 1MHz	-	-32	-	dBc								
Reference Spurious Suppression		Ref. Freq. 20 MHz	-	-110	-90	dBc								
Comparison Spurious Suppression		Step Size 125 kHz	-	-85	-75									
Non - Harmonic Spurious Suppression		-	-	-90	-									
Harmonic Suppression		-	-	-25	-18									
VCO Supply Voltage		+5.00	+4.75	+5.00	+5.25	V								
PLL Supply Voltage		+3.30	+3.15	+3.30	+3.45									
VCO Supply Current		-	-	48	55	mA								
PLL Supply Current		-	-	8	14									
Reference Input (External)		Frequency	20 (square wave)	-	20	-	MHz							
		Amplitude	1.0	-	1.0	-	V _{P-P}							
		Input impedance	-	-	100	-	KΩ							
		Phase Noise @ 1 kHz offset	-	-	-135	-	dBc/Hz							
RF Output port Impedance		-	-	50	-	Ω								
Input Logic Level		Input high voltage	-	2.80	-	-	V							
		Input low voltage	-	-	-	0.60	V							
Digital Lock Detect		Locked	-	2.75	-	3.45	V							
		Unlocked	-	-	-	0.40	V							
Frequency Synthesizer PLL		-	ADF4118											
PLL Programming		-	3-wire serial 3.3V CMOS											
Register Map ^{NOTE 1}	F_Register ^{NOTE 2}	<i>Reserved</i>	<i>Power-Down 2</i>	<i>Reserved</i>	<i>Timer Counter Control</i>	<i>Fastlock Mode</i>	<i>Reserved</i>	<i>Fastlock Enable</i>	<i>CP 3-State</i>	<i>PD Polarity</i>	<i>Muxout Control</i>	<i>Power-Down 1</i>	<i>Counter Reset</i>	<i>Control Bits</i>
		0	0	000	0000	0	0	0	0	1	001	0	0	10
	N_Register @ 1935 MHz	<i>CP Gain</i>	<i>13-Bit B Counter</i>									<i>5-Bit A Counter</i>		<i>Control Bits</i>
		1	0000111100011									11000		01
R_Register	<i>Lock Detect Precision</i>	<i>Test Mode Bits</i>			<i>14-BIT Reference Counter, R</i>							<i>Control Bits</i>		
	1	0000			00000010100000							00		

Note 1: Registers Load Sequence: Initialization Register, F Register, R Register , N Register.

Note 2: For the Initialization Register use Register F with Control Bits 11.

Absolute Maximum Ratings

Parameters	Ratings
VCO Supply Voltage ^{NOTE 3}	6V
PLL Supply Voltage ^{NOTE 3}	6V
VCO Power Supply to PLL Power Supply ^{NOTE 3}	-0.3V to +5.5V
Reference Frequency Voltage	-0.3Vmin, VCC PLL + 0.3Vmax
Data, Clock, LE Levels	-0.3Vmin, VCC PLL + 0.3Vmax
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

Permanent damage may occur if any of these limits are exceeded

Note 3: Power on/off Sequence: Power on: VCO Supply Voltage, followed by PLL Supply Voltage. Power off: PLL Supply Voltage, followed by VCO Supply Voltage.



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Typical Performance Data

FREQUENCY (MHz)	POWER OUTPUT (dBm)			VCO CURRENT (mA)			PLL CURRENT (mA)		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
	1915	3.42	3.92	3.82	44.83	47.55	48.87	5.65	7.57
1916	3.41	3.92	3.81	44.83	47.55	48.87	5.64	7.56	9.02
1925	3.36	3.87	3.76	44.79	47.48	48.81	5.65	7.57	9.03
1934	3.28	3.80	3.69	44.74	47.40	48.74	5.66	7.57	9.04
1935	3.27	3.79	3.68	44.74	47.39	48.73	5.66	7.58	9.05

FREQUENCY (MHz)	HARMONICS (dBc)					
	F2			F3		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
1915	-37.45	-48.72	-37.34	-22.41	-24.66	-26.60
1916	-37.50	-48.67	-37.22	-22.53	-24.80	-26.86
1925	-37.94	-45.86	-36.95	-23.53	-25.86	-28.12
1934	-36.83	-42.79	-36.27	-23.52	-26.38	-28.75
1935	-36.71	-42.51	-36.24	-23.51	-26.40	-28.41

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @ OFFSETS				
	+25°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
1915	-62.86	-80.63	-108.03	-130.14	-150.59
1916	-60.83	-78.83	-108.06	-130.33	-150.59
1925	-61.05	-78.23	-107.78	-130.22	-150.09
1934	-65.19	-77.73	-107.66	-129.82	-150.36
1935	-66.08	-77.61	-107.57	-129.84	-150.67

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @ OFFSETS				
	-45°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
1915	-62.92	-79.84	-108.24	-130.16	-150.39
1916	-63.67	-79.40	-107.10	-130.23	-150.45
1925	-61.78	-78.06	-107.44	-130.32	-150.92
1934	-64.01	-77.87	-107.16	-130.23	-150.48
1935	-61.87	-77.73	-106.39	-130.37	-150.14

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @ OFFSETS				
	+85°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
1915	-60.48	-76.46	-107.87	-129.78	-149.97
1916	-62.42	-78.55	-106.83	-129.66	-149.69
1925	-59.92	-76.41	-106.94	-129.56	-149.81
1934	-59.18	-78.24	-106.85	-129.32	-149.54
1935	-59.39	-76.89	-107.20	-129.53	-149.52



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

COMPARISON SPURIOUS ORDER	COMPARISON SPURIOUS @Fcarrier 1915MHz+(n*Fcomparison) (dBc) note 1			COMPARISON SPURIOUS @Fcarrier 1925MHz+(n*Fcomparison) (dBc) note 1			COMPARISON SPURIOUS @Fcarrier 1935MHz+(n*Fcomparison) (dBc) note 1		
	n	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C
-5	-108.69	-114.02	-114.91	-110.85	-107.63	-114.74	-111.22	-113.32	-113.90
-4	-110.74	-112.61	-108.85	-108.83	-108.71	-112.11	-109.36	-111.57	-110.06
-3	-102.95	-106.03	-106.70	-104.57	-107.59	-108.91	-103.59	-105.41	-107.86
-2	-97.42	-99.64	-98.02	-97.44	-99.46	-98.52	-92.49	-100.89	-98.31
-1	-88.58	-88.94	-86.37	-89.61	-88.19	-85.70	-88.42	-88.33	-85.46
0 ^{note 2}	-	-	-	-	-	-	-	-	-
+1	-89.16	-89.46	-86.99	-90.44	-86.91	-85.44	-87.99	-86.21	-87.94
+2	-95.75	-102.35	-100.66	-99.07	-100.18	-98.36	-95.90	-99.75	-99.55
+3	-105.65	-105.87	-104.86	-101.63	-107.70	-107.38	-105.43	-108.42	-103.22
+4	-109.35	-110.06	-112.49	-112.47	-111.31	-113.02	-111.47	-108.41	-109.30
+5	-113.93	-112.43	-112.76	-110.03	-116.04	-112.75	-113.06	-110.94	-115.19

Note 1: Comparison frequency 125 kHz

Note 2: All spurs are referenced to carrier signal (n=0).


REFERENCE SPURIOUS ORDER	REFERENCE SPURIOUS @Fcarrier 1915MHz+(n*Frefernce) (dBc) note 3			REFERENCE SPURIOUS @Fcarrier 1925MHz+(n*Frefernce) (dBc) note 3			REFERENCE SPURIOUS @Fcarrier 1935MHz+(n*Frefernce) (dBc) note 3		
	n	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C
-5	-127.03	-118.61	-123.07	-126.96	-125.18	-123.96	-121.18	-122.56	-123.46
-4	-128.45	-127.61	-130.40	-126.39	-128.62	-127.31	-127.78	-123.55	-129.30
-3	-125.40	-128.69	-121.98	-124.05	-120.44	-123.58	-123.36	-126.23	-126.89
-2	-121.95	-123.07	-120.92	-118.65	-120.73	-119.91	-120.21	-122.44	-120.22
-1	-115.36	-117.51	-125.06	-115.83	-118.40	-121.43	-113.67	-118.45	-120.57
0 ^{note 4}	-	-	-	-	-	-	-	-	-
+1	-107.16	-116.41	-110.39	-108.87	-118.79	-111.42	-107.66	-114.22	-111.26
+2	-123.76	-124.07	-122.60	-125.41	-123.21	-122.41	-121.67	-119.32	-120.86
+3	-128.22	-121.25	-130.56	-128.32	-121.88	-128.37	-126.88	-123.83	-128.29
+4	-124.32	-126.47	-131.29	-127.68	-127.66	-128.71	-123.75	-126.37	-126.62
+5	-124.85	-123.36	-121.98	-122.68	-121.72	-118.91	-121.78	-123.19	-120.46

Note 3: Reference frequency 20 MHz


Note 4: All spurs are referenced to carrier signal (n=0).

Typical Performance Curves


OUTPUT POWER Vs FREQUENCY

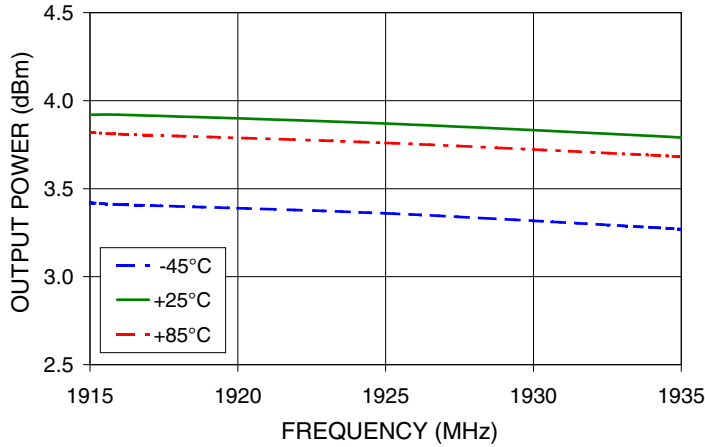

2nd HARMONIC Vs FREQUENCY

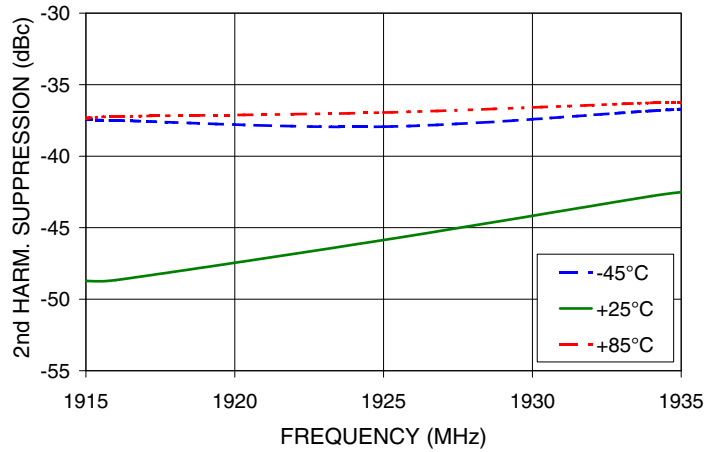






3rd HARMONIC Vs FREQUENCY

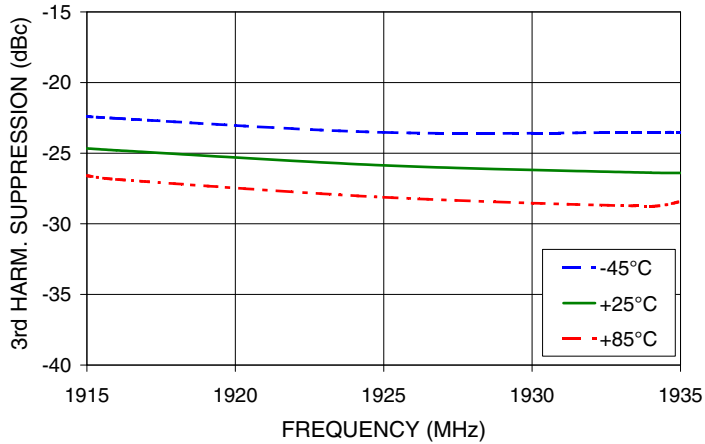

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661







Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

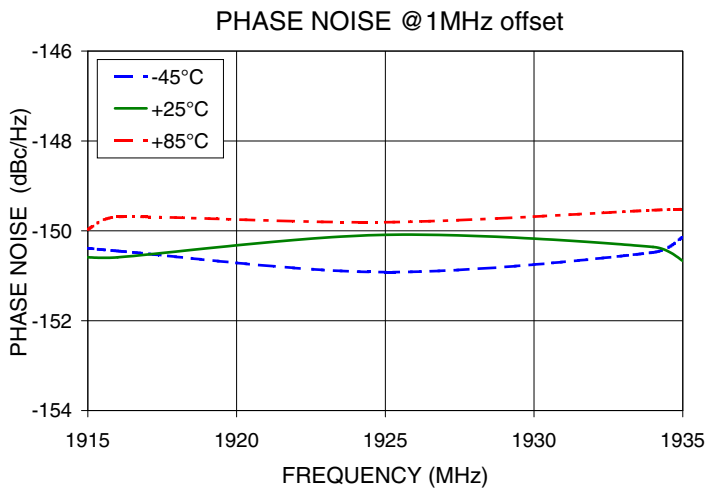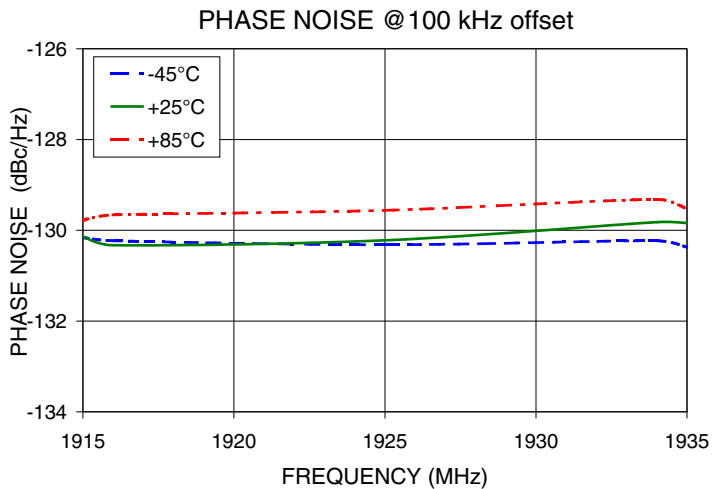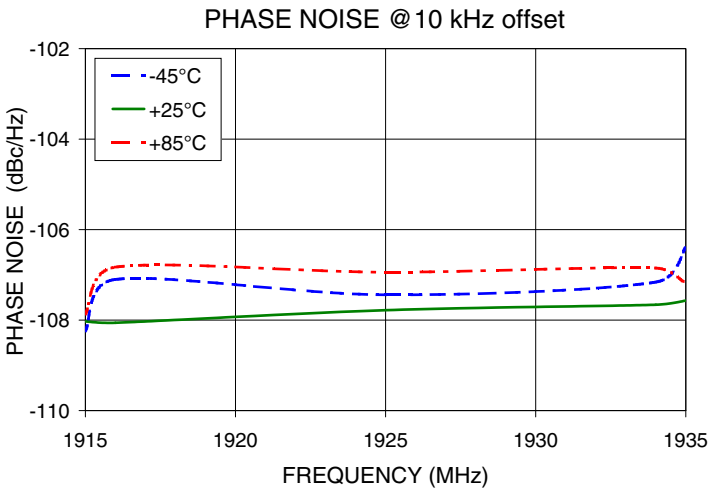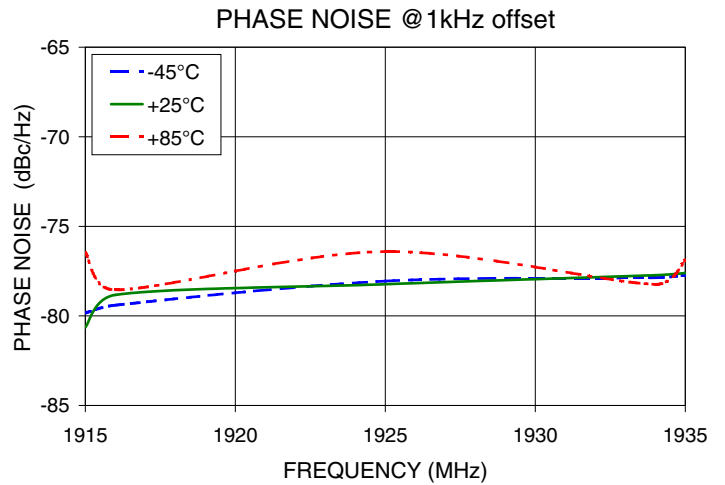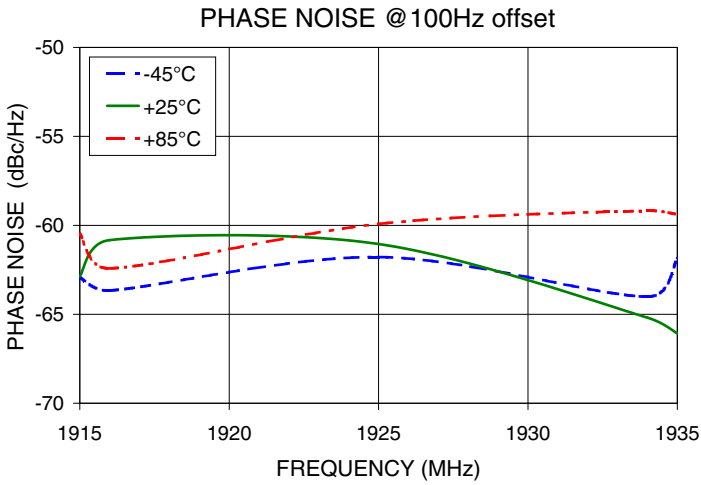

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

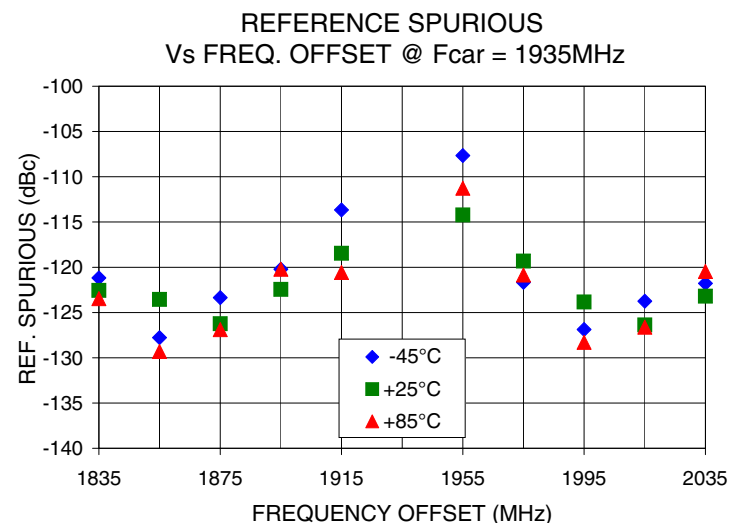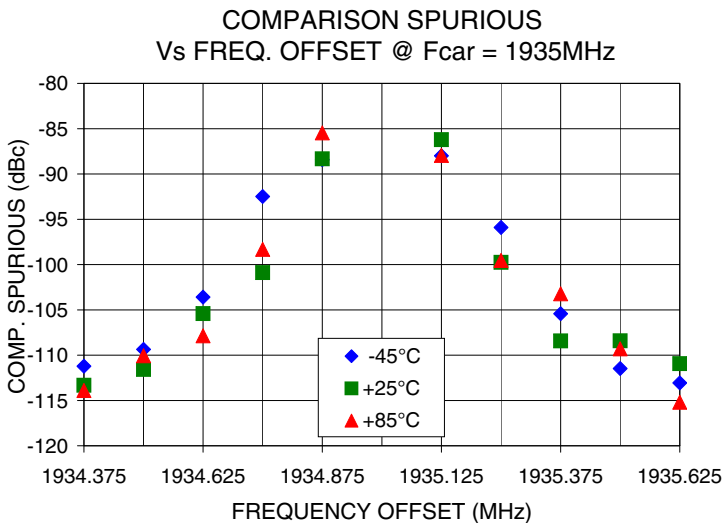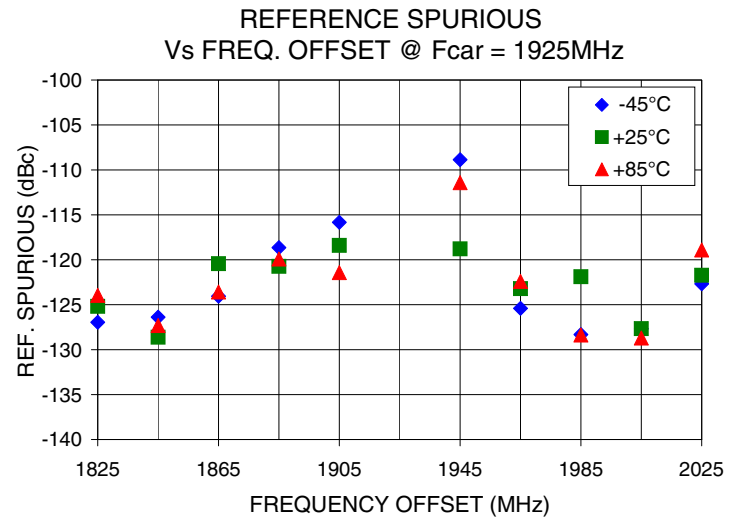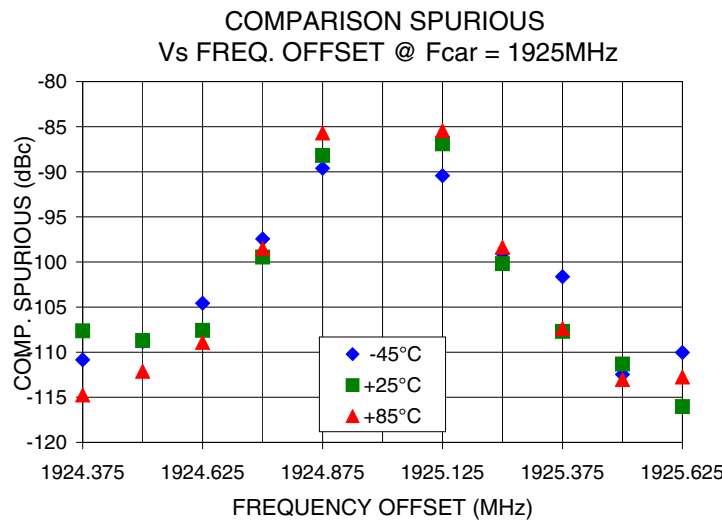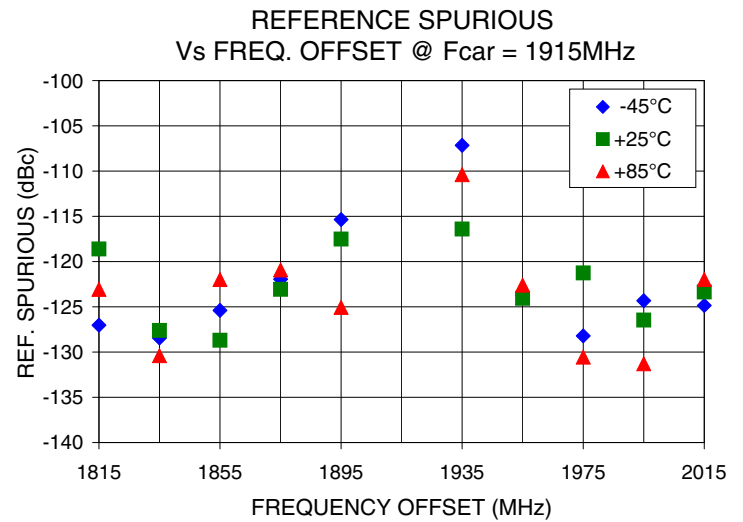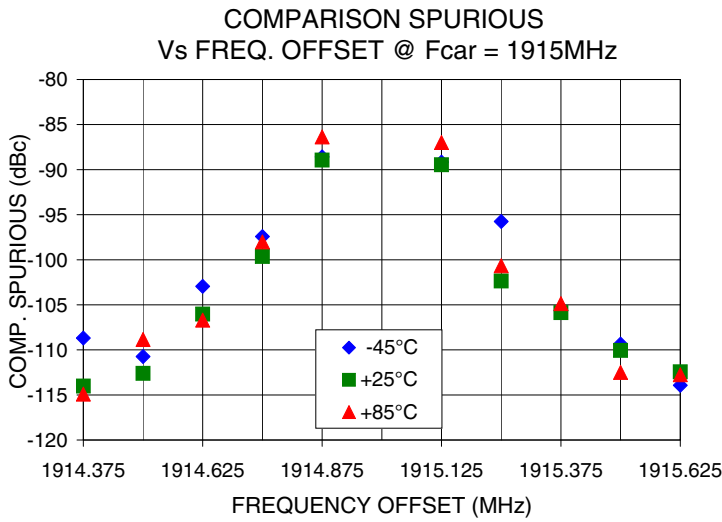


For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Pin Configuration

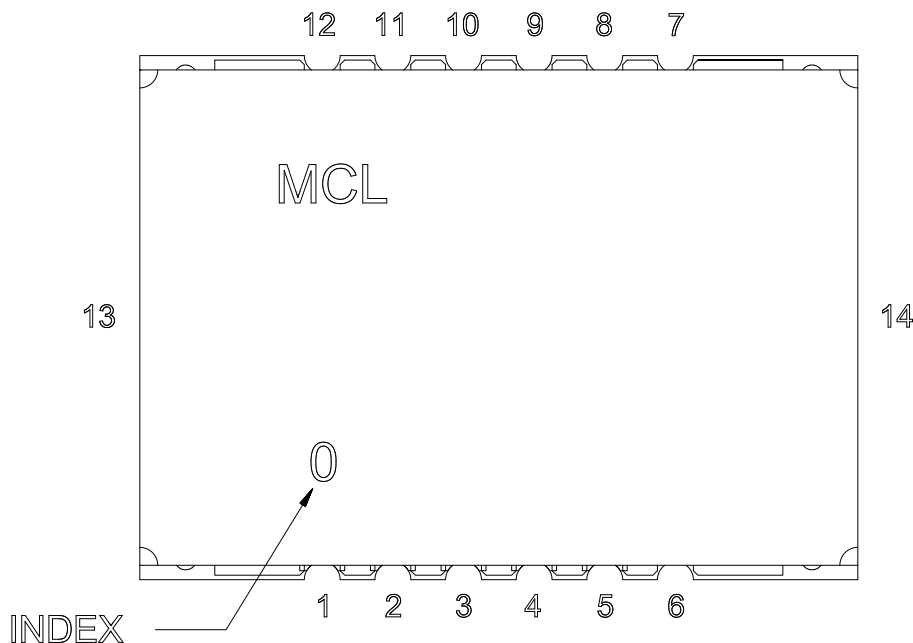


Pin Connection


Pin Number	Function
1	VCC PLL
2	GND
3	REF IN
4	GND
5	VCC VCO
6	GND
7	RF OUT
8	GND
9	LOCK DET
10	CLOCK
11	DATA
12	LE
13	GND
14	GND

Recommended Application Circuit

Note: REF IN and RF OUT ports are internally AC coupled.

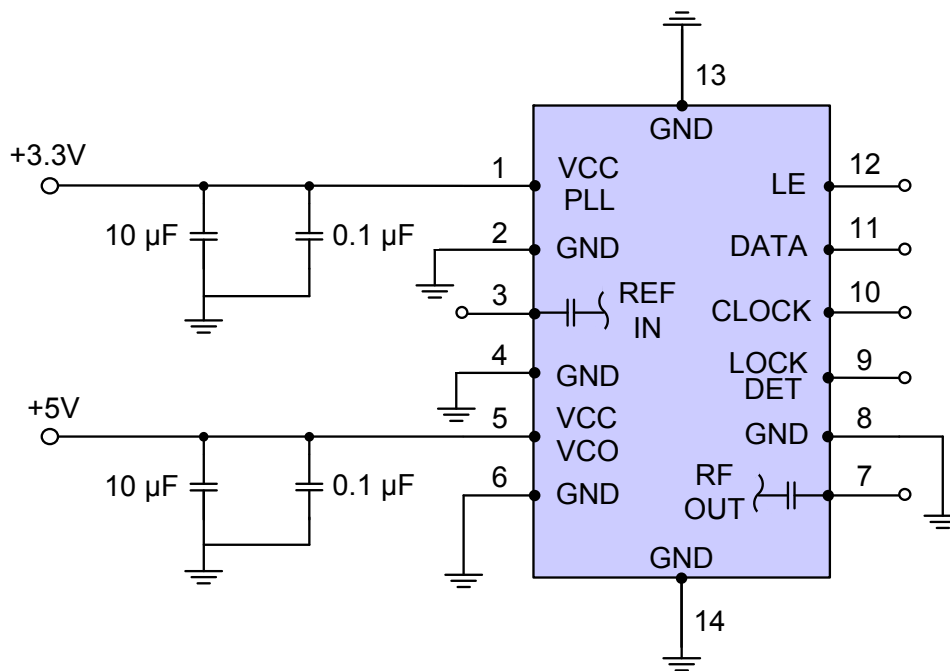

Device Marking

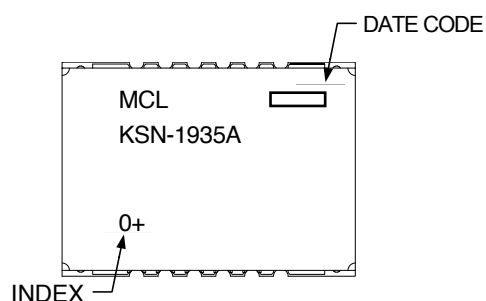**Additional Detailed Technical Information**

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Case Style: DK1042

Tape & Reel: TR-F28

Suggested Layout for PCB Design: PL-249

Evaluation Board: TB-567-1+

Environment Ratings: ENV03T2