

# Frequency Synthesizer

ZSN-7800A+

50Ω 7600 to 7800 MHz

## The Big Deal

- Low phase noise and spurious
- Fast settling time, 50μs Max
- Robust design and construction
- Frequency modulation capability
- Size 2.75" x 1.96" x 0.62"



CASE STYLE: KF1336

## Product Overview

The ZSN-7800A+ is a Frequency Synthesizer, designed to operate from 7600 to 7800MHz for military application. The ZSN-7800A+ is packaged in a coaxial package (size of 2.75" x 1.96" x 0.62") to shield against unwanted signals and noise.

## Key Features

Feature	Advantages
Low phase noise and spurious: <ul style="list-style-type: none"><li>• Phase noise: -88 dBc/Hz typ. @ 10 kHz offset</li><li>• Comparison spurious: -66 dBc typ.</li><li>• Reference spurious: -86 dBc typ.</li></ul>	Low phase noise and spurious improve system EVM (Error Vector Magnitude).
Fast settling time	Less than 50μ sec Max, can be used for fast settling applications.
Frequency Modulation	Modulation frequency from 100 Hz to 1kHz @ modulation voltage from 0.3V to 3.0V
Robust design and construction	To enhance the robustness of ZSN-7800A+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

- Fast settling time, 50 $\mu$ s Max
- High reliability over temperature changes
- Robust design and construction
- Operating voltage (VCC =+12V)
- Case size 2.75" x 1.96" x 0.62"
- Frequency modulation capability



Connectors	Model	Price	Qty.
<b>SMA Female</b>	ZSN-7800A+	\$294.95 ea.	(1-9)

- Military

The ZSN-7800A+ is a Frequency Synthesizer, designed to operate from 7600 to 7800 MHz for military application. The ZSN-7800A+ is packaged in a coaxial package (size of 2.75" x 1.96" x 0.62") to shield against unwanted signals and noise. To enhance the robustness of ZSN-7800A+, each internal component is secured to the substrate with chip bonder, thereby eliminating the risk of tombstoning during subsequent solder reflow operations by the customer.

+ RoHS compliant in accordance  
with EU Directive (2002/95/EC)

*The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.*

MODULATION

REF In

$F_{REF}$  XTAL (Internal)

1/R R COUNTER

$K\phi$  Phase Detector / Charge Pump

1/N N COUNTER

PLL

LE DATA CLOCK LOCK DET VCC PLL

VP

CP

LOOP FILTER

$V_t$

VCO

RFinA

SPLITTER

x2

RF Out

GND VCC



**IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED**  RoHS compliant  
P.O. Box 350166 Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



**Mini-Circuit** The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see [www.minicircuits.com](http://www.minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCStore/terms\\_iso](http://www.minicircuits.com/MCStore/terms_iso).



REV. A  
M130287  
EDR-9891/2F1  
ZSN-7800A+  
Category-U28  
RAV  
110119  
Page 2 of 11

**Electrical Specifications** (over operating temperature -40°C to +85°C)

Parameters	Test Conditions	Min.	Typ.	Max.	Units
Frequency Range	-	7600	-	7800	MHz
Step Size	-	-	10	-	MHz
Settling Time	Within $\pm 1$ kHz	-	0.02	0.05	mSec
Frequency Stability	-	-	$\pm 55$	-	kHz
Output Power	-	+7.0	+10.0	+13.0	dBm
SSB Phase Noise	@ 100 Hz offset	-	-60	-	dBc/Hz
	@ 1 kHz offset	-	-82	-75	
	@ 10 kHz offset	-	-87	-82	
	@ 100 kHz offset	-	-83	-78	
	@ 1 MHz offset	-	-116	-111	
Integrated SSB Phase Noise	@ 100Hz to 1MHz	-	-32	-	dBc
Reference Spurious Suppression	Ref. Freq. 20 MHz	-	-86	-75	dBc
Comparison Spurious Suppression	Step Size 5 MHz	-	-66	-55	
Non - Harmonic Spurious Suppression	-	-	-90	-	
F0.5 & F1.5 & F2 Harmonic Suppression	-	-	-50	-33	
F2.5 & F3 Harmonic Suppression	-	-	-27	-15	dBc
VCC Power Supply	+12.00	+11.75	+12.00	+12.25	V
VCC Supply Current	-	-	226	250	mA
Frequency Modulation (see table below)	-	-	100-1000	-	Hz
Modulation Voltage (see table below)	-	+0.3 $\pm$ 0.05	-	+3.0 $\pm$ 0.05	V
Reference Input (Internal)	Frequency	20 (square wave)	-	20	MHz
	Amplitude	1	-	1	V <sub>P-P</sub>
	Input impedance	-	-	100	K $\Omega$
	Phase Noise @ 1 kHz offset	-	-	-135	dBc/Hz
RF Output port Impedance	-	-	50	-	$\Omega$
Input Logic Level	Input high voltage	-	2.60	-	V
	Input low voltage	-	-	0.60	V
Digital Lock Detect	Locked	-	2.60	-	V
	Unlocked	-	-	0.40	V
Frequency Synthesizer PLL	-	ADF4106			
PLL Programming	-	3-wire serial 3.12V CMOS			
Register Map @ 7800 MHz	F_Register	-	(MSB) 10111111000000010010011 (LSB)		
	N_Register	-	(MSB) 1000000011000000110001 (LSB)		
	R_Register	-	(MSB) 10000000000000010000 (LSB)		

**Frequency Deviation From Carrier Vs Modulation Voltage**

TYPICAL FREQUENCY DEVIATION FROM CARRIER (F <sub>carrier</sub> : 7600 MHz) (Hz)	MODULATION VOLTAGE (V)	TYPICAL FREQUENCY DEVIATION FROM CARRIER (F <sub>carrier</sub> : 7600 MHz) (Hz)	MODULATION VOLTAGE (V)
0	0	600	1.8
100	0.3	700	2.1
200	0.6	800	2.4
300	0.9	900	2.7
400	1.2	1000	3.0
500	1.5	-	-

The frequency decreases as the modulation voltage increases.

**Absolute Maximum Ratings**

Parameters	Ratings
Supply Voltage	13V
Data, Clock, LE Levels	-0.3Vmin, +3.3Vmax
Modulation Levels	-0.5Vmin, +4Vmax
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

Permanent damage may occur if any of these limits are exceeded



**The Design Engineers Search Engine** finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCStore/terms.jsp](http://www.minicircuits.com/MCStore/terms.jsp).

## Typical Performance Data

FREQUENCY (MHz)	POWER OUTPUT (dBm)			VCO CURRENT (mA)		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
7600	9.09	9.99	9.39	224.49	225.83	227.04
7620	9.10	10.16	9.57	224.72	226.08	227.23
7660	9.10	10.08	9.48	225.02	226.38	227.47
7700	9.10	9.21	8.68	225.13	226.55	227.53
7740	9.11	9.62	9.23	225.33	226.76	227.69
7780	9.11	8.91	8.67	225.56	226.97	227.81
7800	9.11	8.63	8.42	225.66	227.09	227.87

FREQUENCY (MHz)	HARMONICS (dBc)								
	F0.5			F1.5			F2		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
7600	-47.57	-48.84	-48.98	-41.29	-45.43	-48.63	-58.61	-70.69	-70.39
7620	-48.05	-49.11	-49.09	-42.29	-46.42	-49.31	-59.07	-70.52	-70.52
7660	-48.40	-49.87	-49.89	-41.52	-46.44	-49.77	-58.97	-70.94	-70.87
7700	-47.69	-49.09	-49.43	-41.41	-46.16	-49.21	-59.99	-70.50	-68.18
7740	-48.06	-49.47	-49.57	-40.22	-45.10	-48.24	-60.36	-71.26	-70.65
7780	-47.29	-48.91	-49.57	-40.02	-44.76	-48.02	-59.66	-69.28	-67.50
7800	-46.61	-48.45	-49.13	-39.76	-44.76	-48.20	-57.61	-69.54	-66.02

FREQUENCY (MHz)	HARMONICS (dBc)					
	F2.5			F3		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
7600	-39.16	-42.88	-46.33	-39.04	-45.87	-49.16
7620	-38.96	-42.73	-46.26	-38.02	-44.58	-48.33
7660	-39.60	-42.89	-46.03	-37.45	-44.61	-49.35
7700	-37.86	-41.64	-44.64	-35.67	-42.54	-47.98
7740	-37.46	-41.53	-44.93	-36.93	-43.86	-48.28
7780	-35.78	-39.85	-43.95	-36.79	-43.63	-49.13
7800	-36.14	-39.75	-43.52	-36.33	-43.47	-48.58



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCStore/terms.jsp](http://www.minicircuits.com/MCStore/terms.jsp).

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @ OFFSETS				
	+25°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
7600	-64.55	-81.23	-86.97	-83.32	-116.79
7620	-65.14	-82.66	-86.89	-83.84	-116.77
7660	-64.58	-83.09	-87.73	-84.17	-116.62
7700	-65.83	-81.96	-87.23	-84.67	-116.30
7740	-62.76	-83.62	-88.29	-85.02	-116.11
7780	-63.47	-82.11	-88.38	-85.48	-116.36
7800	-61.23	-81.76	-89.22	-86.05	-116.57

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @ OFFSETS				
	-45°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
7600	-61.69	-83.77	-87.40	-82.58	-117.20
7620	-64.23	-81.61	-87.35	-82.80	-117.34
7660	-61.18	-83.11	-88.99	-84.03	-117.25
7700	-63.27	-83.06	-89.15	-84.60	-117.62
7740	-61.39	-82.64	-89.09	-84.94	-118.06
7780	-62.36	-81.11	-90.39	-86.71	-116.79
7800	-60.14	-82.80	-91.55	-87.96	-115.65

FREQUENCY (MHz)	PHASE NOISE (dBc/Hz) @ OFFSETS				
	+85°C				
	100Hz	1kHz	10kHz	100kHz	1MHz
7600	-56.71	-79.16	-85.95	-82.12	-116.06
7620	-57.91	-80.27	-85.89	-82.46	-115.80
7660	-58.11	-78.87	-86.16	-83.29	-114.67
7700	-58.63	-78.07	-86.79	-83.64	-114.52
7740	-57.14	-77.99	-87.40	-83.70	-115.27
7780	-58.32	-78.20	-87.08	-83.39	-116.53
7800	-57.21	-78.83	-87.47	-84.02	-116.69



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCStore/terms.jsp](http://www.minicircuits.com/MCStore/terms.jsp).

Modulation Voltage [V]	+25°C	
	Carrier	Frequency deviation
	Frequency [MHz]	from carrier [Hz]
0	7600.027866	0 (REF)
0.3	7600.027747	119
0.6	7600.027646	220
0.9	7600.027539	327
1.2	7600.027424	442
1.5	7600.027316	550
1.8	7600.027209	657
2.1	7600.027097	769
2.4	7600.026998	868
2.7	7600.026880	986
3.0	7600.026773	1093

Modulation Voltage [V]	-45°C	
	Carrier	Frequency deviation
	Frequency [MHz]	from carrier [Hz]
0	7600.035090	0 (REF)
0.3	7600.034979	111
0.6	7600.034882	208
0.9	7600.034834	256
1.2	7600.034756	334
1.5	7600.034646	444
1.8	7600.034546	544
2.1	7600.034380	710
2.4	7600.034333	757
2.7	7600.034247	843
3.0	7600.034150	940

Modulation Voltage [V]	+85°C	
	Carrier	Frequency deviation
	Frequency [MHz]	from carrier [Hz]
0	7600.047657	0 (REF)
0.3	7600.047462	195
0.6	7600.047376	281
0.9	7600.047290	367
1.2	7600.047210	447
1.5	7600.047139	518
1.8	7600.047051	606
2.1	7600.046964	693
2.4	7600.046879	778
2.7	7600.046797	860
3.0	7600.046666	991



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661



The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCStore/terms.jsp](http://www.minicircuits.com/MCStore/terms.jsp).

COMPARISON SPURIOUS ORDER	COMPARISON SPURIOUS @ Fcarrier 7600MHz+(n*Freference) (dBc) note 1			COMPARISON SPURIOUS @ Fcarrier 7700MHz+(n*Freference) (dBc) note 1			COMPARISON SPURIOUS @ Fcarrier 7800MHz+(n*Freference) (dBc) note 1		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
-5	-102.93	-104.06	-104.07	-98.78	-114.43	-105.60	-96.64	-97.94	-99.01
-4	-86.81	-92.56	-96.73	-83.42	-86.62	-87.40	-81.02	-80.90	-80.16
-3	-90.73	-90.52	-90.43	-114.49	-102.93	-113.29	-94.93	-90.63	-89.00
-2	-81.11	-81.79	-82.39	-92.51	-93.52	-107.97	-90.45	-83.35	-80.40
-1	-66.46	-67.71	-68.67	-74.32	-79.00	-87.75	-80.10	-70.66	-66.67
0 <sup>note 2</sup>	-	-	-	-	-	-	-	-	-
+1	-66.59	-67.75	-68.50	-74.39	-78.74	-87.61	-80.19	-70.84	-66.87
+2	-81.31	-81.72	-82.51	-91.58	-93.96	-109.41	-90.37	-84.06	-80.58
+3	-91.37	-90.79	-90.62	-106.55	-105.75	-113.60	-95.52	-91.29	-89.51
+4	-85.09	-91.43	-103.77	-84.69	-89.84	-90.54	-86.83	-84.29	-82.26
+5	-100.27	-101.81	-105.90	-97.12	-108.88	-104.96	-97.67	-98.78	-100.29

Note 1: Comparison frequency 5 MHz

Note 2: All spurs are referenced to carrier signal (n=0).

REFERENCE SPURIOUS ORDER	REFERENCE SPURIOUS @ Fcarrier 7600MHz+(n*Fcomparison) (dBc) note 3			REFERENCE SPURIOUS @ Fcarrier 7700MHz+(n*Fcomparison) (dBc) note 3			REFERENCE SPURIOUS @ Fcarrier 7800MHz+(n*Fcomparison) (dBc) note 3		
	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C	-45°C	+25°C	+85°C
-5	-95.19	-100.81	-106.25	-100.00	-104.02	-119.60	-98.54	-104.17	-106.51
-4	-93.59	-97.75	-104.76	-97.69	-101.64	-104.47	-96.57	-98.41	-100.04
-3	-96.48	-102.75	-103.27	-92.11	-100.83	-96.16	-91.42	-91.48	-92.78
-2	-93.61	-94.80	-95.41	-88.83	-92.80	-90.04	-87.11	-87.89	-88.07
-1	-86.08	-92.03	-97.73	-82.79	-86.52	-86.22	-80.94	-81.02	-80.22
0 <sup>note 4</sup>	-	-	-	-	-	-	-	-	-
+1	-84.63	-91.13	-104.00	-83.77	-89.56	-88.61	-86.64	-84.27	-82.34
+2	-92.75	-94.96	-96.18	-89.25	-93.43	-90.52	-88.44	-88.58	-88.76
+3	-95.19	-101.92	-102.67	-95.16	-102.24	-97.00	-93.55	-91.76	-93.19
+4	-93.19	-97.12	-100.33	-93.14	-98.53	-99.15	-89.82	-93.27	-96.78
+5	-95.80	-101.26	-112.82	-96.41	-104.28	-109.13	-93.62	-100.43	-108.30

Note 3: Reference frequency 20 MHz

Note 4: All spurs are referenced to carrier signal (n=0).



IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs &amp; shopping online see




Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCStore/terms.jsp](http://www.minicircuits.com/MCStore/terms.jsp).

## Typical Performance Curves


OUTPUT POWER Vs FREQUENCY

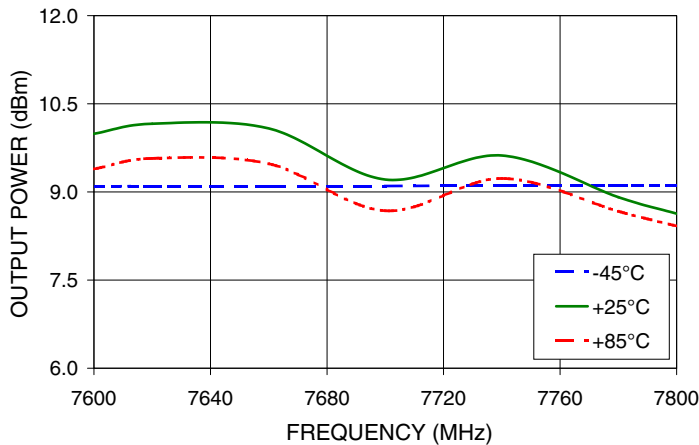


0.5 HARMONIC Vs FREQUENCY

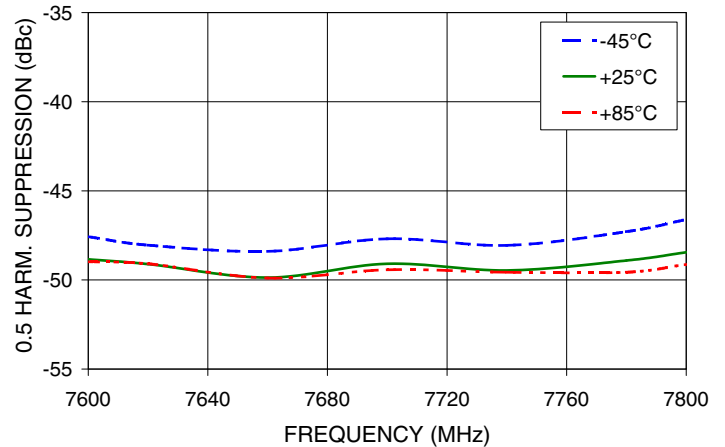


1.5 HARMONIC Vs FREQUENCY

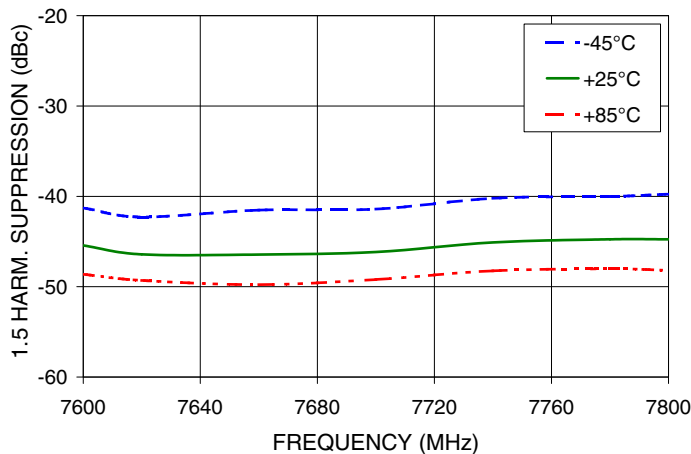


2nd HARMONIC Vs FREQUENCY

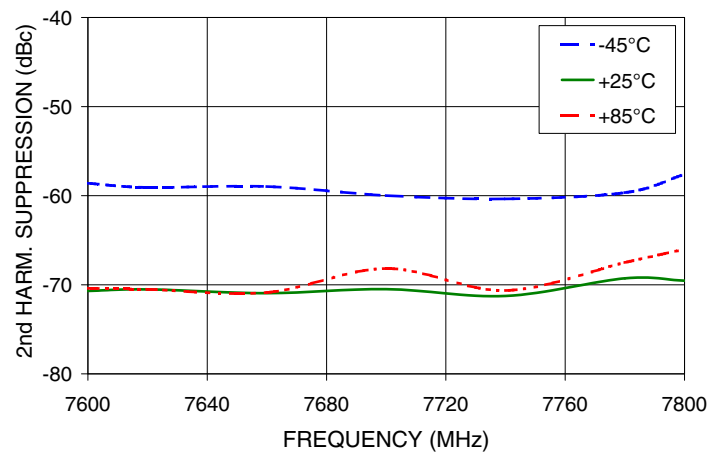

2.5 HARMONIC Vs FREQUENCY

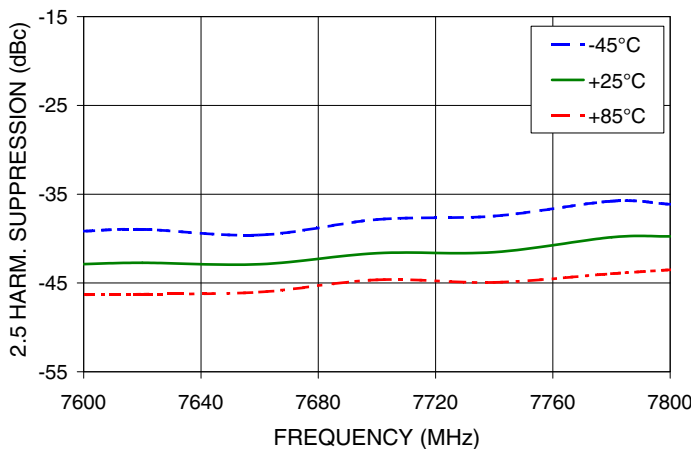

3rd HARMONIC Vs FREQUENCY

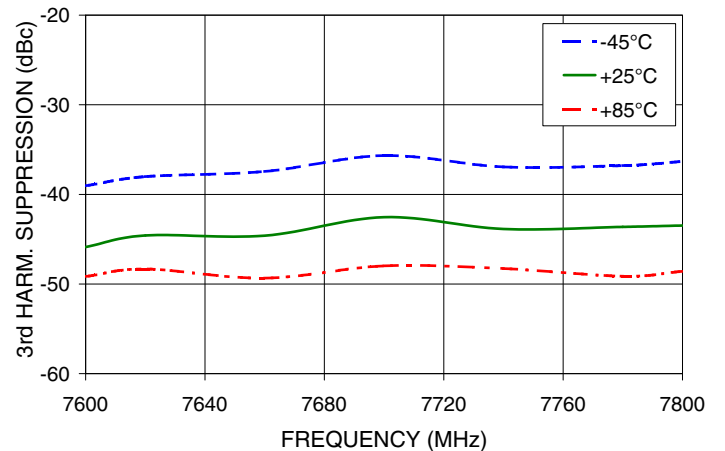

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see




Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).




PHASE NOISE @ 100Hz offset

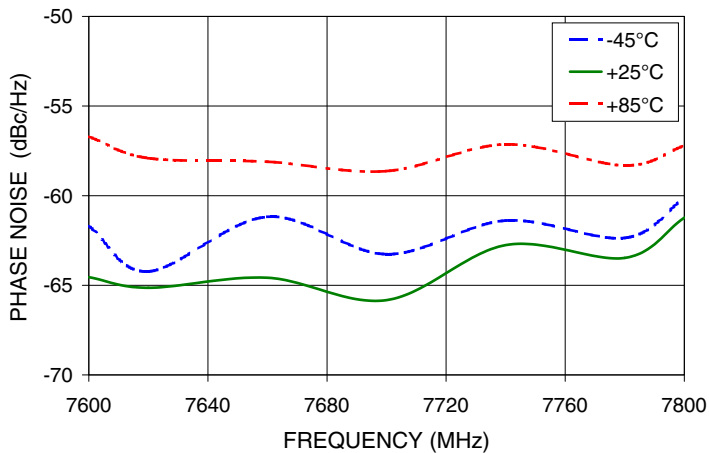


PHASE NOISE @ 1kHz offset

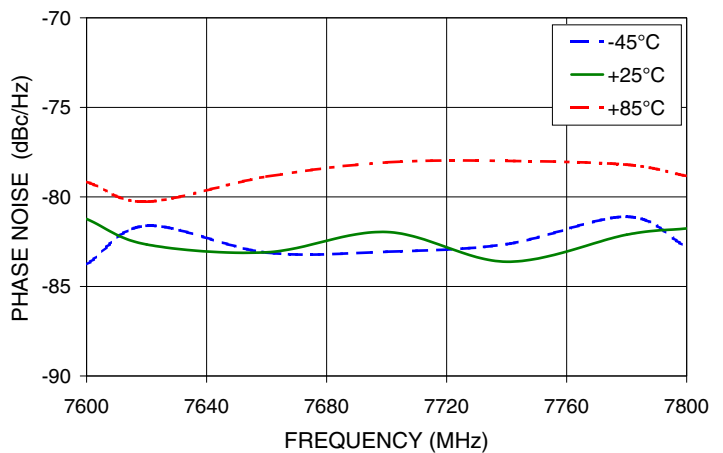


PHASE NOISE @ 10 kHz offset

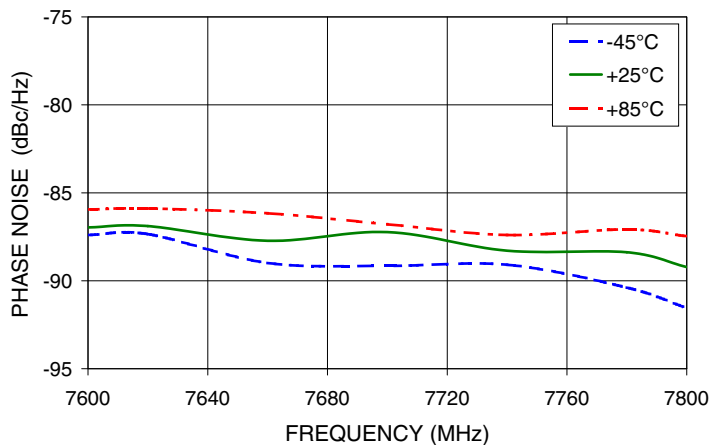

PHASE NOISE @ 100 kHz offset

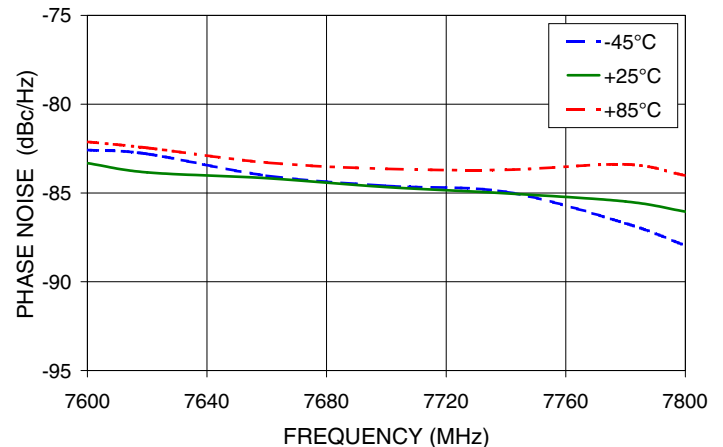

PHASE NOISE @ 1MHz offset

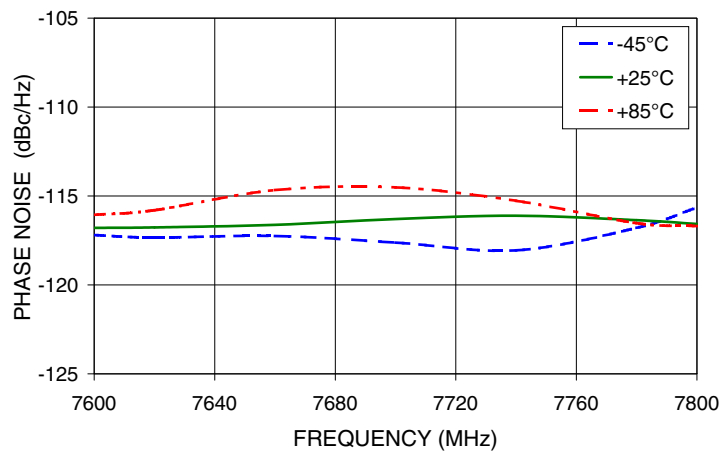


IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCStore/terms.jsp](http://www.minicircuits.com/MCStore/terms.jsp).


COMPARISON SPURIOUS  
Vs FREQ. OFFSET @ Fcar = 7600MHz

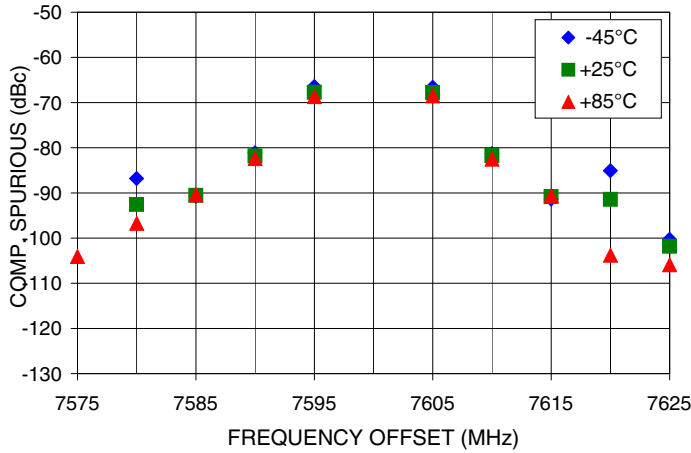


REFERENCE SPURIOUS  
Vs FREQ. OFFSET @ Fcar = 7600MHz

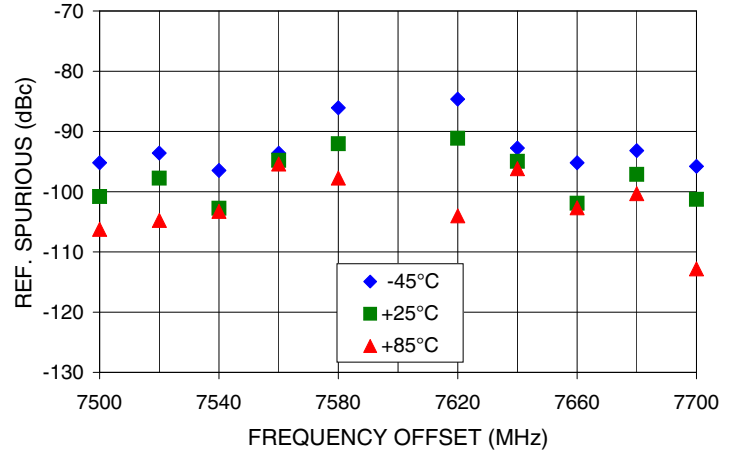


COMPARISON SPURIOUS  
Vs FREQ. OFFSET @ Fcar = 7700MHz

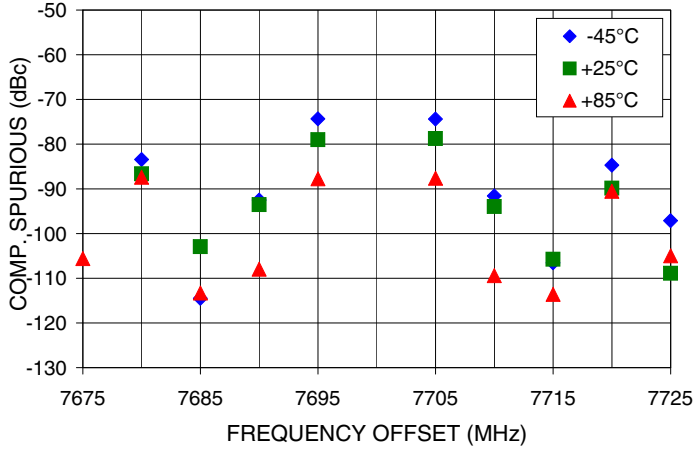


REFERENCE SPURIOUS  
Vs FREQ. OFFSET @ Fcar = 7700MHz

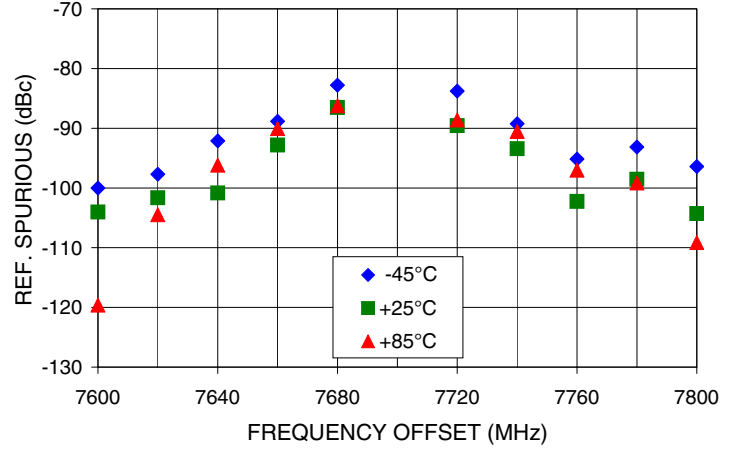

COMPARISON SPURIOUS  
Vs FREQ. OFFSET @ Fcar = 7800MHz

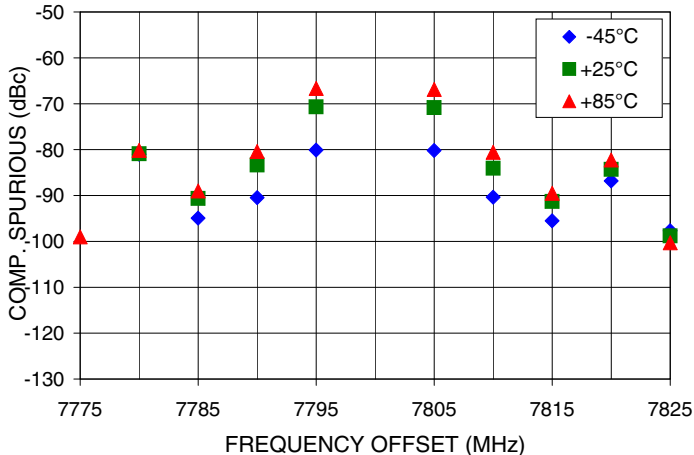

REFERENCE SPURIOUS  
Vs FREQ. OFFSET @ Fcar = 7800MHz

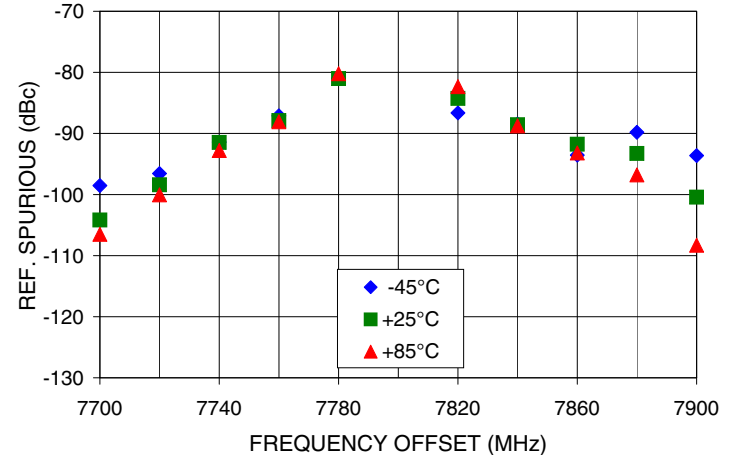

IF/RF MICROWAVE COMPONENTS • ISO 9001 ISO 14001 AS9100 CERTIFIED RoHS compliant  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661




The Design Engineers Search Engine finds the model you need, Instantly • For detailed performance specs & shopping online see



Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

Connectors Configuration

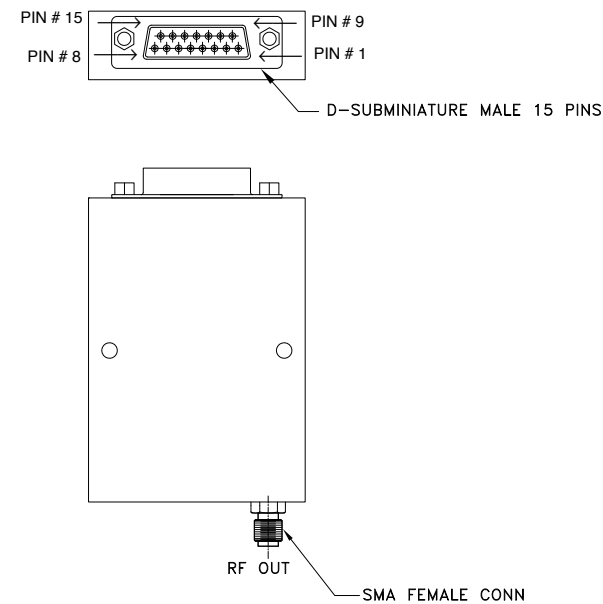

D-SUBMINIATURE MALE 15 PINS Connection

Pin Number	Function
1	GND
2	MODULATION
3	GND
4	LOCK DET
5	LE
6	DATA
7	CLOCK
8	VCC
9	GND
10	GND
11	GND
12	GND
13	GND
14	GND
15	GND

Additional Detailed Technical Information

Additional information is available on our web site. To access this information enter the model number on our web site home page.

Case Style: KF1336

Tape & Reel: N.A.

Suggested Layout for PCB Design: N.A.

Evaluation Board: N.A.

Environment Ratings: ENV48

