

SILICON SWITCHING NPN TRANSISTOR

2N2222AC3A, 2N2222AC3B 2N2222AC3C

- High Speed Saturated Switching
- Hermetic LCC3 Ceramic package.
- Variant B to MIL-PRF-19500/255 outline
- Screening Options Available



ABSOLUTE MAXIMUM RATINGS (T_A = 25°C unless otherwise stated)

V _{CBO}	Collector – Base Voltage	75V
V _{CEO}	Collector – Emitter Voltage	50V
V _{EBO}	Emitter – Base Voltage	6V
I _C	Continuous Collector Current	0.8A
P _D	Total Power Dissipation at T _A = 25°C Derate Above 25°C	500mW 2.86mW/°C
T _J	Junction Temperature Range	-65 to +200°C
T _{stg}	Storage Temperature Range	-65 to +200°C

THERMAL PROPERTIES

Symbols	Parameters	Max.	Units
R _{θJA} ⁽¹⁾	Thermal Resistance, Junction To Ambient	325	°C/W
R _{θJSP(1S)} ⁽²⁾	Thermal Resistance Junction to Solder Pads	110	°C/W

⁽¹⁾ For non-thermal conductive PCB or unknown PCB surface mount conditions in free air.

⁽²⁾ Infinite sink mount to PCB.

Semelab Limited reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

Semelab Limited

Coventry Road, Lutterworth, Leicestershire, LE17 4JB

Telephone +44 (0) 1455 556565

Fax +44 (0) 1455 552612

Email: sales@semelab-tt.com

Website: <http://www.semelab-tt.com>



A subsidiary of
TT electronics plc.

Document Number 9192

Issue 1

Page 1 of 3

SILICON SWITCHING NPN TRANSISTOR

2N2222AC3A 2N2222AC3B 2N2222AC3C

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise stated)

Symbols	Parameters	Test Conditions	Min.	Typ.	Max.	Units
$V_{(BR)CEO}^{(1)}$	Collector-Emitter Sustaining Voltage	$I_C = 10\text{mA}$ $I_B = 0$	50			V
I_{CES}	Collector-Emitter Cut-Off Current	$V_{CE} = 50\text{V}$			50	nA
I_{CBO}	Collector-Base Cut-Off Current	$I_E = 0$ $V_{CB} = 75\text{V}$			10	μA
		$I_E = 0$ $V_{CB} = 60\text{V}$			10	nA
		$T_A = 150^\circ\text{C}$			10	μA
I_{EBO}	Emitter Cut-Off Current	$I_C = 0$ $V_{EB} = 4\text{V}$			10	nA
		$V_{EB} = 6\text{V}$			10	μA

ON CHARACTERISTICS

$V_{CE(\text{Sat})}^{(1)}$	Collector-Emitter Saturation Voltage	$I_C = 150\text{mA}$ $I_B = 15\text{mA}$			0.3	V
		$I_C = 500\text{mA}$ $I_B = 50\text{mA}$			1.0	
$V_{BE(\text{Sat})}^{(1)}$	Base-Emitter Saturation Voltage	$I_C = 150\text{mA}$ $I_B = 15\text{mA}$	0.6		1.2	V
		$I_C = 500\text{mA}$ $I_B = 50\text{mA}$			2.0	
h_{FE}	DC Current Gain	$I_C = 0.1\text{mA}$ $V_{CE} = 10\text{V}$	50			-
		$I_C = 1.0\text{mA}$ $V_{CE} = 10\text{V}$	75		325	
		$I_C = 10\text{mA}$ $V_{CE} = 10\text{V}$	100			
		$T_A = -55^\circ\text{C}$	35			
		$I_C = 150\text{mA}$ $V_{CE} = 10\text{V}^{(1)}$	100		300	
		$I_C = 500\text{mA}$ $V_{CE} = 10\text{V}^{(1)}$	30			

SMALL SIGNAL CHARACTERISTICS

C_{obo}	Output Capacitance	$V_{CB} = 10\text{V}$ $I_E = 0$ $f = 1.0\text{MHz}$			8	pF
C_{ibo}	Input Capacitance	$V_{EB} = 0.5\text{V}$ $I_C = 0$ $f = 1.0\text{MHz}$			25	
$ h_{fe} $	Magnitude of small-signal, short-circuit forward current transfer ratio	$I_C = 20\text{mA}$ $V_{CE} = 20\text{V}$ $f = 100\text{MHz}$	2.5			-
h_{fe}	Small Signal Current Gain	$I_C = 1.0\text{mA}$ $V_{CE} = 10\text{V}$ $f = 1.0\text{kHz}$	50			-

Notes

(1) Pulse Width $\leq 300\mu\text{s}$, $\delta \leq 2\%$

SILICON SWITCHING NPN TRANSISTOR


2N2222AC3A 2N2222AC3B 2N2222AC3C

SWITCHING CHARACTERISTICS

Symbols	Parameters	Test Conditions	Min.	Typ.	Max.	Units
t_{on}	Saturated Turn-on Time	$V_{CC} = 30V$ $I_C = 150mA$ $I_B = 15mA$			35	ns
t_{off}	Saturated Turn-off Time				300	

MECHANICAL DATA

Dimensions in mm (inches)

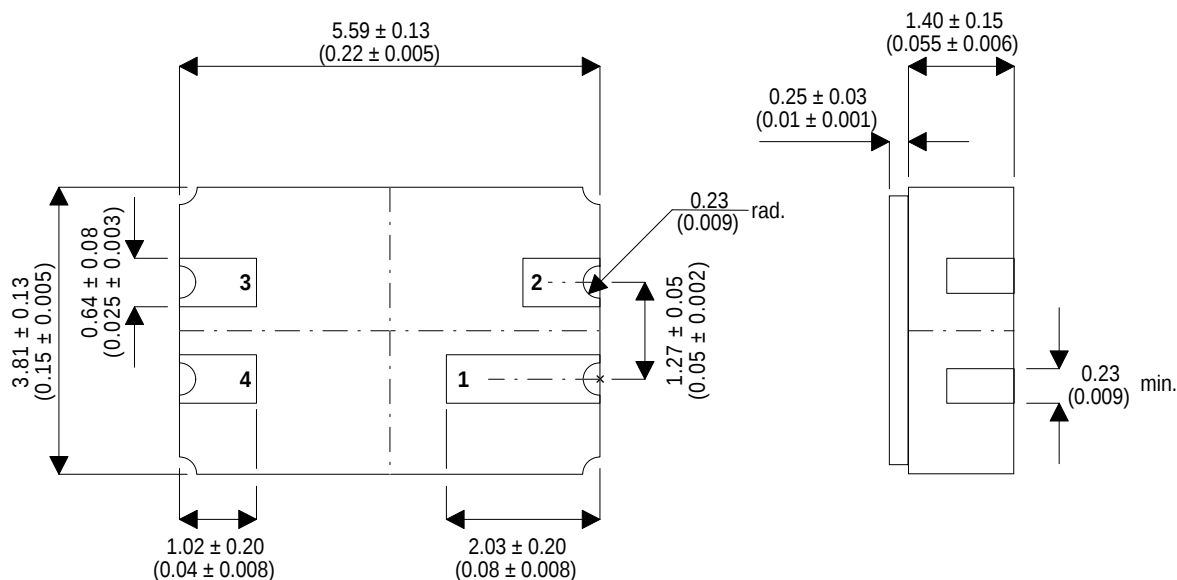

LCC3 (MO-041BA)

Underside View

Package Variant Table

Variant	Pad 1	Pad 2	Pad 3	Pad 4
A	Collector	N/C	Emitter	Base
B	Collector	N/C	Base	Emitter
C	Collector	Emitter	N/C	Base

N/C = No Connection