


600V COMMON CATHODE SILICON CARBIDE (SiC) SCHOTTKY DIODES

SML10SIC06YIC

- Hermetic Metal TO-257AA Package.
- Semelab's Silicon Carbide (SiC) Schottky diodes exhibit low forward voltage and superb high temperature performance.
- Dual Common Cathode 600V SiC Diodes with Isolated Case
- No reverse recovery time due to absence of minority carrier injection.
- Screening Options Available.

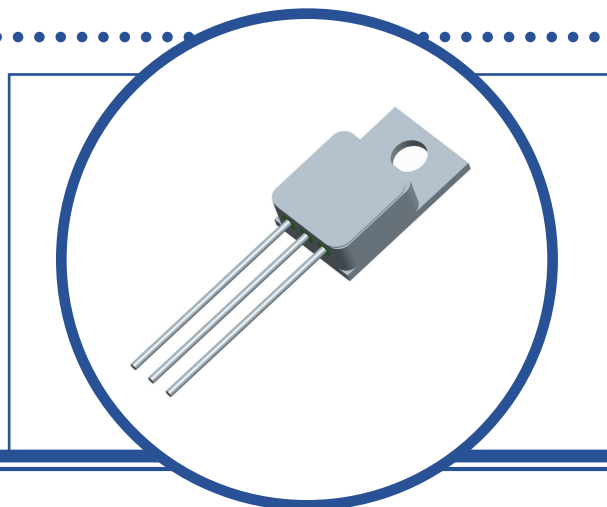

ABSOLUTE MAXIMUM RATINGS (Per Diode, $T_C = 25^\circ\text{C}$ unless otherwise stated)

V_R	DC Reverse Voltage	600V
V_{RRM}	Repetitive Peak Reverse Voltage	600V
I_F	DC Forward Current ($T_J = 175^\circ\text{C}$)	10A
I_{FRM}	Repetitive Peak Forward Current ⁽¹⁾	67A
I_{FSM}	Surge Peak Forward Current ⁽²⁾	250A
P_D	Total Power Dissipation at Derate Above 25°C	75W 0.375W/ $^\circ\text{C}$
T_J	Junction Temperature Range	-55 to $+225^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55 to $+225^\circ\text{C}$

THERMAL PROPERTIES (Each Diode)

Symbols	Parameters	Max.	Units
$R_{\theta JC}$	Thermal Resistance, Junction To Case	2.66	$^\circ\text{C/W}$

Notes

(1) $T_C = 25^\circ\text{C}$, $T_p = 10\text{ms}$, Half Sine Wave, $D = 0.3$

(2) $T_C = 25^\circ\text{C}$, $T_p = 10\mu\text{s}$

Semelab Limited reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

Semelab Limited

Coventry Road, Lutterworth, Leicestershire, LE17 4JB

Telephone +44 (0) 1455 556565

Fax +44 (0) 1455 552612

Email: sales@semelab-tt.com

Website: <http://www.semelab-tt.com>



A subsidiary of
TT electronics plc.

Document Number 9841

Issue 1

Page 1 of 4

600V COMMON CATHODE SILICON CARBIDE (SiC) SCHOTTKY DIODE SML10SIC06YIC

ELECTRICAL CHARACTERISTICS (Per Diode, $T_C = 25^\circ\text{C}$ unless otherwise stated)

Static Characteristics



Symbols	Parameters	Test Conditions	Min.	Typ.	Max.	Units
V_F	Forward Voltage	$I_F = 10\text{A}$		1.5	1.8	V
		$T_J = 175^\circ\text{C}$		2.0	2.4	
I_R	Reverse Current	$V_R = 600\text{V}$		10	50	μA
		$T_J = 175^\circ\text{C}$		20	200	

Dynamic Characteristics

Q_C	Total Capacitive Charge	$V_R = 600\text{V}$, $I_F = 10\text{A}$ $\partial i/\partial t = 500\text{A}/\mu\text{s}$		25		nC
C	Total Capacitance	$V_R = 1.0\text{V}$, $f = 1.0\text{MHz}$		480		pF
		$V_R = 200\text{V}$, $f = 1.0\text{MHz}$		50		
		$V_R = 400\text{V}$, $f = 1.0\text{MHz}$		42		

600V COMMON CATHODE SILICON CARBIDE (SiC) SCHOTTKY DIODE SML10SIC06YIC


Typical Performance Over Temperature Range

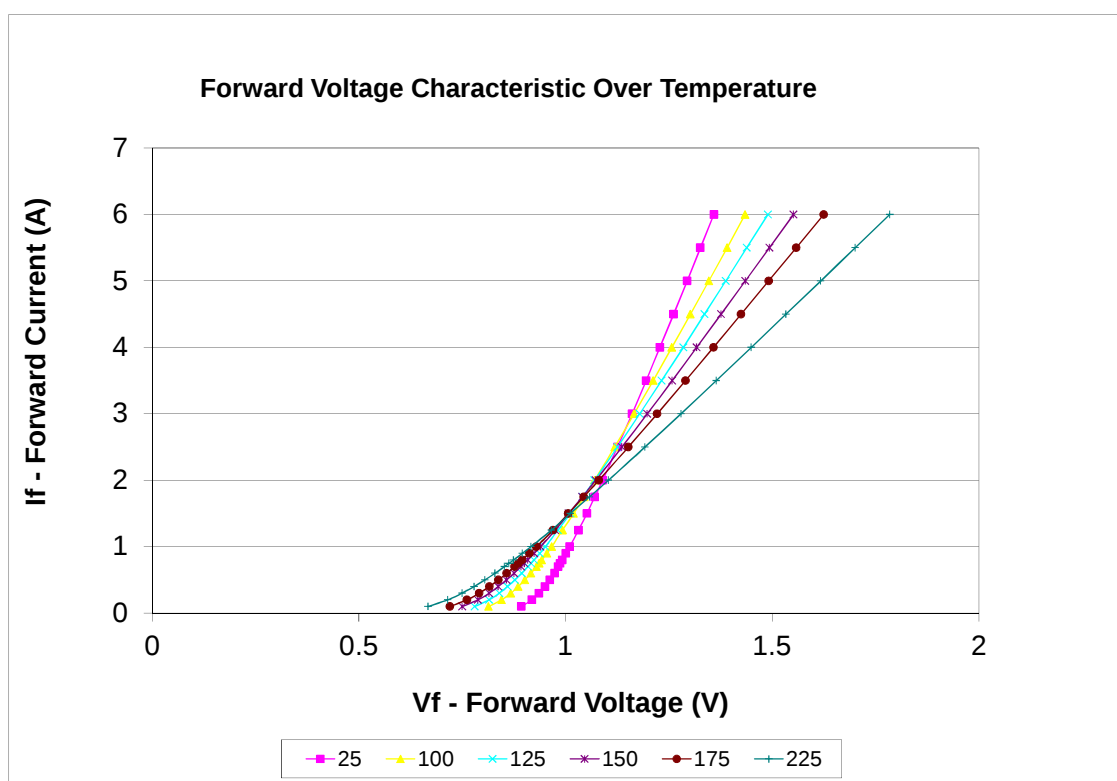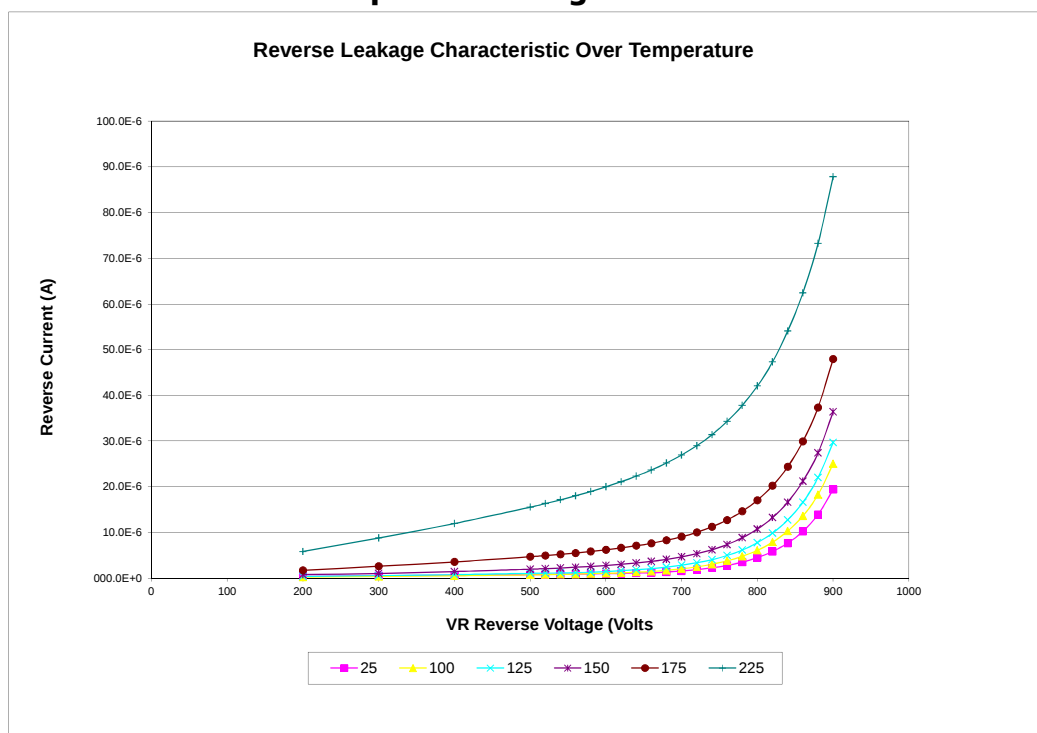

600V COMMON CATHODE SILICON CARBIDE (SiC) SCHOTTKY DIODE SML10SIC06YIC

SiC Schottky Diode, no minority carrier recombination thus zero reverse recovery. Recovery time shown is due to a small junction capacitance charge and is independent of junction temperature

SML10SIC06YC
Equivalent Reverse Recovery Time Device
 $I_F=500\text{mA}$, $I_R = 1\text{A}$, $I_{RR}=250\text{mA}$

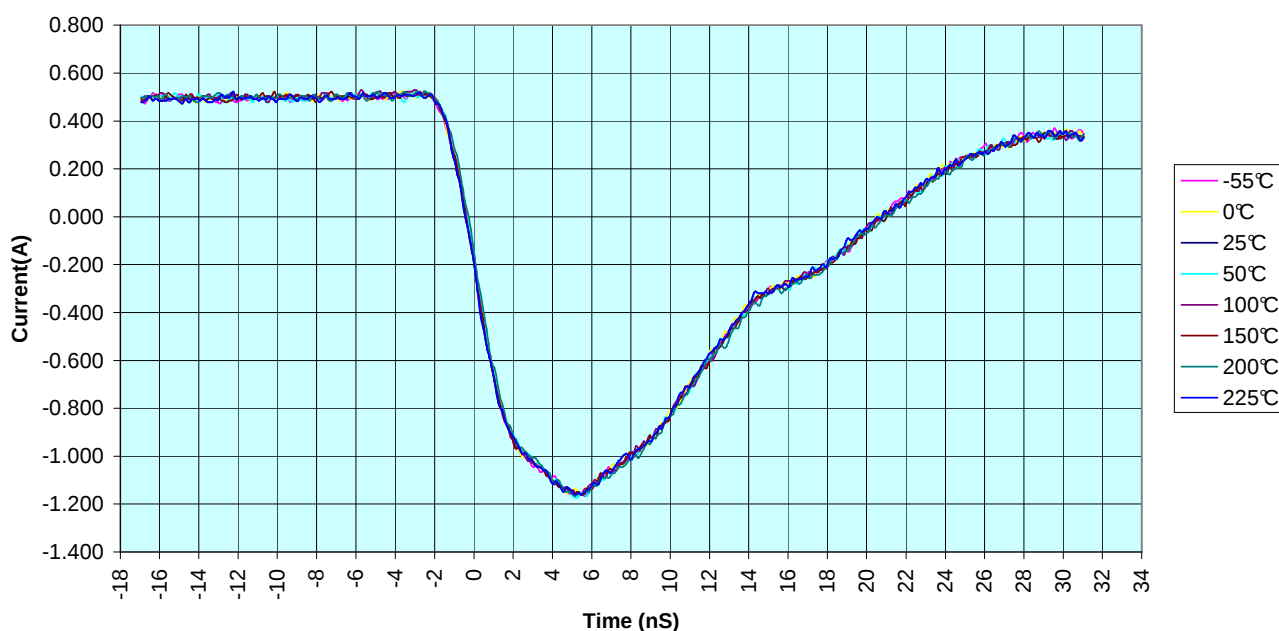

MECHANICAL DATA

Dimensions in mm (inches)

