


POSITIVE ADJUSTABLE VOLTAGE REGULATOR

IP117G / LM117G
IP117AG / LM117AG
IP117HVG / LM117HVG
IP117AHVG / LM117AHVG

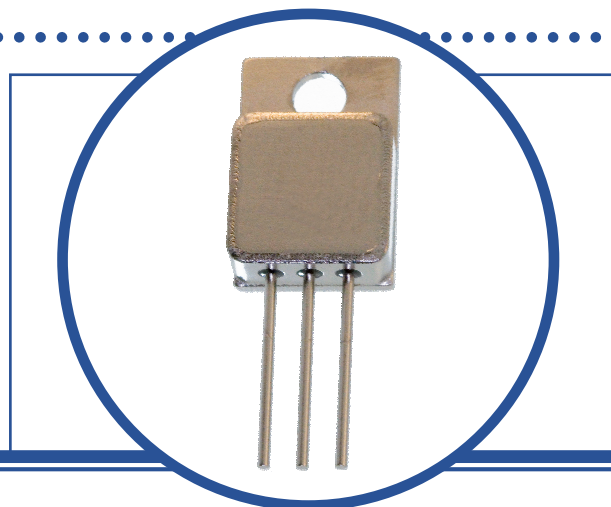

FEATURES

- 1.5A Output Current Guaranteed
- Internal Thermal Overload Protection
- Output Short Circuit Protected
- Hermetic Metal TO-257AA Package
- Screening Options Available

APPLICATIONS

- Adjustable Power Supplies
- System Power Supplies
- Precision Voltage / Current Regulators

DESCRIPTION

The 117 Series regulators are adjustable 3 terminal voltage regulators capable of supplying in excess of 1.5A over an output voltage range of 1.25V to 40V (HV Series, 60V). The regulators are exceptionally easy to apply requiring only 2 external resistors to set the output voltage.

Every effort has been made to make these devices easy to use and difficult to damage. Internal current limiting and power limiting coupled with true thermal limiting prevents damage due to overloads or shorts, even if the regulators are not fastened to a heat sink.

ABSOLUTE MAXIMUM RATINGS (T_C = 25°C unless otherwise stated)

V _I - V _O	Input – Output Voltage Differential	Standard	40V
		HV Series	60V
I _O	Output Current	Internally Limited	
P _D	Power Dissipation	Internally Limited	
T _J	Operating Junction Temperature Range	-55 to +150°C	
T _{stg}	Storage Temperature Range	-65 to +150°C	

THERMAL PROPERTIES

Symbols	Parameters	Min.	Typ.	Max.	Units
R _{θJC}	Thermal Resistance, Junction To Case			5	°C/W

** This datasheet supersedes document 2829

Semelab Limited reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

Semelab Limited

Coventry Road, Lutterworth, Leicestershire, LE17 4JB

Telephone +44 (0) 1455 556565

Fax +44 (0) 1455 552612

Email: sales@semelab-tt.com

Website: <http://www.semelab-tt.com>



A subsidiary of
TT electronics plc.

Document Number 8373

Issue 1

Page 1 of 5

POSITIVE ADJUSTABLE VOLTAGE REGULATOR

ELECTRICAL CHARACTERISTICS(1)(3) ($T_C = 25^\circ\text{C}$ unless otherwise stated)

LM117, IP117, LM117HV, IP117HV								
Symbols	Parameters	Test Conditions		Min.	Typ	Max.	Units	
V _{REF}	Reference Voltage	I _{OUT} = 10mA			1.200	1.250	1.300	V
		10mA ≤ I _{OUT} ≤ I _{MAX} , P ≤ P _{MAX} , 3V ≤ (V _{IN} -V _{OUT}) ≤ V _{MAX}		•	1.200	1.250	1.300	
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line Regulation (2)	3V ≤ (V _{IN} -V _{OUT}) ≤ V _{MAX} , I _{OUT} = 10mA				0.010	0.020	%/V
				•		0.020	0.050	
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load Regulation (2)(3)	10mA ≤ I _{OUT} ≤ I _{MAX}	V _{OUT} ≤ 5V			5	15	mV
			V _{OUT} ≥ 5V			0.1	0.3	%
			V _{OUT} ≤ 5V	•		20	50	mV
			V _{OUT} ≥ 5V	•		0.3	1.0	%
	Thermal Regulation	V _{IN} = 14.58V, I _{OUT} = 1.5A, P _D = 20W, T _A = 25°C, 20ms Pulse				0.030	0.070	%/W
	Ripple Rejection	V _{OUT} = 10V	C _{ADJ} = 0			65		dB
		f = 120Hz	C _{ADJ} = 10μF	•	66	80		
I _{ADJ}	Adjust Pin Current			•		50	100	μA
ΔI _{ADJ}	Adjust Pin Current Change	10mA ≤ I _{OUT} ≤ I _{MAX} , 2.5V ≤ (V _{IN} -V _{OUT}) ≤ V _{MAX}		•		0.2	5	
I _{MIN}	Minimum Load Current	(V _{IN} - V _{OUT}) = 40V		•		3.5	5	mA
		(V _{IN} - V _{OUT}) = 60V (HV Series)		•		3.5	7	
I _{CL}	Current Limit	(V _{IN} - V _{OUT}) ≤ 15V		•	1.5	2.2		A
		(V _{IN} - V _{OUT}) = 40V		•	0.3	0.5		
		(V _{IN} - V _{OUT}) = 60V (HV Series)		•		0.1		
$\frac{\Delta V_{OUT}}{\Delta TEMP}$	Temperature Stability			•		1.0		%
$\frac{\Delta V_{OUT}}{\Delta TIME}$	Long Term Stability	T _A = 125°C, 1000Hrs				0.3	1.0	
e _n	RMS Output Noise (% of V _{OUT})	T _A = 25°C, 10Hz ≤ f ≤ 10KHz				0.001		


Notes

The • denotes the specifications which apply over the full operating temperature range.


- Test conditions unless otherwise stated: $V_{IN} - V_{OUT} = 5\text{V}$, $I_{OUT} = 0.5\text{A}$, $P_{MAX} = 20\text{W}$, $I_{MAX} = 1.5\text{A}$
- Regulation is measured at constant junction temperature, using pulse testing at a low duty cycle. Changes in output voltage due to heating effects are covered under thermal regulation specifications. Load regulation is measured at $\frac{1}{8}$ " below the base of the package on the output pin.
- $V_{MAX} = 40\text{V}$ for LM117, IP117, LM117A, IP117A
 $V_{MAX} = 60\text{V}$ for LM117HV, IP117HV, LM117AHV, IP117AHV

POSITIVE ADJUSTABLE VOLTAGE REGULATOR


APPLICATIONS INFORMATION

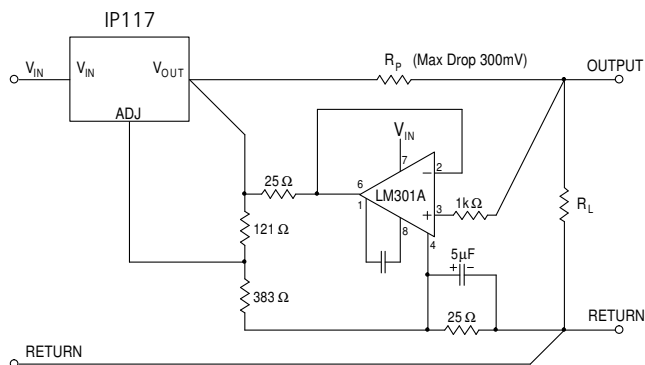

Remote Sensing

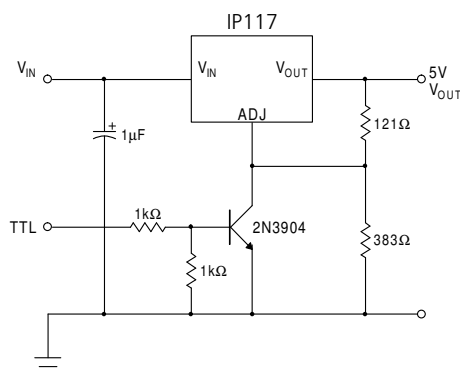


5V Regulator with Shut Down

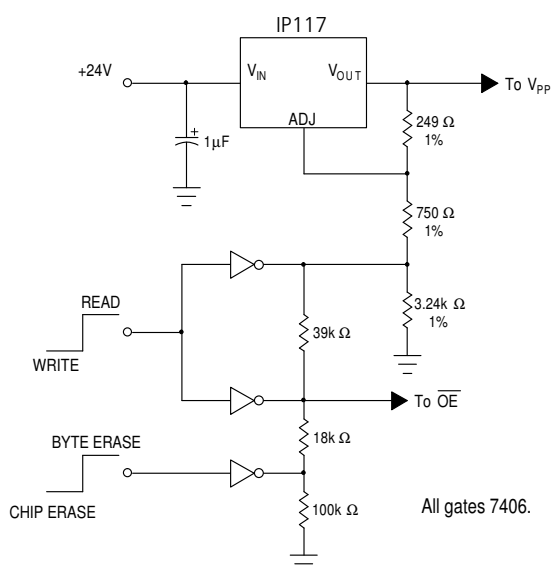


	OE	Vpp
READ	0V	5V
WRITE		
BYTE	5V	21V
CHIP ERASE	12V	21V

2816 EEPROM Supply Programmer for Read / Write Control

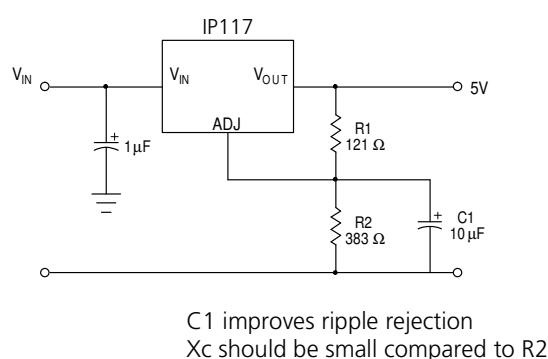

Improving Ripple Rejection

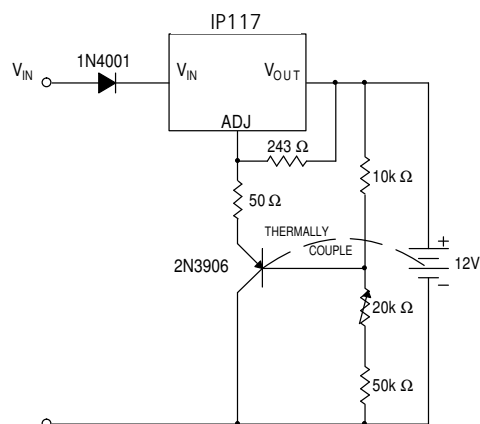


Temperature Compensated Lead-Acid Battery Charger

POSITIVE ADJUSTABLE VOLTAGE REGULATOR

MECHANICAL DATA

Dimensions in mm (inches)

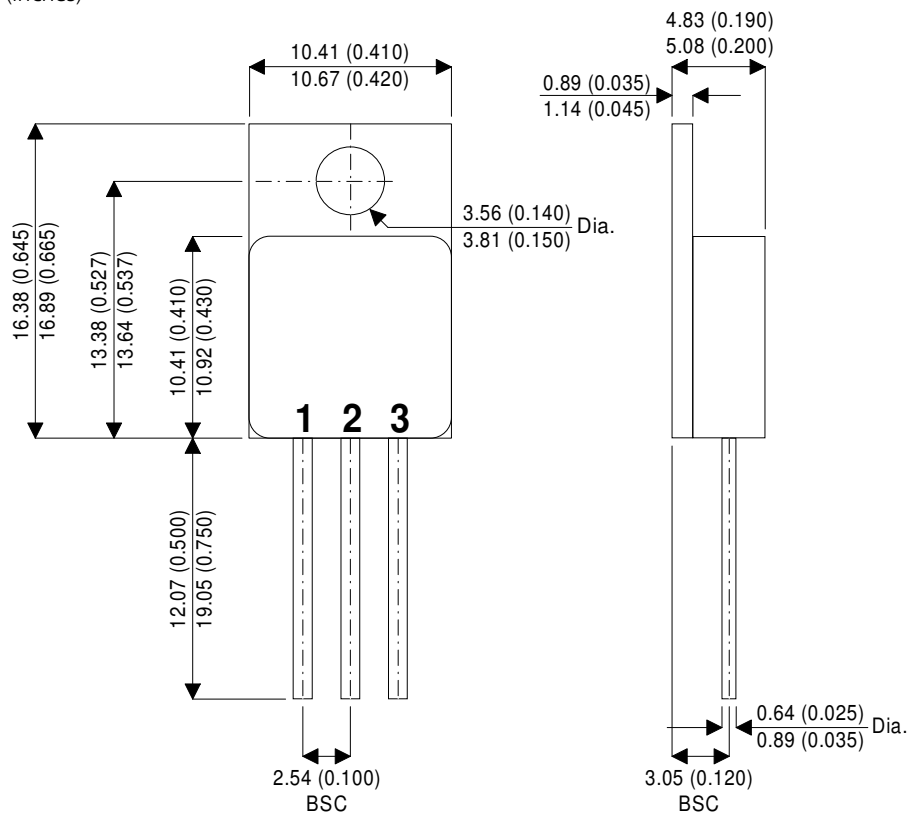

TO-257AA

Pin 1 = ADJ

Pin 2 = V_{OUT}

Pin 3 = V_{IN}

Case = V_{OUT}