

RECOMMENDED
PC MOUNTING

MATERIALS:

Body: Tarnish Resistant Nickel Plated Brass
 Body Mounting Pins: Nickel Plated Brass
 Center Contact: Gold Plated Beryllium Copper
 Center Mounting Pin: Gold Plated Brass
 Dielectric: Teflon per L-P-403


RATINGS:

Operating Voltage: Hands free usage in controlled voltage environments:
 500 Vrms maximum. *For CE compliance:* not
 intended for hand-held use at voltages above 33
 Vrms/70 Vdc.

Operating Temperature: -85°F to +329° F (-65°C to +165°C).
 Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 4788

All dimensions are in inches. Tolerances (except noted): .xx = \pm .02" (.51 mm), .xxx = \pm .005" (.127 mm).
 All specifications are to the latest revisions. Specifications are subject to change without notice.
 Registered trademarks are the property of their respective companies.

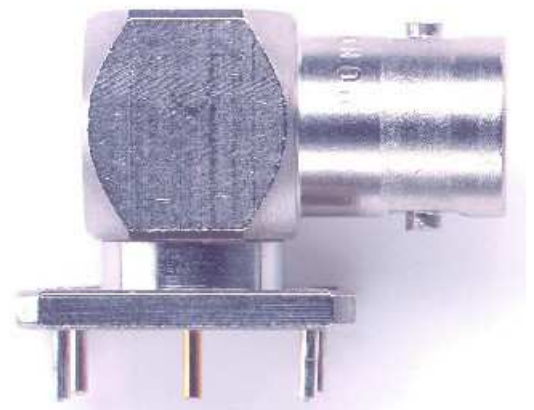

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technicalsupport@pomonatest.com)
 For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com