


Model 5676A Test Probe Set with Replaceable Tips

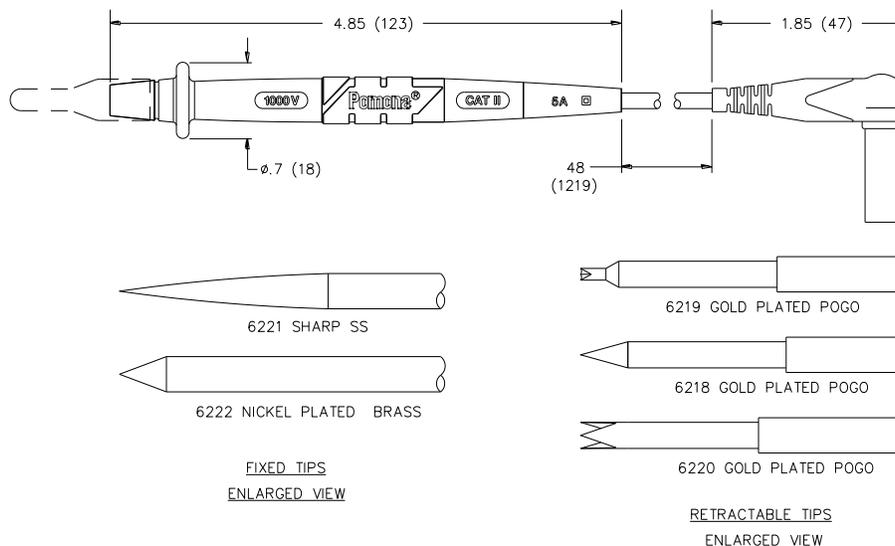

FEATURES:

- Replaceable tip probe set includes a full set of ten replacement tips
- Designed for Fluke, Agilent, and Wavetek-Meternan DMM's with a safety-sheathed banana jack
- Probe incorporates a two-step mold process. First step is Polypropylene for strength; second step is Santoprene® rubber for handling comfort, added insulation protection and wire strain relief
- Replacement tips can be ordered separately, see model 6475
- Probe and banana plug are molded directly onto the wire for robust pull strength
- Wire is a high strand count silicone wire for extreme flexibility and high temperature resistance
- Wear indication with double insulated (dual extruded) silicone leads shows white inner layer for increased safety
- Banana plug is nickel plated Beryllium Copper for long life

MATERIALS:

Probe: Santoprene® rubber, color: gray

Inner Insulation: Polypropylene, color: one black, one red

Tips: Nickel plated Beryllium Copper, stainless steel and Nickel-plated brass

Wire: 18 AWG, 192 x 41 bare copper, Silicone Insulation, O.D. 0.144" (3,66mm). Length: 48" (122cm)

Banana Plug: Nickel plated Brass

Spring: Nickel plated Beryllium Copper

Plug Insulation: Polypropylene, color: one black, one red

RATINGS:

IEC 61010-031, Category II 1000 V

Operating Voltage: 1000 Vrms

Current: 5 Amperes

ORDERING INFORMATION

Model 5676A

Includes a set of one black and one red test lead with ten replaceable tips (two of each shown above).

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.