
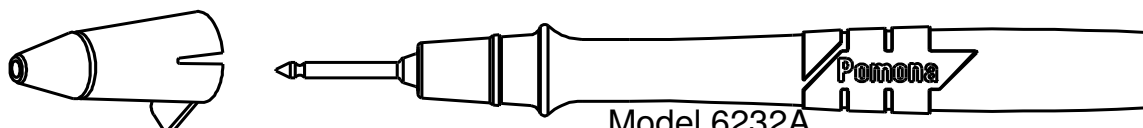


**Model 6286**  
**Standard Tip Probe Set with Right-Angle Test Leads**

Model 6232A  
Modular Test Probe  
Qty 2 - 1 Red, 1 Black

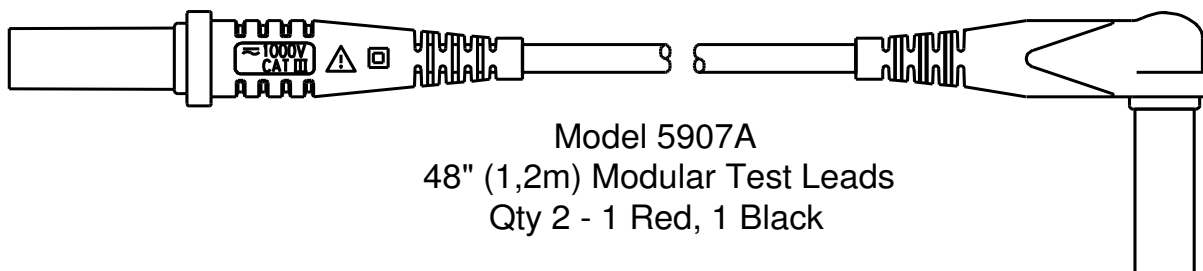

Model 5907A  
48" (1,2m) Modular Test Leads  
Qty 2 - 1 Red, 1 Black

For data sheets / specifications of the kit individual components, visit the Pomona web site at:  
[www.pomonaelectronics.com](http://www.pomonaelectronics.com)

## FEATURES

- Designed to meet IEC 61010-031, the latest international safety standard for test accessories.
- Probe safety jack mates to Pomona's 5907A, 5908A and 5909A Flexible Test Leads.
- Notched probe tip mates into standard 0.080" pin jacks.
- Flexible test lead sets are a perfect interface for the most popular multimeters configured with 4 mm sheathed safety jacks, including Fluke, H-P, Tektronix and Wavetek.
- Plug and housing are molded directly to the cable in an integral one piece design and the wire is double crimped for a long lasting connection.
- Wear indication with double insulated (dual extruded) silicone leads shows white inner layer for increased safety.
- Multi-leaf banana spring material is Beryllium Copper, nickel plated for extended insertion cycle life and low contact resistance.
- High strand count silicone insulated wire offers excellent flexibility and high temperature resistance.
- Test leads can mate to a broad assortment of Pomona probes, alligators, spade lugs, etc.

**USA:** Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500  
**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm 0.02$ " (.51 mm),  
.xxx =  $\pm 0.005$ " (.127 mm). All specifications are to the latest revisions.  
Specifications are subject to change without notice. Registered trademarks are  
the property of their respective companies.