

280x89mm

AC AXIAL FAN

FKA2-28089-A Series

**Features:**

- Motor: Capacitor-Run Induction Motor
- Motor Protection: Thermal Protected
- Bearing Type: Two Ball
- Connection: UL 1430 AWG 22, 300mm Wire Leads or Terminal
- Frame Material: Aluminum Alloy
- Impeller Material: Plastic UL94V-0
- Operating Temp:
Two Ball: -10°C~70°C
- Life Expectancy:
Two Ball: 50,000 Hours


**Fan-S Division**

Model No.	Volt.	Freq.	Current	Power	Rated Speed	Maximum AirFlow		Maximum Static Pressure		Noise Level	Weight
	(VAC)	(Hz)	(A)	(W)	(rpm)	(CMM)	(CFM)	(InAq)	(mmAq)	(dB/A)	(g)
FKA2-28089NBH ** 3F-A	115	50/60	1.80/2.60	180.0/260.0	2800/3000	33.960/39.620	1200/1400	0.050/0.044	1.260/1.110	75.0/78.0	3500
FKA2-28089QBH ** 3F-A	230	50/60	0.78/1.22	177.1/260.0	2800/3000	33.960/39.620	1200/1400	0.050/0.044	1.260/1.110	75.0/78.0	3500



** Indicates "W" (Wire Leads) or "T" (Terminal)

Noise is measured at the distance of one (1) meter from the axis of intake.

50Hz

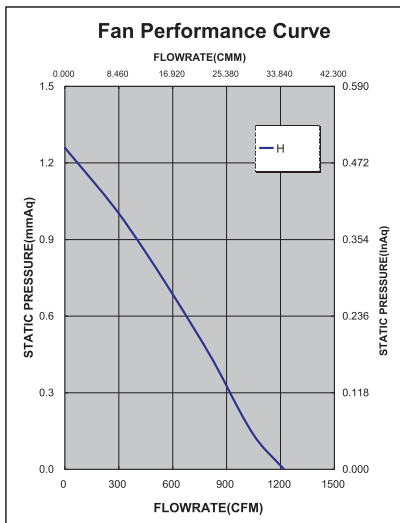

60Hz

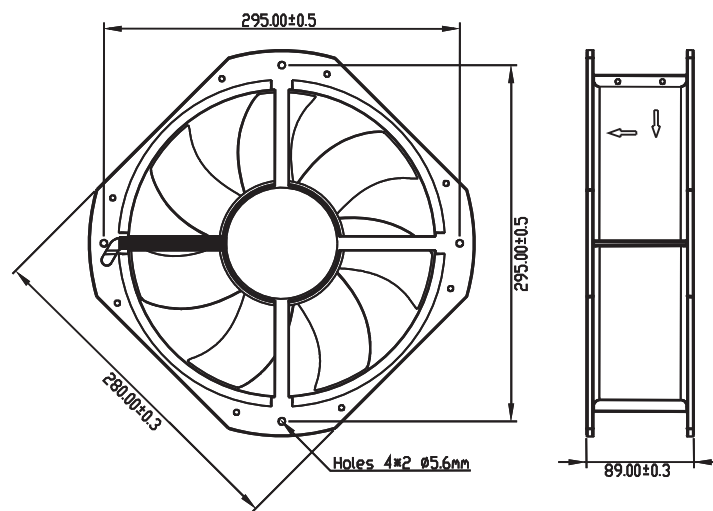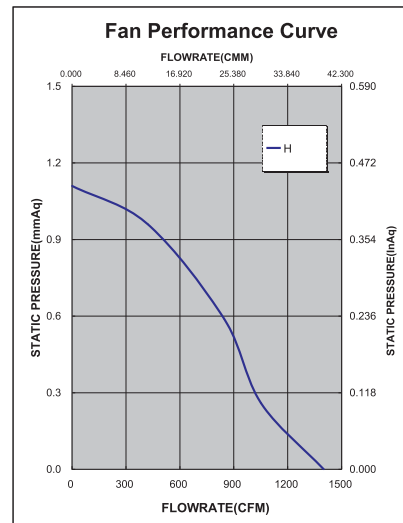

Qualtek
Electronics Corporation

ISO-9001 Company

www.qualtekusa.com