





Screw-Wire Protector Clamp Connection Panel Mount Conta-Strips™



Developed for quick and efficient wire-to-wire connections in lighting, appliances, HVAC and industrial equipment/devices where low cost, wire terminations are needed. Conta-Strips™ are modern replacements for traditional Double Row Barrier Style Terminal Blocks. Unlike Barrier Blocks, they feature a touch-proof design with totally recessed metal parts which eliminate any chance of accidental shorts and minimize the possibility of electrical shock. Easy to use, Conta-Strips™ are supplied with open clamps ready for immediate wire hookup. Simply, strip the wire, insert and tighten the screw for a reliable electrical connection. Conta-Strips™ eliminate the need for costly and labor intensive wire preparations associated with the use of spade or ring lugs. Conta-Strips™ are available in 12 Pole Strips which can be readily cut to any pole position using a saw or a utility knife. Or, they can be ordered pre-cut to the required number of poles. Use versions with standoff feet for Industrial Control Equipment Applications such as motor control where maximum creepage and clearance distance is a design consideration.

Feed-Through Standoff Feet

- Side Wire Entry
- Housing: Polyamide 6.6
- Wire Protector/Center Barrier: Stainless Steel
- Insert: Nickel Plated Copper Alloy
- Screw: Zinc-Yellow Chromate Plated Steel
- Color: White, Translucent
- Imprinting Available

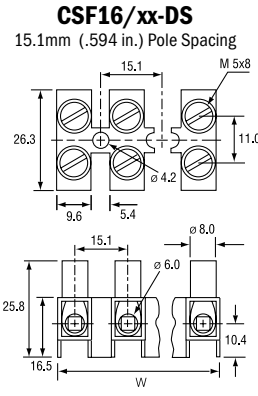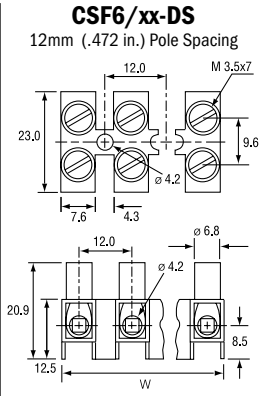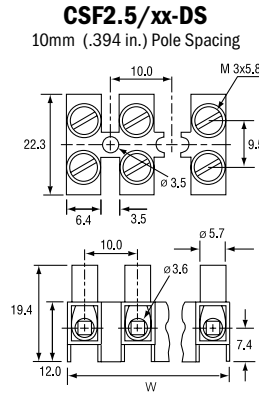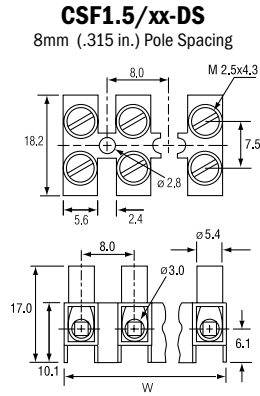

Ordering Information: xx= No. of Poles	CSF1.5/xx-DS			CSF2.5/xx-DS			CSF6/xx-DS			CSF16/xx-DS		
	Cat. No.	Width - W mm (in.)	Std. Pack	Cat. No.	Width - W mm (in.)	Std. Pack	Cat. No.	Width - W mm (in.)	Std. Pack	Cat. No.	Width - W mm (in.)	Std. Pack
2	27025.3	13.6 (.54)	100	27121.3	17.0 (.67)	100	27217.3	20.0 (.79)	100	27289.3	25.0 (.98)	50
3	27026.3	21.5 (.85)	100	27122.3	27.0 (1.06)	100	27218.3	32.0 (1.26)	100	27290.3	40.0 (1.58)	50
4	27027.3	29.5 (1.16)	100	27123.3	37.0 (1.46)	100	27219.3	44.0 (1.73)	100	27291.3	55.0 (2.17)	50
5	27028.3	37.4 (1.47)	100	27124.3	47.0 (1.85)	100	27220.3	56.0 (2.21)	100	27292.3	70.0 (2.76)	50
6	27029.3	45.4 (1.79)	50	27125.3	57.0 (2.24)	50	27221.3	68.0 (2.68)	50	27293.3	86.0 (3.39)	25
7	27030.3	53.3 (2.10)	50	27126.3	67.0 (2.64)	50	27222.3	80.0 (3.15)	50	27294.3	101.0 (3.98)	25
8	27031.3	61.3 (2.41)	50	27127.3	77.0 (3.03)	50	27223.3	92.0 (3.62)	50	27295.3	116.0 (4.57)	25
9	27032.3	69.2 (2.72)	50	27128.3	87.0 (3.43)	50	27224.3	104.0 (4.10)	50	27296.3	131.0 (5.16)	25
10	27033.3	77.2 (3.04)	50	27129.3	97.0 (3.82)	50	27225.3	116.0 (4.57)	25	27297.3	146.0 (5.75)	10
11	27034.3	85.1 (3.35)	50	27130.3	107.0 (4.21)	50	27226.3	128.0 (5.04)	25	27298.3	161.0 (6.34)	10
12	27035.3	93.0 (3.66)	50	27131.3	117.0 (4.61)	50	27227.3	140.0 (5.51)	25	27299.3	176.0 (6.93)	10

Electrical Ratings:	CSF1.5/xx-DS	CSF2.5/xx-DS	CSF6/xx-DS	CSF16/xx-DS
IEC 947-7-1	400V / 18A / 1.5mm ²	400V / 26A / 4mm ²	400V / 44A / 6mm ²	800V / 82A / 16mm ²
CSA LR 703305	300V / 15A / 22-16 AWG	600V / 30A / 18-12 AWG	600V / 40A / 18-10 AWG	600V / 65A / 18-6 AWG
E196136	600V / 20A / 22-12 AWG	600V / 30A / 22-10 AWG	600V / 40A / 20-8AWG	600V / 63A / 14-6 AWG
Insulation Stripping Length mm (in.)	5 (.20)	6 (.24)	7 (.28)	8 (.32)
Tightening Torque Nm (lbf.-in.)	.75 (6.5)	.85 (7.5)	.85 (7.5)	2.4 (21.0)
Screw Hole Diameter mm (in.)	3.0 (.12)	3.5 (.14)	4.0 (.16)	5.5 (.22)
Mounting Hole Diameter mm (in.)	2.8 (.110)	3.5 (.138)	4.2 (.165)	4.2 (.165)
Accessories:				
External Insulated Jumpers:*				
2 Pole	Cat.No. 27435.4 Std.Pack 50	Cat.No. 27447.4 Std.Pack 50	Cat.No. 27459.4 Std.Pack 50	Cat.No. 27471.4 Std.Pack 20
3 Pole	Cat.No. 27436.4 Std.Pack 50	Cat.No. 27448.4 Std.Pack 50	Cat.No. 27460.4 Std.Pack 50	Cat.No. 27472.4 Std.Pack 20
4 Pole	Cat.No. 27437.4 Std.Pack 50	Cat.No. 27449.4 Std.Pack 50	Cat.No. 27461.4 Std.Pack 50	Cat.No. 27473.4 Std.Pack 20
12 Pole†	Cat.No. 27445.4 Std.Pack 10	Cat.No. 27457.4 Std.Pack 10	Cat.No. 27469.4 Std.Pack 10	Cat.No. 27481.4 Std.Pack 5
Marking Plates:				
Blank		Cat.No. 27495.7 Std.Pack 25	Cat.No. 27496.7 Std.Pack 25	Cat.No. 27497.7 Std.Pack 25
Numbered 1 - 12		Cat.No. 27498.7 Std.Pack 25	Cat.No. 27500.7 Std.Pack 25	Cat.No. 27502.7 Std.Pack 25
Numbered 13 - 24		Cat.No. 27499.7 Std.Pack 25	Cat.No. 27501.7 Std.Pack 25	Cat.No. 27503.7 Std.Pack 25
Isolation Partition:		Cat.No. 27487.4 Std.Pack 10	Cat.No. 27487.4 Std.Pack 10	
Mounting Pins:		Cat.No. 27490.4 Std.Pack 100	Cat.No. 27490.4 Std.Pack 100	Cat.No. 27491.4 Std.Pack 100

* For Electrical Ratings see corresponding Conta-Strips
† Other Pole Positions available, contact Conta-Clip, Inc.

Note: Dimensions on Diagrams are shown in mm. Metric Conversion: in. = mm x 0.03937

