


SERIES KC



CHARACTERISTICS

- Flat illuminated
- Diffuser lenses
- Indicator light options
- Only 8.2 mm High

PACKAGING

Type of Packaging: Tray

SPECIFICATIONS

Circuit: SPST

Current Rating: 50 mA @ 12VDC max

LED Rating: 3VDC40mA


Contact Resistance: 100 mΩ max initial

Insulation Resistance: 100 MΩ min.

Operating Force: 250 gf ±50 gf


Total Travel: 0.3 mm

HOW TO ORDER

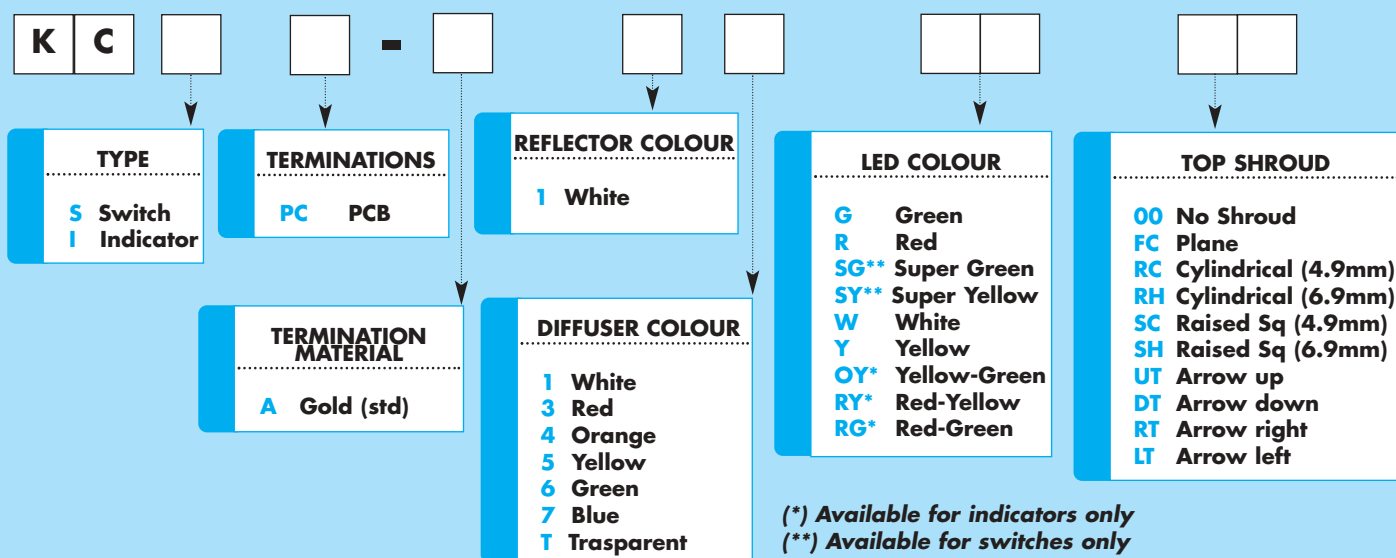


DIMENSIONS

Keyswitch

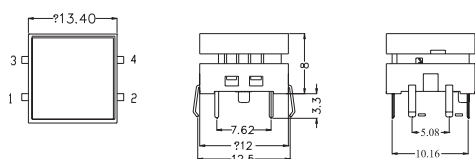


Part N°: **KCS-PCxxx00**
(define xx)

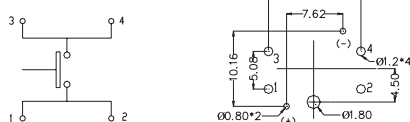


P.C.B. Layout

Indicator Light


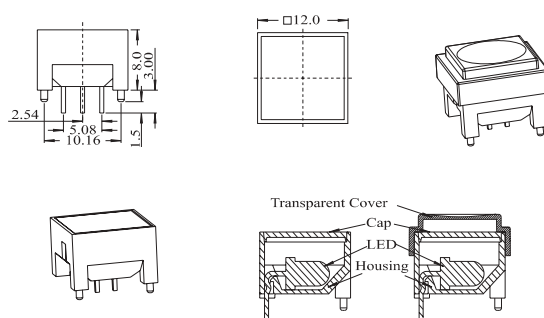


Part N°: **KCI-PCxxx00**
(define xx)





P.C.B. Layout



TRANSPARENT TOP SHROUD STYLES





Cylindrical Shroud
h= 4.9 mm






Cylindrical Shroud
h= 6.9 mm






Plane shroud






Raised Square Shroud (plane)
h= 4.9 mm



Arrow up/down



Arrow left/right



Raised Square Shroud (plane)
h= 6.9 mm