




SERIES R13112

- Round Power Rocker Switches



AGENCY APPROVALS



CHARACTERISTICS

- Miniature 19 mm Round Hole
- Snap-in Mounting
- Waterproof Cover (optional)

MATERIALS

Housing: Nylon
Rocker: PC or Nylon
Contacts: Silver Plated Brass

SPECIFICATIONS

Contact Resistance: <50 mohm
Insulation Resistance: 10⁸ Ohms min (1500 Volts across open contacts)
Electric Life: 10.000 make & brake cycles @ full load
Mechanical Life: 30.000 make & brake cycles

TEST SPECIFICATIONS

High Volt Resistance: >1500 Volts for 1 Min
Ambient temperature: Terminal side -20, +85°C, Actuating side -20, +55°C
Storage temperature: -30, +80°C
Humidity: Max 85°C
Flammability: UL94 V-2

HOW TO ORDER

R	1	3	1	1	2	-			2							F		A
---	---	---	---	---	---	---	--	--	---	--	--	--	--	--	--	---	--	---

N° OF POLES		
5	SPST	
1	SPDT	

RATING	
2	6A @ 250 VAC

ELECTRICAL FUNCTIONS	
1	on none on
2	on none (on)
3	on off on
4	(on) off (on)
5	on off (on)
9	on none off
B	on none (off)

BODY COLOUR	
B	Black
W (Δ)	White

(Δ) Min qty required

ACTUATOR	
C	Concave
D	Concave Dual Injection
T	Lighted (Lens)
S	Lighted (Spot)
L	Led (Dot)
M	Toggle (Window Led)



COLOUR	
2	Black (std)
3	Red
5	Amber
6	Green

MARKING	
E	No markings
01	On - Off
Other markings please enquire	

TERMINALS	
F	Faston

APPROVALS	
A	EU + USA

LAMP	
0	No Lamp
1	125 VAC
2	250 VAC
3	12 VDC
4	24 VDC

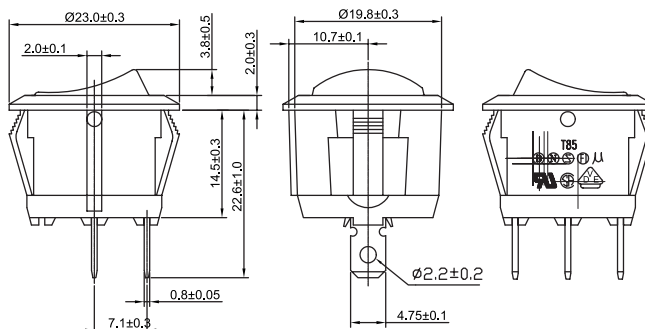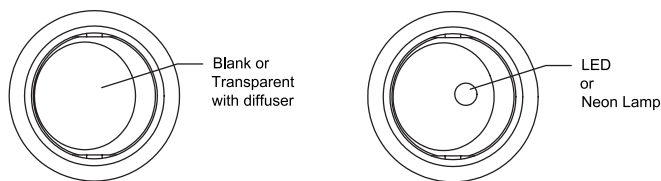

Panel Cut-out

