


DIL Package




- Twin contact for reliability
- UL high Temp Material
- Recessed Actuator & Tape seal
- Light detent


Type of Packaging: Tube
(Actuator in On Position)

Rating: 25 mA max @ 24VDC max
Contact Resistance: 50 mΩ max initial
Insulation Resistance: 1000 MΩ min @ 100V
Dielectric strength: 500 VDC for 1 min.
Temperature: Operating -20°C to +85°C
Operating Force: max 1000 Gr
Operating Life: 2,000 operations per Switch Pos
Soldering specifications: **Manual** 350°C for max 3 sec, **Reflow** max 240°C for max 20 sec.

HOW TO ORDER

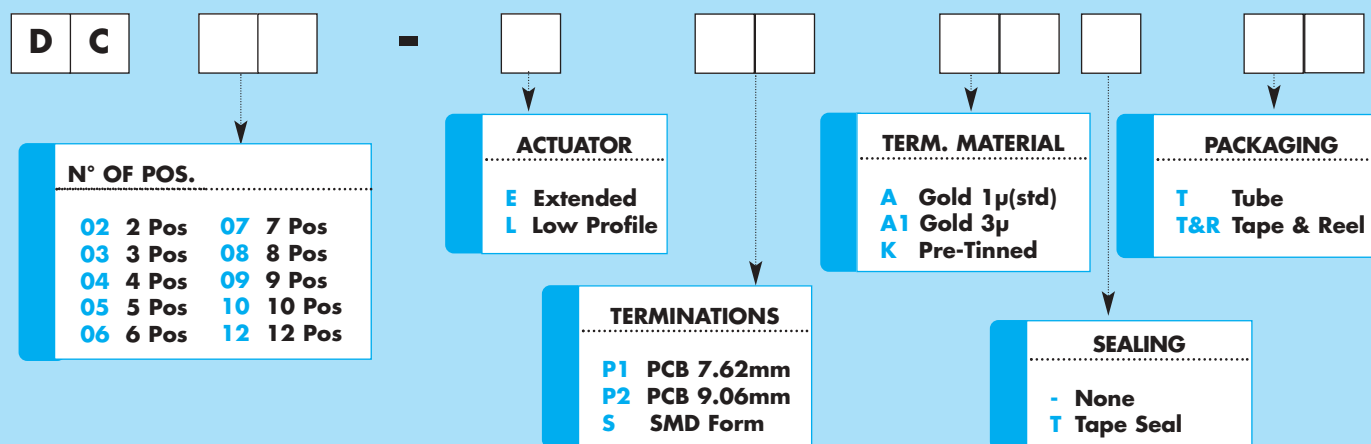


DIMENSIONS

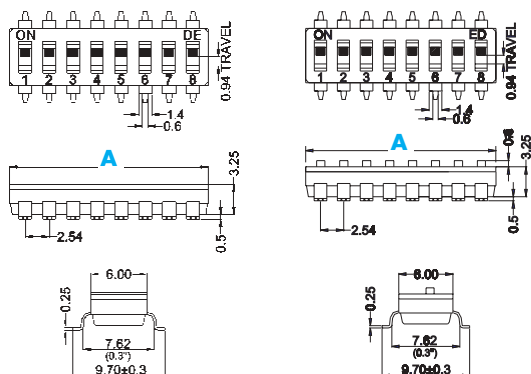SMD Type (S)

Part N°: DC08-LSAxx

Part N°: DC08-ESAxx
Define x Options


PCB Type (P1, P2)

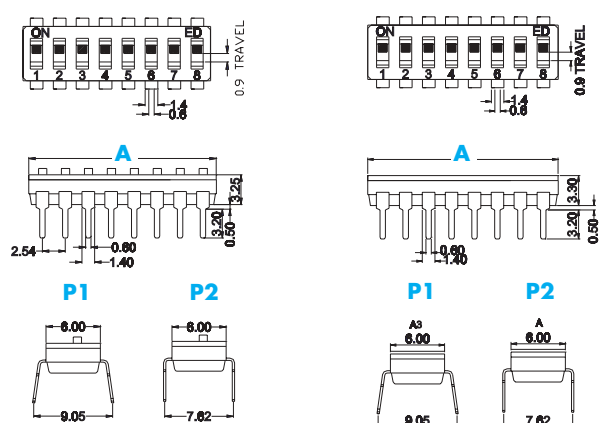


Part N°: DC08-EPxAxx

Part N°: DC08-LPxAxx


P.C.B. Layout SMD



Contact Form



P.C.B. Layout T/H



Dimensions & Packaging

Positions	2	3	4	5	6	7	8	9	10	12
A in mm	5.08	7.62	10.90	13.44	15.98	18.52	21.06	23.60	26.14	31.22
Qty/Tube	100	69	48	39	33	28	25	22	20	17