




SERIES DH

- Auto inserting type




CHARACTERISTICS

- Same size with IC, can be assembled by any automatic IC inserted
- Molded 0.3" integrated circuit packing outline allowing automatic insertion
- Smaller size makes better heat convention during PC board wave soldering
- Top tape sealed to withstand wave soldering, board washing
- UL94V-0 Materials
- Twin contact designed to ensure stable contact
- Gold plated contact

SPECIFICATIONS

Rating: Switching 25mA, 24 @VDC
Non Switching 100 mA@ 50 VDC
Contact Resistance: 50 m Ω Max at initial
100 m Ω Max after life test
Insulation Resistance: 1,000 M Ω @100 VDC
Dielectric Strength: 500 VDC, 1 Min
Capacitance between adjacent switches: 5pF Max
Temperature: Operating -25°C to + 70°C
Storage -40°C to +85°C
Life: 2,000 Operations
Humidity: 95% RH @ 40°C for 96 Hours
Vibration: per Mil - STD-202F, method 204D
Solderability: After flux 230 $\pm$ 5°C for 5 $\pm$ 0.5 secs 95% coverage
Soldering Heat: 260 $\pm$ 5°C for 5 $\pm$ 1 secs.



HOW TO ORDER

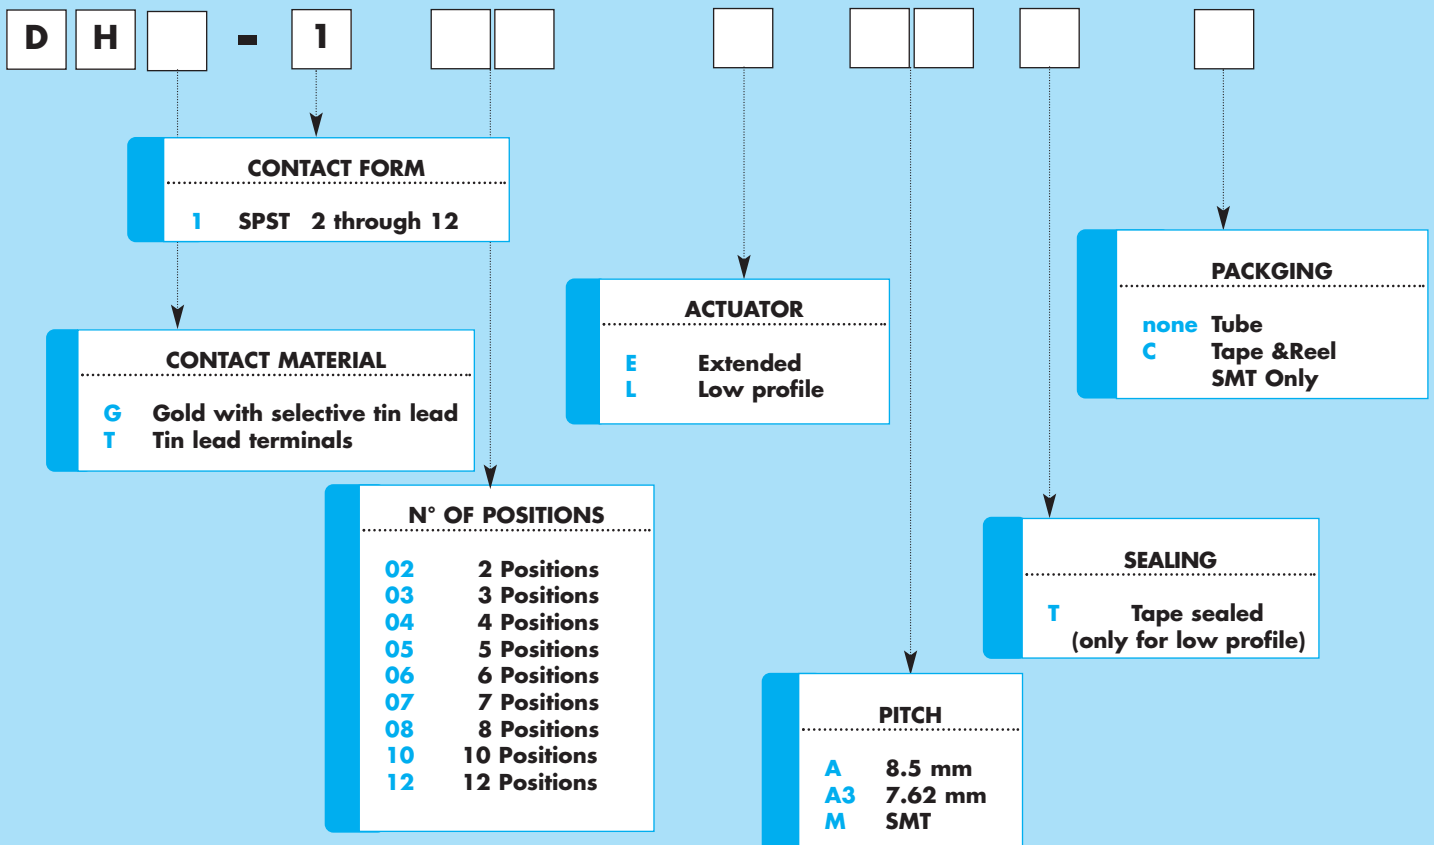

DH




MODEL AND DIMENSIONS

A
Through hole

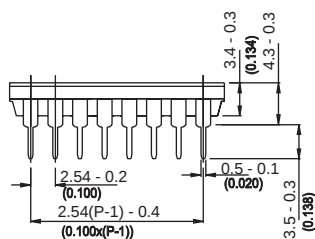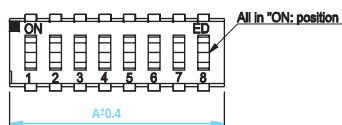



Position	2	3	4	5	6	7	8	10	12
A Dim	6.88	9.42	11.96	14.5	17.04	19.58	22.12	27.20	32.28

M
Surface Mount

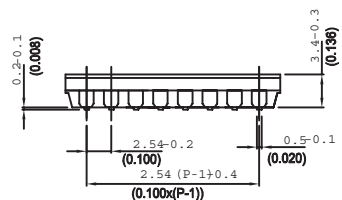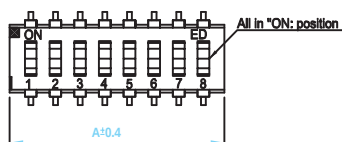



L Low profile Actuator
Part N° shown: DHT-108LAT

P.C.B. LAYOUT (Top view)

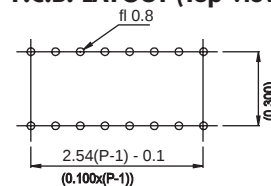


E Extended Actuator

P.C.B. LAYOUT (Top view)

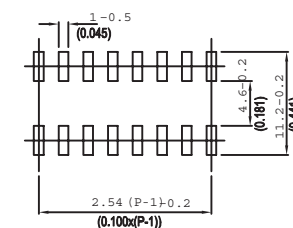

L Low profile Actuator
Part N° shown: DHT-108LMT



E Extended Actuator

PACKAGING

Tape & Reel: 200 pcs for reel

