

## SERIES PC



## CHARACTERISTICS

- Miniature DIL Pushbutton
- Side Actuated
- Dual LED
- Add-on front Cap
- 2.5 mm Travel

## SPECIFICATIONS

**Rating:** 200 mA max @ 36VDC  
**Contact Resistance:** 40 mΩ max initial  
**Insulation Resistance:** 100 MΩ min @ 500V  
**Temperature:** Operating -10°C to +60°C  
**Operating Life:** 10.000 operations  
**Operating Force:** 300±100Gf

## HOW TO ORDER



### ELECTRICAL FUNCTION

52 DPST off -(on)


### CAP TYPE

- A** Bare Transparent Stem
- S** See-through Cap



### LED COLOR

LED TYPE	ONE COLOR	TWO COLOR
R-RED	R	(RG) (GY)
G-GREEN	G	(RY) (GB)
Y-YELLOW	Y	(RB) (YB)
B-BLUE	B	


## DIMENSIONS

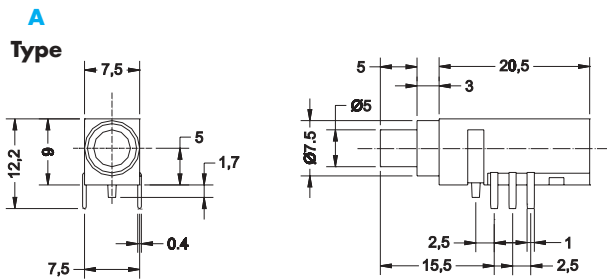

Part N° shown: PCA-x  
(define x)

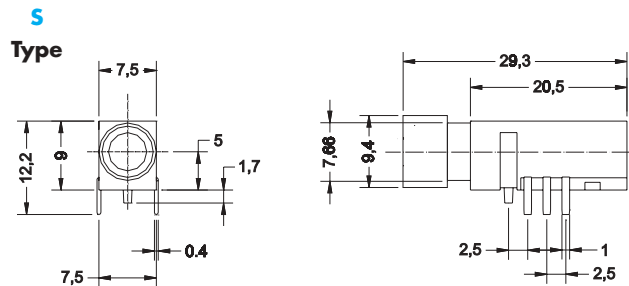

Part N° shown: PCS-xK  
(define x)



### P.C.B. layout

