


SERIES R6

- On-Off Tiny Power Switches
- 6 Amps



Single Pole

AGENCY APPROVALS



CHARACTERISTICS

- Miniature Rocker Switch SPST
- Only 9.8 mm wide

MATERIALS

Housing: Nylon
Rocker: PC or Nylon
Contacts: AgCdO


SPECIFICATIONS

Contact Resistance: <50 mohm
Insulation Resistance: 10⁹ Ohms min (5000 Volts across open contacts)
Electric Life: 10.000 make & brake cycles @ full load
Mechanical Life: 30.000 make & brake cycles

TEST SPECIFICATIONS


High Volt Resistance: >1500 Volts for 1 Min
Ambient temperature: Terminal side -20, +85°C, Actuating side -20, +55°C
Storage temperature: -30, +80°C
Humidity: Max 85°C
Actuating Force: 4 - 8 N (depending on switch function)
Flammability: UL94 V-2

HOW TO ORDER

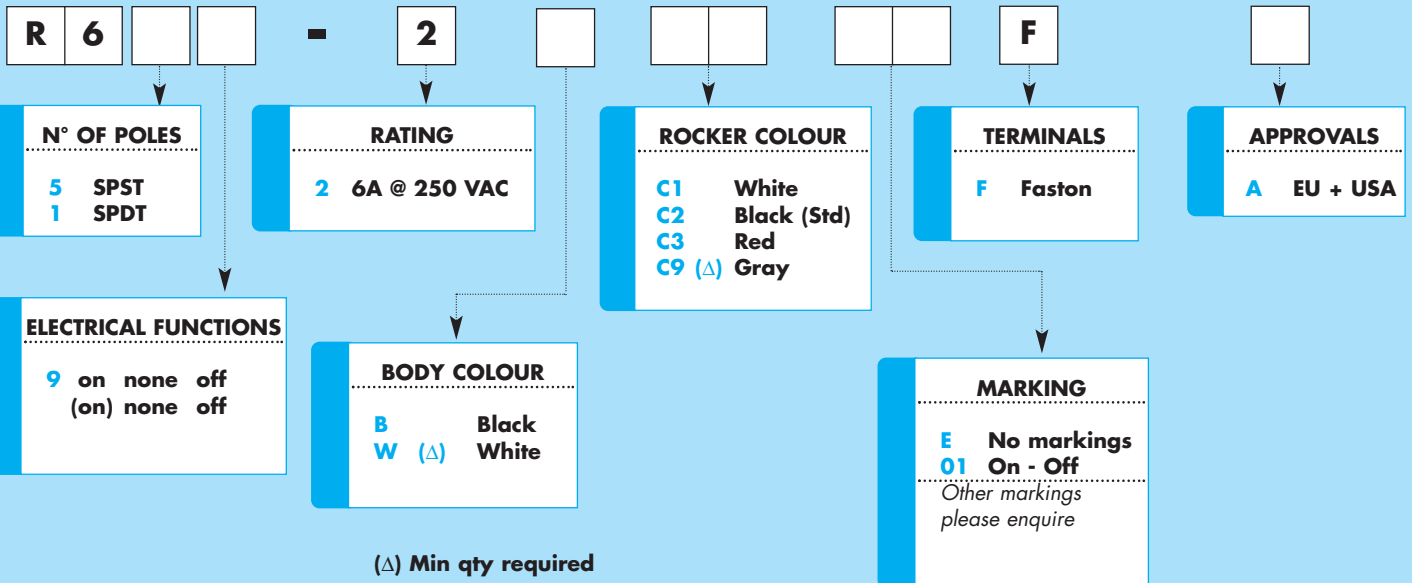

Panel cut out

Z	Y	X
0.70~1.25	6.65~6.75	19.20~19.30
1.25~2.00	6.65~6.75	19.25~19.35
2.00~3.00	6.65~6.75	19.30~19.40



- * UL File: No.104190 (S)
- * VDE File: No.100046

