

SERIES SL15



CHARACTERISTICS

- Small Dimensions
- Agency approvals
- SPST & SPDT
- Flush Actuator

SPECIFICATIONS


Rating: 10 A @ 250VAC μ T85
Contact Resistance: 20 m Ω max
Insulation Resistance: 100 M Ω min @ 500V
Dielectric Strength: 1000 VAC for 1 min

MATERIALS

Base: Phenolic UL 94V-2 min
Frame: Steel
Actuator: PBT + 15%G, UL 94V-2 min
Contact Spring: Steel
Moving Contact: Silver plated Copper
Terminals: Silver plated Copper




HOW TO ORDER

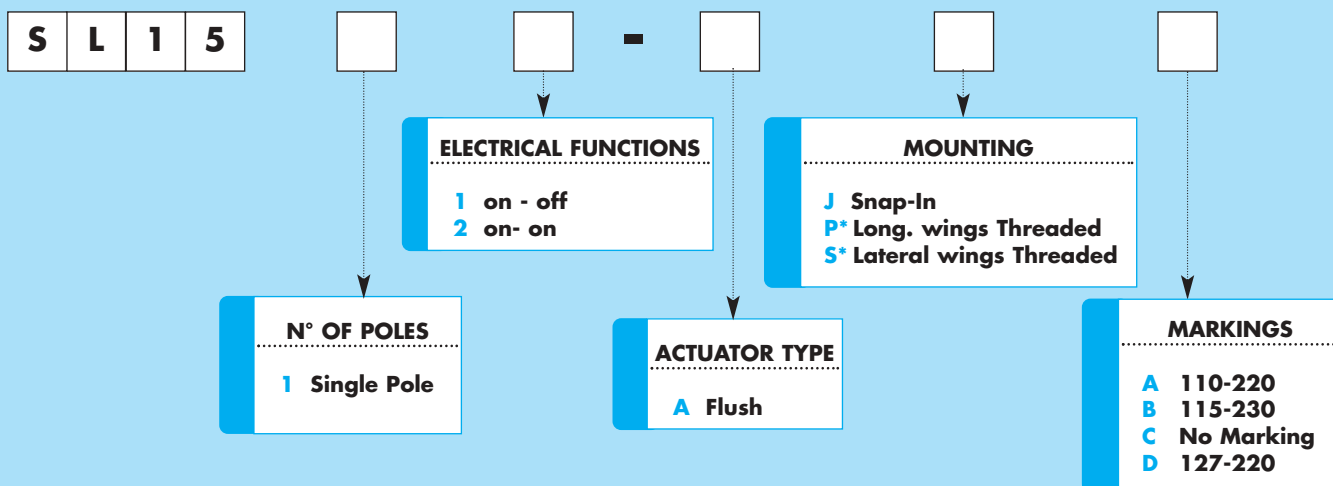

(*) frame can be black or zinc plated


DIMENSIONS

Snap In Mounting

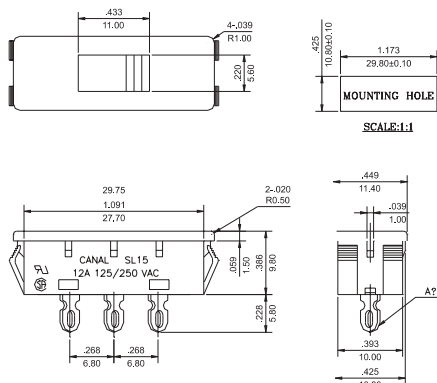

Part N° shown: SL15-12AJB

Threaded Holes Mounting on Steel Frame

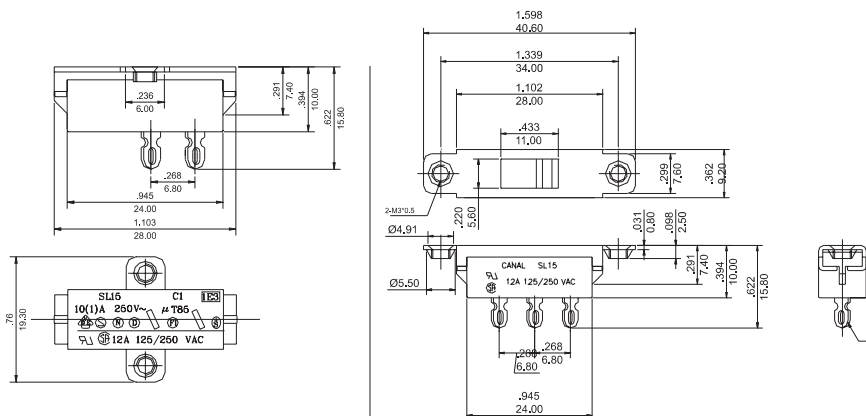

Part N° shown: SL15-11ASB

Part N° shown: SL15-12APB