

SERIES EDC



CHARACTERISTICS

- Ultra-miniature
- 2 LED, SMD Tact switch

PACKAGING

Qty reel: 2900
Type of Packaging: Tape & Reel

SPECIFICATIONS

Rating: Switching 50 mA @ 12VDC max
Contact Resistance: 500 mΩ max initial
Insulation Resistance: 100 MΩ min @ 100V
Temperature: Operating -20°C to +70°C
Operating Life: 30.000 operations
Operating Force: 160 +75/-30 gf
Soldering specifications: Reflow 240°C max 20 secs

HOW TO ORDER


E D C



LED COLOR

RR	YY	GG
RG	RY	RB
YB	GB	

DIMENSIONS

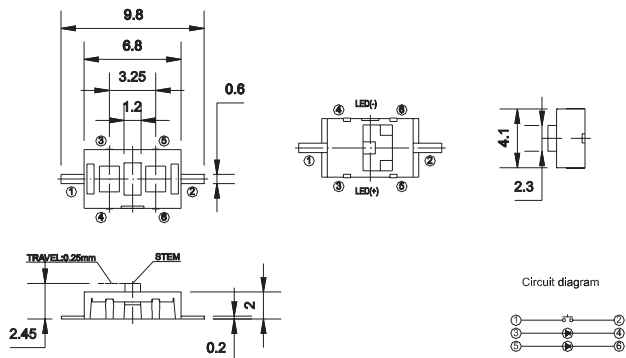

Part N° shown: EDCxx