


SERIES KL22

- ON - OFF Switch
- 5 Disk Tumblers
- Double Bitted Keys



CHARACTERISTICS

- ON-OFF Switch
- 5 Disk Tumbler cylinder, Double bitted Keys
- 90° Key-turn


SPECIFICATIONS

Contact Rating: 4A @ 125 VAC or 28 VDC - 2A @ 250 VAC
Contact Resistance: <math><10\text{ m}\Omega</math>
Insulation Resistance: 10° Ω min.
Dielectric Strength: 1000 V RMS Min @ sea level
Electric Life: 6.000 make & break cycles @ full load

MATERIALS

Lock Housing: Zinc alloy Die-casted & Nickel plated
Cylinder: 5 Disk tumbler in Zinc alloy Die-casted & Nickel plated
Keys: Brass or Brass Nickel-plated
Contacts: Hard Copper alloy Silver plated
Mounting Nut: Zinc alloy Die-casted & Nickel plated

HOW TO ORDER

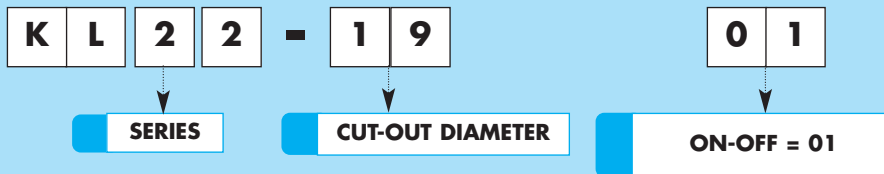

(::) Same Key supplied standard

