

**PB-LWH-01**

**High Capacity**



**BATTERY SPECIFICATIONS**

<b>Model No:</b> PB-LWH-01
<b>Energy:</b> 171 Wh
<b>Voltage Range:</b> 10.0V min.; 14.8V nom.; 16.8V max.
<b>Nominal Capacity:</b> 11.6 Ah @ 500mA @ 23°C (74°F)
<b>Maximum Discharge:</b> 5.0 A continuous @ 23°C (74°F)
<b>Maximum Pulse Discharge:</b> 7.5 A for 5 seconds @ 23°C (74°F)
<b>Energy Density:</b> 171 Wh/kg, 269 Wh/l
<b>Weight:</b> 998 grams (2.2 lbs.)
<b>Cycle Life:</b> > 300 cycles @ C/5 to 80% of initial capacity @ 100% depth of discharge
<b>Discharge Operating Temp:</b> -30° C to +60° C (-22°F to 140°F)
<b>Storage Temp:</b> -20° C to 60° C (-4°F to 140°F)
<b>Self-Discharge:</b> < 3% per month @ 25°C (77°F)
<b>Housing:</b> Hard plastic, black, lusterless, UL 94 V-0, NORYL
<b>Connector:</b> LEMO HEN.1F.305.XLNP
<b>Mating Connector:</b> LEMO FGN.1F.305.YLC
<b>Flat Contacts:</b> Copper alloy with gold plating over nickel plating
<b>Communication:</b> SMBus v1.1 communication protocol SBD v1.1 data set support
<b>State of Charge Indicator:</b> LCD Displays
<b>Safety:</b> See Material Safety Datasheet – MSDS055
<b>Transportation:</b> See MSDS055
<b>Harmonized Tariff Code:</b> 8507.80.0000
<b>NSN:</b> TBD
<b>Manufacturers CAGE Code:</b> 03UN7
<b>Charging:</b> Charge at constant voltage of 16.8 Volts in a temperature range of 0°C to 45°C, limiting current to 3.0 A max, at 23°C, until current declines to 200 mA.

**APPLICATIONS**

- Military Training Systems
- Back-up Server Power
- Ruggedized Portable Electronics

**KEY FEATURES**

- SMBus v 1.1 smart battery technology compliant
- Smart battery data specification (SBD) v1.1 dataset
- Immersion compliant per MIL-STD-810G, Section 512.5
- EMI compliant per MIL-STD-461F (contact Patco Electronics for details)
- High energy density

**COMPATIBLE CHARGERS**

- **PC-3200M/C** 32-station bulk smart charger
- **PC-6805** 8-bay tactical portable smart charger
- **PC-6010-02** 1-bay tactical portable smart charger
- **PC-6500** dual battery desk top charger
- **PC-6200** single battery desk top charger

**COMPATIBLE CABLES**

- **PE-CC2-02** charge cable for PC-6200 charger
- **PE-CC2-03** charge cable for PC-6500 charger
- **PE-CC2-04** discharge cable


The information contained herein is for reference only all specifications subject to change without notice

PATCO Electronics is a division of TRC | 5250 140<sup>th</sup> Ave North | Clearwater, FL 33760


Tel 727.535.0572 | Fax 727.535.9691 | www.trci.net

October 2013 | PB-LWH-01 | Rev.07


ISO 9001:2008

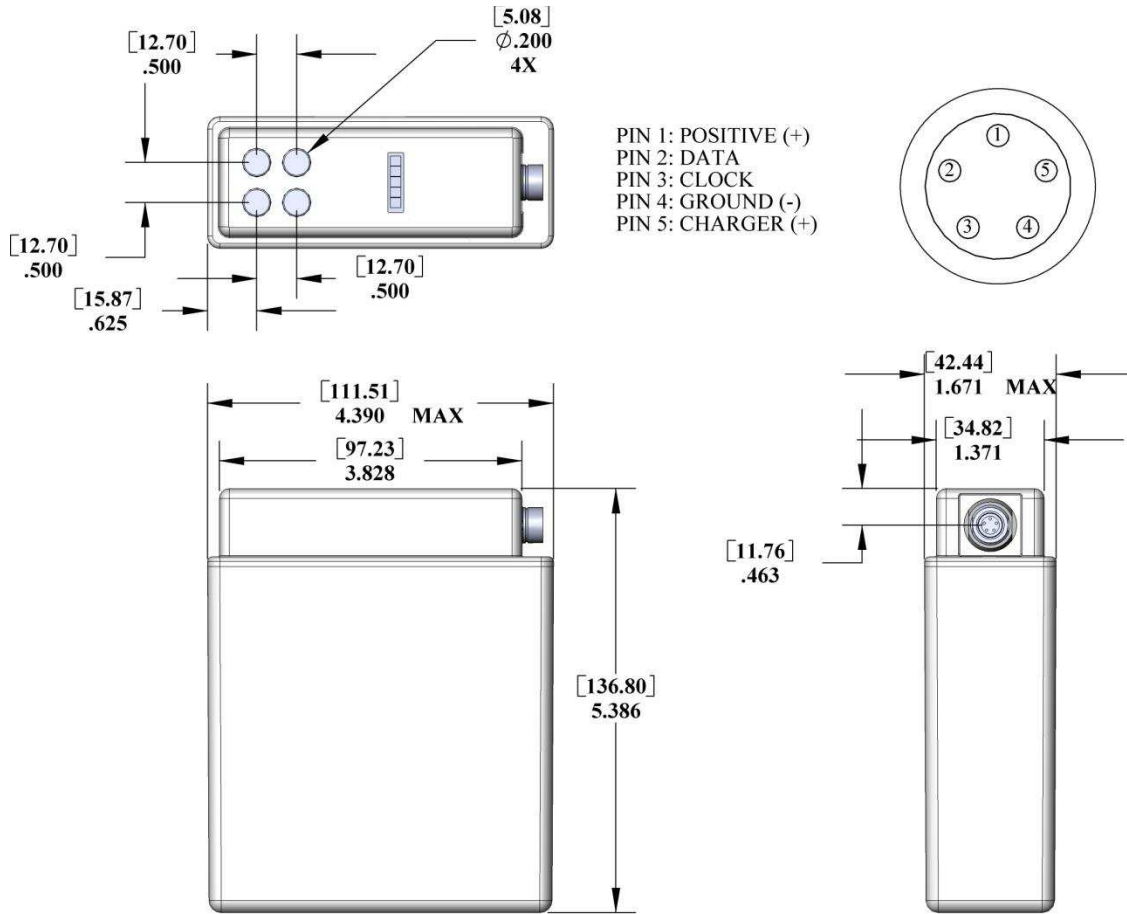

PIN 1: POSITIVE (+)  
 PIN 2: DATA  
 PIN 3: CLOCK  
 PIN 4: GROUND (-)  
 PIN 5: CHARGER (+)



Dimension in: inches [mm]

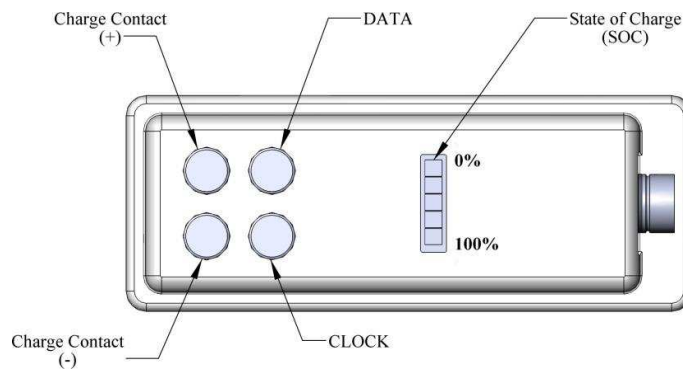

The information contained herein is for reference only all specifications subject to change without notice

PATCO Electronics is a division of TRC | 5250 140<sup>th</sup> Ave North | Clearwater, FL 33760

Tel 727.535.0572 | Fax 727.535.9691 | www.trci.net

October 2013 | PB-LWH-01 | Rev.07

ISO 9001:2008